

datasheet

CDL is a wet label, adjustable in-grade uplight CDX with an integral driver that is suitable for power washing. It is adjustable +/- 10° (total 20°) and is rotatable 120° front and back. It comes in 4 CCTs or RGBW + tunable white with a stainless steel finish. The static white driver is capable of 3 dimming protocols.

TECHNICAL DATA

TECHNICAL DATA					
Wattage / Input	10W (Static White - 120-277VAC) 12W (RGBW+Tunable White - 120-277VAC)				
	,				
Power Supply	Integral (0-10V, ELV, Triac Dimming on Static White)				
Construction	Body: Cast Stainless Steel 304 Alloy Lens: 0.4" Thick, Clear, Non-Skid or Frosted Tempered Glass Lens Frame: Threaded "Bottle Cap"				
ССТ	2700K, 3000K, 3500K, 4000K, RGBW+Tunable White				
CRI	>80				
Initial Lumens	1334 lm (3000K - Static White) 750 lm (3000K - RGBW+Tunable White)				
Efficacy	133.4 lm/W (3000K - Static White) 62.5 lm/W (3000K - RGBW+Tunable White)				
Optics	14°, 25° (Static White) 18°, 24° (RGBW+Tunable White)				
Finishes	Stainless Steel				
Fixture Dimensions	Ø5.75" x 8.0" h				
LED Source	Citizen LED COB, Araya LED Module				
IP Rating	IP68, IP69				
Driveover Rated	11,000 lbs (30mph)				



Fixture Dimensions Ø5.75" x 8.0" h See Full Drawing on page 2

ORDERING INFORMATION

Example: CDL-LEY4SS12LQW. Accessories sold separately.


CDL-L	-	4	SS1				
Model#	ССТ	Body	Finish	Optic	Driver	Lens	Options
CDL-L	EW - 2700K EX - 3000K EY - 3500K EZ - 4000K	4 - Fully Recessed	SS1 - Stainless Steel Standard Grill	Steel 2 - 25° Integral Standard w/ 0-10V	T - Clear Tempered Glass Q - Clear Tempered Glass w/ Non-Skid	 0 - None W - Linear Spread H - Honeycomb Louver S - Solite Lens B - Special Lens 	
Model#	ССТ			Optic	Driver	Pattern	Note: Rubber Lens Holder PP600167 included w/ options
CDL-L	RW - 12W, RGBW + Tunable White (1650K-8000K) +DMX			1 - 18° 2 - 24°	C - 120-277VAC	G - Frosted Tempered	

Job Name/Date: Fixture Type Designation:



datasheet

FIXTURE DIMENSIONS

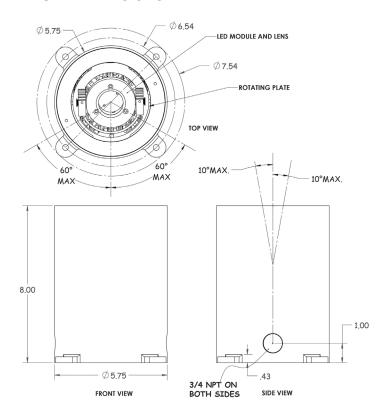

ACCESSORIES - Installation



PHOTOMETRIC DATA

Coming Soon

Job Name/Date: Fixture Type Designation:

2 of 2