


ELK is a sturdy, concrete LED fixture that comes as a bollard or wall mounted design, suitable for outdoor installation using an effective ground or wall fixing system. Elk Wall is the wall mounted version and comes in 3 color temperatures, a natural or anthracite concrete finish with double beam (up and down) emission.



TECHNICAL DATA

Wattage / Input	7W (350mA)
Power Supply	Remote not included - see page 2
Construction	Body: Portland Concrete with Fiberglass Fixing Base: Die Case Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U3-G0
CRI	>80
Delivered Lumens	908 lm (3000K)
Efficacy	129.7 lm/W
Optics	Diffuse (Sandblasted Glass)
Finishes	Natural or Anthracite Concrete
Lumen Maintenance	40,000 hrs (Ta 35°C)
Fixture Dimensions	8.99" l x 8.27" h x 3.15" depth
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

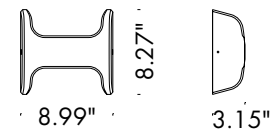

ORDERING INFORMATION

Example: F31501.B.3.05.US. Power Supplies ordered separately.

			05	.US
Model No.	Finish	CCT	Optics	
F31501 - Wall Version	A - Natural Concrete B - Anthracite Concrete	2 - 2700K 3 - 3000K 4 - 4000K	05 - Diffuse	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00211	Non-Dim	120VAC to 350mA, 10W, Class 2	1-1
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2
PPLT00214	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	2-4
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-8

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 209.5

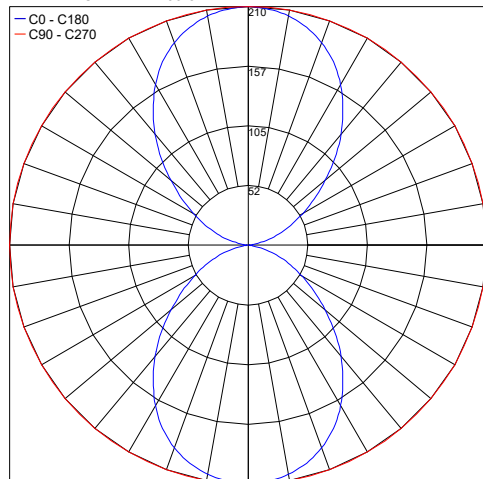

PHOTOMETRIC FILENAME : ELK WALL - 31501.X.3.05.IES

Job Name/Date:

Fixture Type Designation: