


ELK is a sturdy, concrete LED fixture that comes as a bollard or wall mounted design, suitable for outdoor installation using an effective ground or wall fixing system. Elk Wall is the wall mounted version and comes in 3 color temperatures, a natural or anthracite concrete finish with double beam (up and down) emission.



## TECHNICAL DATA

<b>Wattage / Input</b>	7W (350mA)
<b>Power Supply</b>	Remote not included - see page 2
<b>Construction</b>	Body: Portland Concrete with Fiberglass Fixing Base: Die Case Aluminum Lens: Extra Clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U3-G0
<b>CRI</b>	>80
<b>Delivered Lumens</b>	908 lm (3000K)
<b>Efficacy</b>	129.7 lm/W
<b>Optics</b>	Diffuse (Sandblasted Glass)
<b>Finishes</b>	Natural or Anthracite Concrete
<b>Lumen Maintenance</b>	40,000 hrs (Ta 35°C)
<b>Fixture Dimensions</b>	8.99" l x 8.27" h x 3.15" depth
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08

Fixture Dimensions

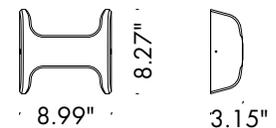

## ORDERING INFORMATION

Example: F31501.B.3.64.US. Power Supplies ordered separately.

			64	.US
Model No.	Finish	CCT	Optics	
F31501 - Wall Version	A - Natural Concrete B - Anthracite Concrete	2 - 2700K 3 - 3000K 4 - 4000K	64 - Monoemission	.US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00211</a>	Non-Dim	120VAC to 350mA, 10W, Class 2	1-1
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2
<a href="#">PPLT00214</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	2-4
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-8

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 209.5

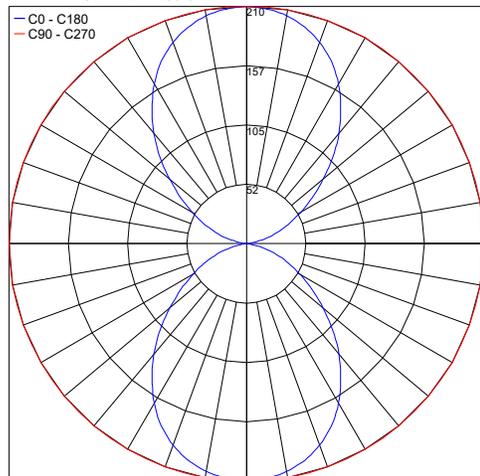

PHOTOMETRIC FILENAME : ELK WALL - 31501.X.3.05.IES

Job Name/Date:

Fixture Type Designation: