



G3 PRO SURFACE




designplan® 

DIMENSIONS

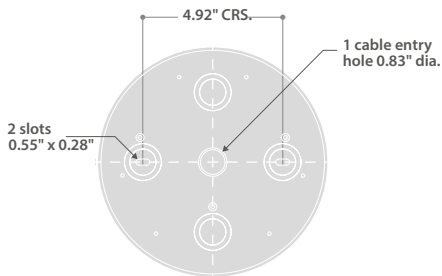


PHOTOMETRIC GUIDE

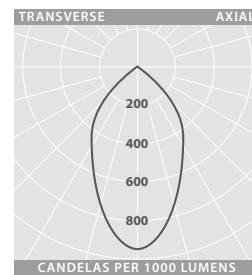


**BROAD DISTRIBUTION
WHITE OUTER REFLECTOR**

LED	3000K (lm)	4000K (lm)
11W	1580	1700
24W	3030	3260
40W	4545	4885

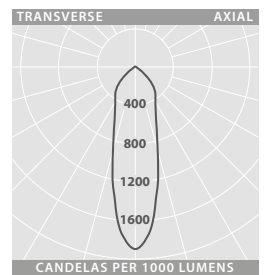


**NARROW DISTRIBUTION
WHITE OUTER REFLECTOR**

LED	3000K (lm)	4000K (lm)
40W	4515	4855

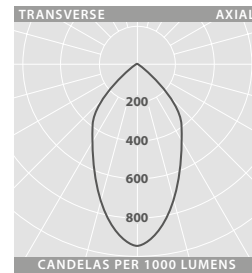

**BROAD DISTRIBUTION
BLACK OUTER REFLECTOR**

LED	3000K (lm)	4000K (lm)
11W	1570	1690
24W	3010	3235
40W	4485	4820

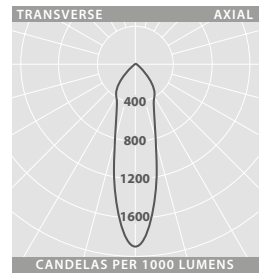

**NARROW DISTRIBUTION
BLACK OUTER REFLECTOR**

LED	3000K (lm)	4000K (lm)
40W	4420	4755



ENHANCED CIRCULAR SURFACE
DOWNLIGHTERS

IP40 LED

SPECIFICATION

- Spun aluminum body finished full polyester, non yellowing white (RAL9016)
- Tool free access and no visible fixings
- High performance vacuum metalized inner reflector with wide or narrow distribution options
- Choice of white or anti-glare black injection moulded flame-retardant outer reflector for dynamic appearance
- Excellent glare control at 50° and above
- CRI 90 LEDs with enhanced R9 value available to special order
- Fitted with 3000K/4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOR TEMPERATURE	3000K/4000K
RATED LIFE (HOURS)	50K - L70/B10
PROTECTION	-
DRIVER EFFICIENCY	>80%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	121.4

RANGE

	LED	3000K	4000K	APPROX. lbs	CIRCUIT
WHITE OUTER REFLECTOR	Broad distribution				
	11W	GT 19890	GT 19894	4.41 lbs	L/A
	24W	GT 19891	GT 19895	4.41 lbs	L/A
	40W	GT 19892	GT 19896	4.41 lbs	L/A
	Narrow distribution				
	40W	GT 19893	GT 19897	4.41 lbs	L/A
BLACK OUTER REFLECTOR	Broad distribution				
	11W	GT 19898	GT 19902	4.41 lbs	L/A
	24W	GT 19899	GT 19903	4.41 lbs	L/A
	40W	GT 19900	GT 19904	4.41 lbs	L/A
	Narrow distribution				
	40W	GT 19901	GT 19905	4.41 lbs	L/A

ACCESSORY

DESCRIPTION	CAT. No.	APPROX. lbs
Wire suspension kit (9.84' length)	GT 19906	0.11 lbs



Suspended version