


GORGET WALL 2


Gorget, designed by Karim Rashid, is a series of sleek, futuristic luminaires rooted in modular elements that come together to form the collection of three styles. Constellation is composed of interlocking rings that can be woven into captivating hanging sculptures, Linear is a system ideal for accentuating corridors and hallways, and Wall is a sconce to adorn surfaces. Gorget Wall 2 is the larger 22.5W wall version, and comes in a variety of original finishes to captivate attention.

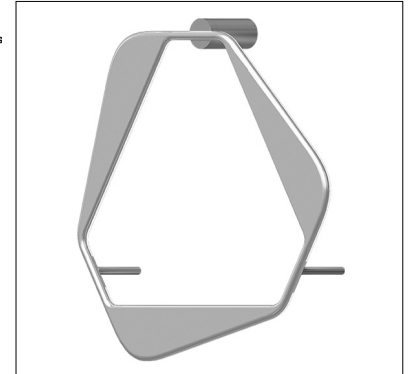

TECHNICAL DATA

Wattage / Input	22.5W (900mA)
Power Supply	Remote, not included. See page 2
Construction	Body: High Impact Polystyrene / PMMA Lens: Satin Diffuser
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	2900 lm (3000K)
Efficacy	128.9 lm/W (3000K)
Optics	Indirect
Lumen Maintenance	50,000 hrs L80, B10 (Ta 25°C)
Color Consistency	3-Step MacAdam
Finishes	14 Standard - see below and page 2 for chart
Fixture Dimensions	36.06" l x 34.33" h x 0.94" w
IP Rating	IP20

Fixture Dimensions



ORDERING INFORMATION


Example: IO5.4022.02L1.1.561.B0.US. Power Supplies sold separately.

IO5.4022.02L1	1			.US
Model No.	Dimming	CCT	Finish	
IO5.4022.02L1	1 - Remote	561 - 2700K 661 - 3000K 761 - 4000K	B0 - Classic Black W0 - Cream White T0 - Titan S0 - Silver D0 - Deep Green O0 - Ocean R0 - Royal Red I0 - Night H0 - Dark Honey E0 - White Gold L0 - Light Gold G0 - Gold C0 - Cooper P0 - Karim Pink	.US

Job Name/Date:

Fixture Type Designation:

FINISHES

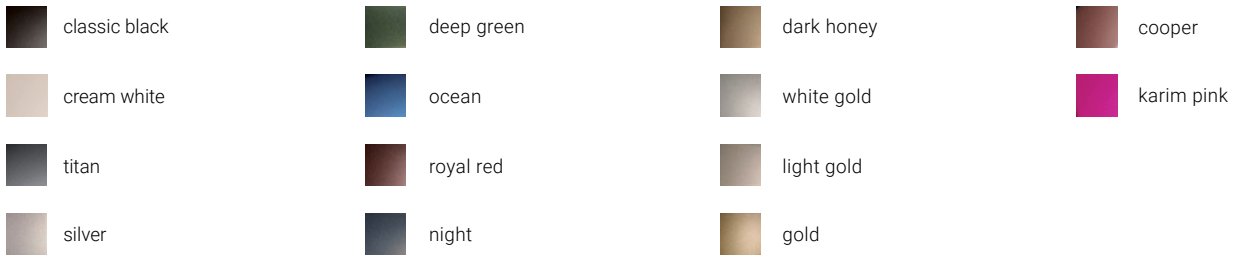

SUGGESTED POWER SUPPLIES

900mA


Part Number	Description	Input/Output	# of Fixtures
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 900mA, 50W, Class 2, DAMP	1-1

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 1057

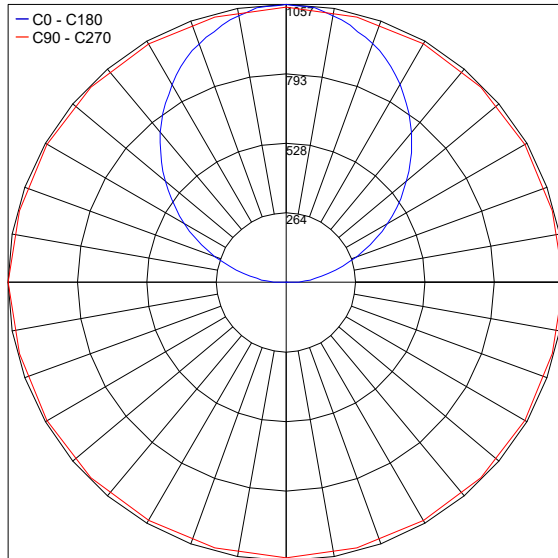

PHOTOMETRIC FILENAME : GORGET_WALL_2_3000K_37.0IN_REPAIRED.IES

Job Name/Date:

Fixture Type Designation: