

HANDLE is an outdoor lighting solution fashioned after the traditional form of innovation and safety, that can be used ceiling mounted, wall mounted, or as a bollard. With a rotatable 360° central element, it is a style statement, a tribute to design history, and a step into the future of outdoor lighting with precise control of the light output, both direct and indirect. It is offered in 3 sizes, 5 light beam options, and 5 standard finishes. Handle 300 is the 12.3" wide version (16.5" for bollard).



TECHNICAL DATA

Wattage	6W, 4W (diffuse)
Power Supply	Remote 350mA, not included. See page 2.
Construction	Body: Die-cast Aluminum, Extruded Aluminum Lens: Extra Clear Glass, Opal Glass (diffuse)
CCT	2700K, 3000K (2200K, RGBW on request)
BUG Rating	Coming Soon
CRI	>90
Delivered Lumens	610 lm (20°), 590 lm (30°), 535 lm (55°), 590 lm (20°x50°), 180 lm (Diffuse 120°) (3000K)
Efficacy	101 lm/W (20°), 98 lm/W (30°), 88 lm/W (55°), 98 lm/W (20°x50°), 45 lm/W (Diffuse 120°)
Optics	20°, 30°, 55°, 20°x50°, Diffuse 120°
Finishes	Black, Gray, Graphite, White, Oxide
Fixture Dimensions	Wall & Ceiling: 12.32" w x 4.76" h x 1.77" thick Bollard: 16.54" w x 9.84" h x 1.77" thick
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK08

WALL

CEILING

BOLLARD

ORDERING INFORMATION


Example: LNHD50POSMHB7ZL.US. Accessories / Power Supply ordered separately.

LNHD50POS			B7Z		US
Model No.	Optics	CCT		Finish	
LNHD50POS	S - Spot 20° M - Medium 30° W - Wide Flood 55° E - Elliptic 20°x50° D - Diffuse 120°	Y - 2700K H - 3000K	B7Z	G - Black H - Gray L - Graphite U - White V - Oxide	US

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

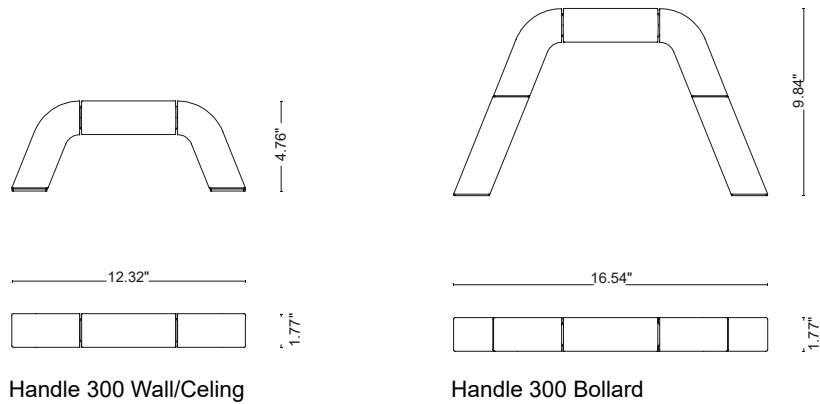

SUGGESTED POWER SUPPLIES
350mA

Part Number	Description	Input/Output	# of Fixtures	
			6W	4W Diffuse
PPLT00211	Non-Dim	120VAC to 350mA, 10W, Class 2	1-1	1-3
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-3	1-4
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-3	2-3
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-4	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						6W	4W
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-2	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-3	3-4

For other power supply options consult factory.

ACCESSORIES



00KHDSBL.250_
Bollard Kit - Height 9.84 in
G - Black
L - Graphite
H - Gray
V - Oxide
U - White

Order Separately for Bollard - Not Included

00KHD50SPU
Cable Covering Plate
White Finish

PHOTOMETRIC DATA
Coming Soon

Job Name/Date:

Fixture Type Designation: