



## DIMENSIONS

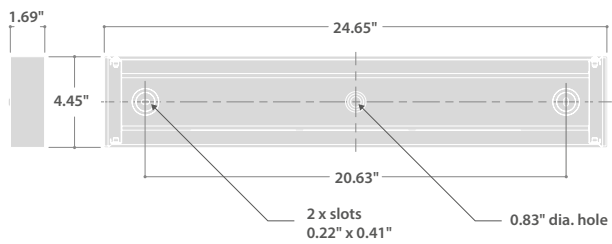

## PHOTOMETRIC GUIDE



Luminaire Lumen Output  
10W = 1455 lm  
20W = 2860 lm



WALL MOUNTED UP AND DOWNLIGHTERS



SPECIFICATION

- Steel body finished full polyester non-yellowing satin white (RAL 9016) or satin black
- Opal fire-retardant polycarbonate diffusers
- Can be mounted horizontally or vertically
- Fitted with 4000K LEDs

RANGE

LED	COLOR	CAT. No.	CIRCUIT	APPROX. lbs
10W	White	<b>KT 19990</b>	LF-Remote	4.41 lbs
20W	White	<b>KT 19991</b>	LF-Remote	4.41 lbs
10W	Black	<b>KT 19992</b>	LF-Remote	4.41 lbs
20W	Black	<b>KT 19993</b>	LF-Remote	4.41 lbs

e.g. **KT 19990SS**



LED CHARACTERISTICS

CRI	<b>80+</b>
COLOR TEMPERATURE	<b>4000K</b>
RATED LIFE (HOURS)	<b>67K - L80/B10</b>
PROTECTION	<b>LUX GUARD</b>
DRIVER EFFICIENCY	<b>&gt;80%</b>
REPLACEABLE	<b>YES</b>
POWER FACTOR	<b>&gt;0.95</b>

LL/CW **130.0**