

# VITRE 2.1

Vitre is a cylindrical linear profile which can be surface mounted with brackets, suitable for architectural facade lighting and high humidity environments. It is available in 3 different lengths with an integral power supply, and diffuse or elliptical optics. Vitre 2.1 is the 48.4" version.



## TECHNICAL DATA

<b>Wattage / Input</b>	36W (120-277VAC)
<b>Power Supply</b>	Integral (ON/OFF or Dimming)
<b>Construction</b>	End Caps: AISI 316L Stainless Steel Heat Sink: Internal Anticorodal Aluminum Lens: Transparent Polycarbonate
<b>CCT</b>	2200K, 2700K, 3000K, 4000K
<b>CRI</b>	80
<b>BUG Rating</b>	B2-U2-G1
<b>Delivered Lumens</b>	4010 lm (3000K, Diffuse)
<b>Efficacy</b>	111.4 lm/W (3000K, Diffuse)
<b>Optics</b>	36°x94°, Diffuse
<b>Finish</b>	Polycarbonate
<b>Fixture Dimensions</b>	Ø1.97" x 48.43"
<b>Fixture Weight</b>	6.61 lbs
<b>LED Source</b>	96 Mid-Power LEDs
<b>Lumen Maintenance</b>	80,000h L80 B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F - 113°F
<b>IP Rating</b>	IP65, IP67
<b>Impact Rating</b>	IK10

Fixture Dimensions



## ORDERING INFORMATION


Example: VT2110D00N0WP. Accessories ordered separately - some required.

VT2110				P
Model #	Control System	CCT	Optics	Finish
VT2110	0D - Dimming 00 - ON/OFF	00N - 2200K 00F - 2700K 005 - 3000K 009 - 4000K	0W - 36°x94° 0D - Diffuse	P - Polycarbonate


Job Name/Date:

Fixture Type Designation:


## ACCESSORIES - Installation



**WMA04**  
Clips Pair  
*Required, not included.*



**WMA05**  
Pair of temper-resistant clips  
*Required, not included.*



**WMA08**  
Mounting clips  
*for in/out connection*

## ACCESSORIES - Wiring Materials



**WFA0005**  
16.4 ft 4-pin interconnect cable  
*For DALI or 0/1-10V version*



**WFA0101**  
4.9 ft 4-pin interconnect cable  
*For DALI or 0/1-10V version*



**WFA01**  
4-pin male connector  
*For in/out connection IP68*




**WF07**  
4-pin female connector  
*IP66-IP68*

## PHOTOMETRIC DATA


*Note all Photometry is 3000K*

Maximum Candela = 1499.1

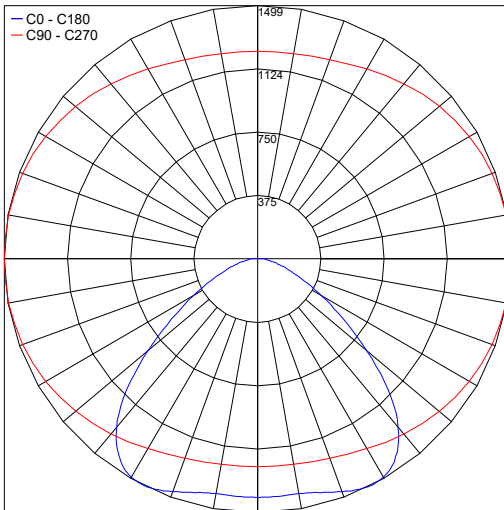

PHOTOMETRIC FILENAME : VITRE\_2.1\_D\_3000K\_36W.IES

Maximum Candela = 2620.3

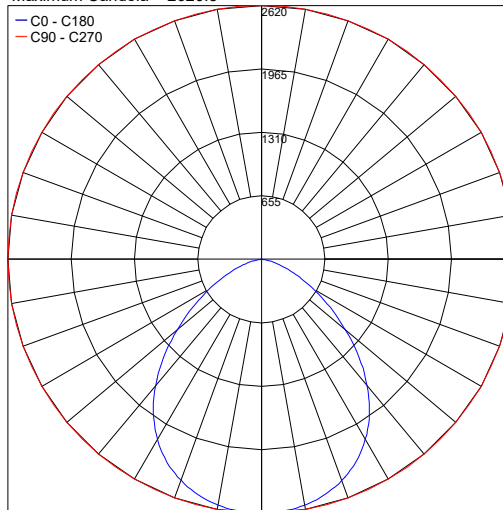

PHOTOMETRIC FILENAME : VITRE\_2.1\_W\_36X94\_3000K\_36W.IES

Job Name/Date:

Fixture Type Designation: