


Happy Feet is an outdoor LED fixture made of steel and aluminum that has a light source on the end of a curved stem making it perfectly suited for gardens or pathways. It is available in 2 color temperatures with 3 standard finishes.

TECHNICAL DATA

Wattage	3W
Power Supply	Remote 350mA not included, see page 2
Construction	Body: Steel Cylinder/Plate: Aluminum
CCT	2700K, 3000K
CRI	>80
Delivered Lumens	400 lm (2700K) 350 lm (3000K)
Efficacy	133.3 lm/W (2700K) 116.6 lm/W (3000K)
Optics	Medium
Finishes	Iron Painted, Corten Painted, Bronze Painted
LED Source	Modulo LED
Fixture Dimensions	17.72" x 7.87" x 21.26"
IP Rating	IP66



Fixture Dimensions

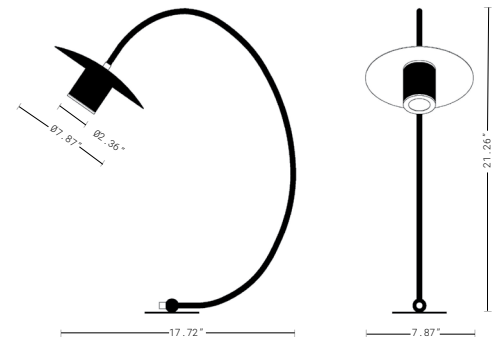

ORDERING INFORMATION

Example: R30.044.35.9.30.US. Power supplies ordered separately.

R30.044	35			US
Model No.	Power	Finish	CCT	
R30.044	35 - 350mA	7 - Iron Painted 9 - Corten Painted 12 - Bronze Painted	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00536	Non Dim	120-277VAC to 350mA, 4W, Class 2	1-1
PPLT00148	0-10V Dimming (to 1.0%)	120-277VAC to 350mA, 6W, Class 2	1-1
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
PPLT00263	Leading / Trailing Edge Dim to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-3
PPLT00561-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	4-4

For other power supply options consult factory.

PHOTOMETRIC DATA

*Coming Soon**Job Name/Date:**Fixture Type Designation:*