

KOS SURFACE WALL DIFFUSE

DOUBLE EMISSION


KOS is a family of versatile, small boxlike fixtures that comes as a recessed downlight, in-grade uplight, wall mounted, or floodlight for installation in outdoor environments. KOS Wall Double Diffuse is a surface mounted version with double beam (up and down) emission available with diffuse optics, 3 color temperatures and 3 standard finishes.



TECHNICAL DATA

Wattage	5W
Power Supply	Remote 500mA, not included. See page 2
Construction	Housing: Anticorodal Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B0-U3-G0 (3000K)
Delivered Lumens	248 lm (3000K)
Efficacy	49.6 lm/W (3000K)
Optics	Diffuse
Finishes	Anthracite, Pure White (RAL9010) ALU Gray (RAL9006)
Lumen Maintenance	90,000 hrs, L90 (Ta 35°C)
Fixture Dimensions	4.65" l x 3.27" w x 3.82" h
IP Rating	IP66, IP68 Fast Connection
Impact Resistance	IK08

Fixture Dimensions

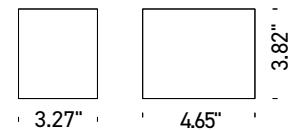

ORDERING INFORMATION

Example: F30530.1.2.05.US. Power Supplies ordered separately.

F30530			05	US
Model No.	Finish	CCT	Optics	
F30530	1 - Anthracite 2 - Pure White (RAL9010) 4 - ALU Gray (RAL9006)	2 - 2700K 3 - 3000K 4 - 4000K	05 - Diffuse	US

Job Name/Date:

Fixture Type Designation:

KOS SURFACE WALL DIFFUSE

DOUBLE EMISSION

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, DAMP	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-4


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00676	PEQ0E	PEQ0	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B	120-277VAC to 500mA, 20W, Class 2	1-1

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometry is 3000K

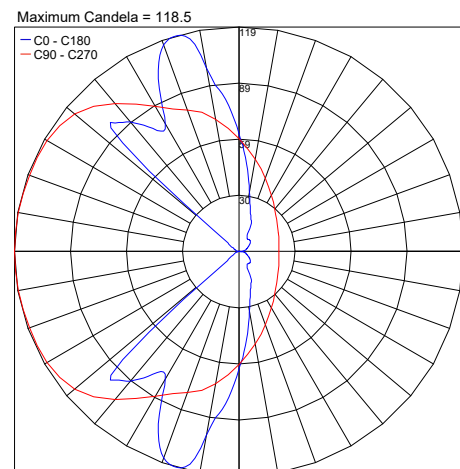

PHOTOMETRIC FILENAME : KOS SURFACE WALL DBLE DIFFUSE 30K - 30530.X.3.05.IES

Job Name/Date:

Fixture Type Designation: