

# KOS SURFACE WALL

## DOUBLE EMISSION


KOS is a family of versatile, small boxlike fixtures that come as a recessed downlight, in-grade uplight, surface mounted, or floodlight suitable for installation in outdoor environments. KOS Wall Double is a surface mounted version with double beam (up and down) emission, available in 3 color temperatures, 6 optics options and 3 standard finishes.



### TECHNICAL DATA

<b>Wattage</b>	20W (10W per beam)
<b>Power Supply</b>	Remote 1000mA, not included. See page 2
<b>Construction</b>	Housing: Anticorodal Aluminum Lens: Extra Clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B1-U4-G0 (All Optics - 3000K) B0-U3-G0 (Asym - 3000K)
<b>Delivered Lumens</b>	1710 lm (3000K, 10°)
<b>Efficacy</b>	85.5 lm/W (3000K, 10°)
<b>Optics</b>	10°, 25°, 20°x 115°, 115°x 20°, 65°, Asymmetrical
<b>Finishes</b>	Anthracite, Pure White (RAL9010) ALU Gray (RAL9006)
<b>Lumen Maintenance</b>	90,000 hrs, L90 (Ta 35°C)
<b>Fixture Dimensions</b>	4.65" l x 3.27" w x 9.13" h
<b>IP Rating</b>	IP66, IP68 Fast Connection
<b>Impact Resistance</b>	IK08

Fixture Dimensions



### ORDERING INFORMATION

Example: F30529.1.2.01.US. Power Supplies ordered separately.

F30529				US
Model No.	Finish	CCT	Optics	
F30529	1 - Anthracite 2 - Pure White (RAL9010) 4 - ALU Gray (RAL9006)	2 - 2700K 3 - 3000K 4 - 4000K	01 - Spot 10° 36 - Medium 25° 57 - Elliptical 20°x 115° 37 - Elliptical 115°x 20° 34 - Wide 65° 06 - Asymmetrical	US

Job Name/Date:

Fixture Type Designation:

# KOS SURFACE WALL

## DOUBLE EMISSION

### SUGGESTED POWER SUPPLIES

1000mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 1000mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 1000mA, 30W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 1000mA, 50W, Class 2, DAMP	1-2


### Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00519</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 1000mA, 38W, Class 2	1-1

For other power supply options consult factory.

### PHOTOMETRIC DATA

Note: All photometry is 3000K

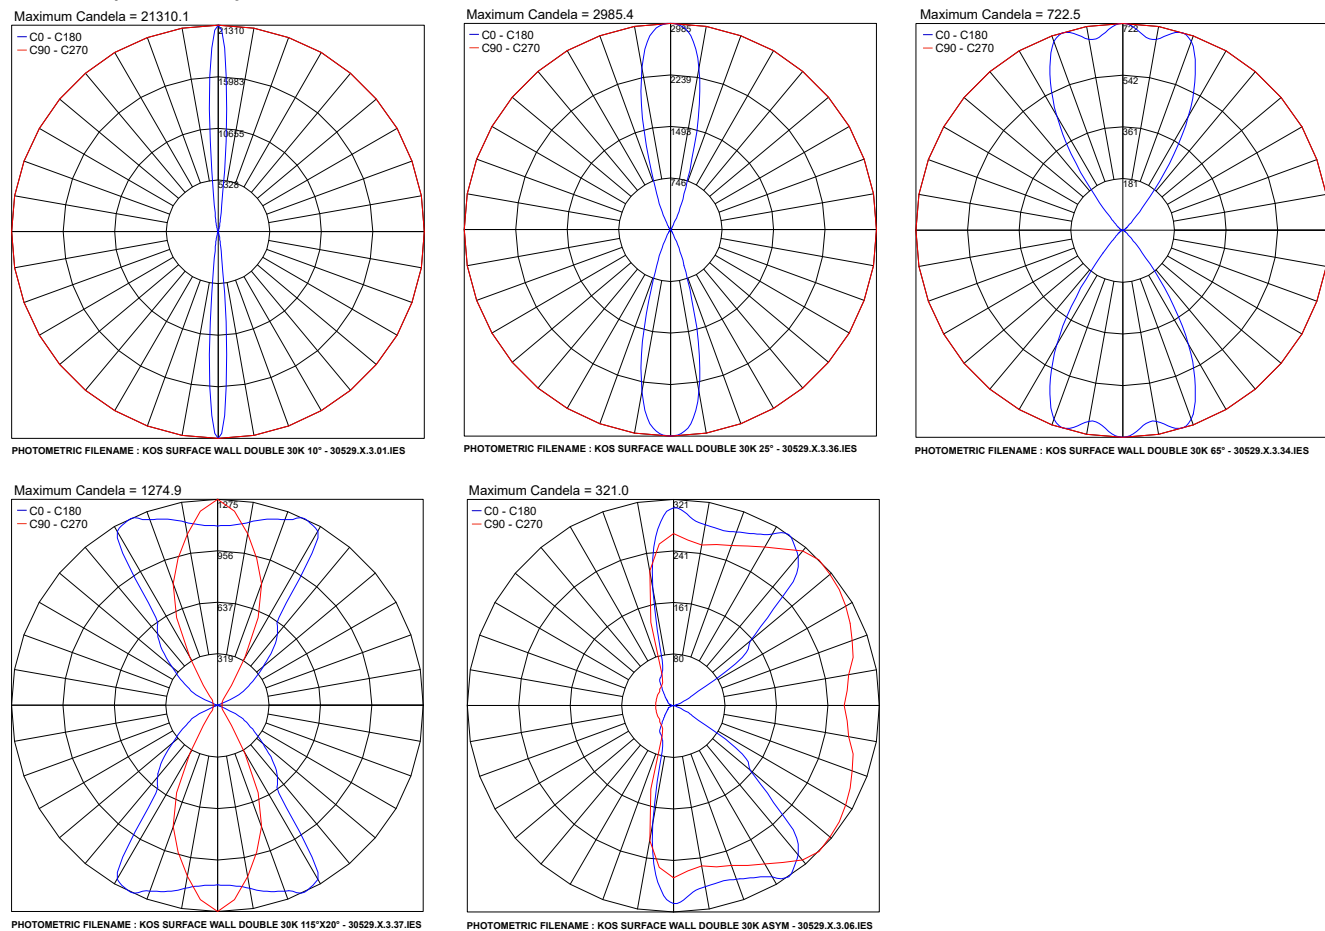

Job Name/Date:

Fixture Type Designation: