


KOS SURFACE WALL

SINGLE EMISSION


KOS is a family of versatile, small boxlike fixtures that come as a recessed downlight, in-grade uplight, surface mounted, or floodlight suitable for installation in outdoor environments. KOS Wall Single is a surface mounted version with single beam emission, available in 3 color temperatures, 6 optics options and 3 standard finishes.

TECHNICAL DATA

Wattage	10W
Power Supply	Remote 500mA, not included. See page 2
Construction	Housing: Anticorodal Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B1-U0-G0 (10°, 25°, 65° - 3000K) B1-U1-G0 (115°x20° - 3000K) B0-U0-G0 (Asym - 3000K)
Delivered Lumens	860 lm (3000K, 10°)
Efficacy	86 lm/W (3000K, 10°)
Optics	10°, 25°, 20°x 115°, 115°x 20°, 65°, Asymmetrical
Finishes	Anthracite, Pure White (RAL9010) ALU Gray (RAL9006)
Lumen Maintenance	90,000 hrs, L90 (Ta 35°C)
Fixture Dimensions	4.65" l x 3.27" w x 3.82" h
IP Rating	IP66, IP68 Fast Connection
Impact Resistance	IK08

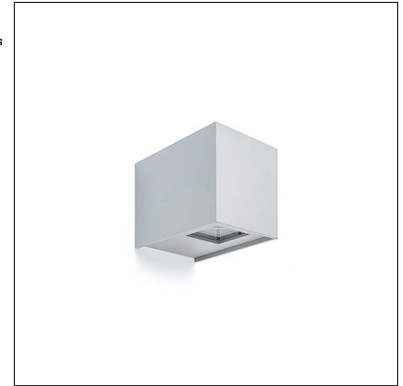

Fixture Dimensions



ORDERING INFORMATION

Example: F30528.1.2.01.US. Power Supplies ordered separately.

F30528				US
Model No.	Finish	CCT	Optics	
F30528	1 - Anthracite 2 - Pure White (RAL9010) 4 - ALU Gray (RAL9006)	2 - 2700K 3 - 3000K 4 - 4000K	01 - Spot 10° 36 - Medium 25° 57 - Elliptical 20°x 115° 37 - Elliptical 115°x 20° 34 - Wide 65° 06 - Asymmetrical	US

Job Name/Date:

Fixture Type Designation:

KOS SURFACE WALL

SINGLE EMISSION

SUGGESTED POWER SUPPLIES - 500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2, DAMP	1-1
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2, DAMP	1-1
PPLT00262	Leading / Trailing Edge Phase Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	2-3
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-4


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00676	PEQ0E	PEQ0	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B	120-277VAC to 500mA, 20W, Class 2	1-2


For other power supply options consult factory.

PHOTOMETRIC DATA


Note: All photometry is 3000K

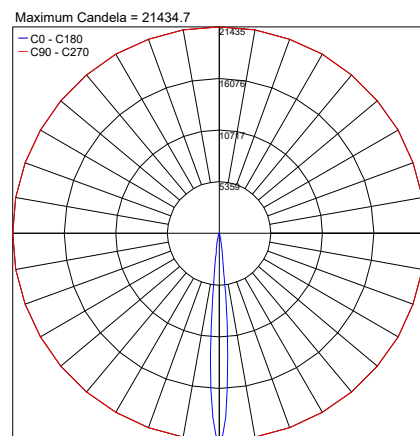


PHOTOMETRIC FILENAME : KOS WALL SINGLE 30K 10° - 30528.X.3.01.IES

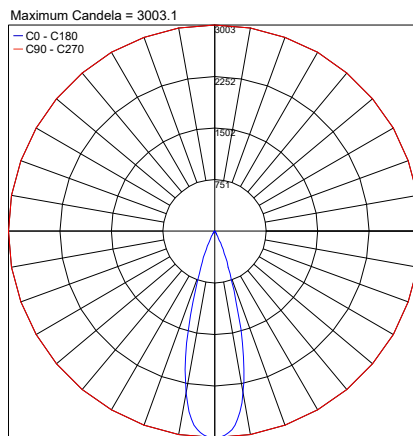


PHOTOMETRIC FILENAME : KOS WALL SINGLE 30K 25° - 30528.X.3.36.IES

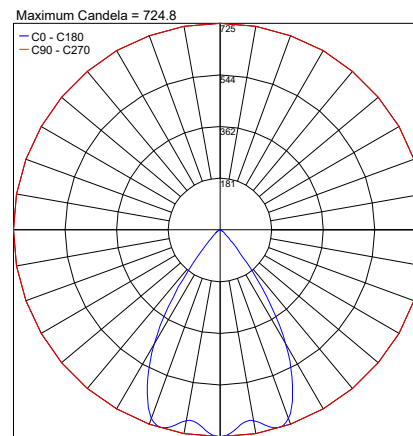

PHOTOMETRIC FILENAME : KOS WALL SINGLE 30K 65° - 30528.X.3.34.IES

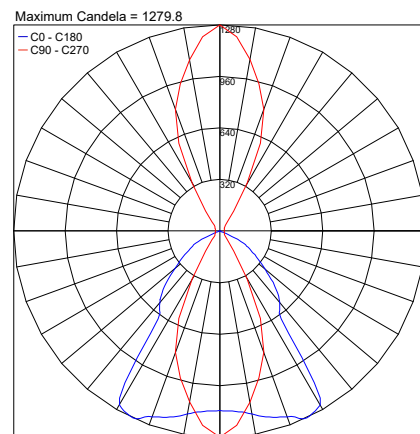

PHOTOMETRIC FILENAME : KOS WALL SINGLE 30K 115°X20° - 30528.X.3.37.IES

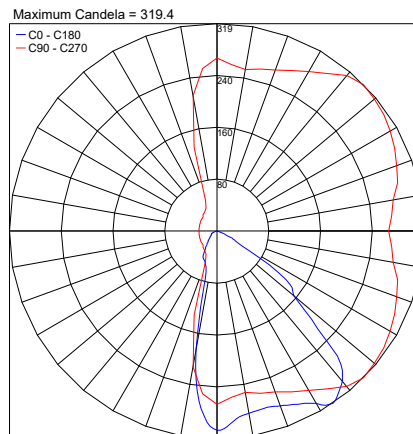

PHOTOMETRIC FILENAME : KOS WALL SINGLE 30K ASYM - 30528.X.3.06.IES

Job Name/Date:

Fixture Type Designation: