


Oliver is a family of outdoor floodlights with high performance and a pared-down design for lighting large facades, public spaces and areas. They are available in 3 sizes (Ø7.1", Ø9.1", Ø11.8") with a wide variety of white-light optics, including a very narrow 5° version, as well as an RGBW version which includes a narrow 10° beam. Oliver 3.0 is the Ø11.9" static white version.

TECHNICAL DATA

Wattage	95W (5° only), 110W
Power Supply	Integral 120-277VAC
Dimming	0-10V Dimming or DALI 2
Construction	Body: Anticorodal Aluminum Lens: 0.31"-Thick Tempered Extra-clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	80
BUG Rating	B4-U0-G0 (3000K - All Optics)
Delivered Lumens	7396 lm (3000K, 5°, 95W) 10139 lm (3000K, 10°, 110W)
Efficacy	77.9 lm/W (3000K, 5°, 95W) 92.2 lm/W (3000K, 10°, 110W)
Optics	7 Standard (see below)
Finishes	Anthracite, Corten, Gray, White, Custom RAL (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø11.85" x 18.90" x 5.39"
Fixture Weight	17.64 lbs
LED Source	23 Power LEDs
Lumen Maintenance	L80, B10 >60,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66
Impact Rating	IK09



Fixture Dimensions

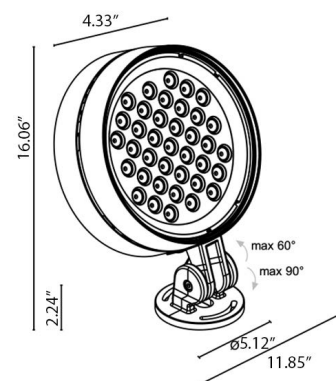

ORDERING INFORMATION

Example: LV30110100N0TH-1. Accessories ordered separately.


LV301							- 1
Model #	Wattage	Power/Dim	Optical Accessory	CCT	Optics	Finish	Cable Length
LV301	0 - 95W (5° only) 1 - 110W NOTE: 95W ONLY available in 5°. 110W NOT available in 5°	01 - 0-10V 0D - DALI-2	00 - No accessory 01 - Honeycomb Louver NOTE: Honeycomb Louver can be built-in NOT available on 5° or 10°x65° adjustable versions.	N - 2200K F - 2700K 5 - 3000K 9 - 4000K	0V - 5° (95W only) 0S - 10° 0M - 19° 0L - 30° 0K - 54° 0W - 12°x49° 0X - 10°x65° adj.	H - Anthracite T - Corten F - Gray E - White C - Custom RAL (Consult factory for "C")	1 - 16.40'

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-Glare

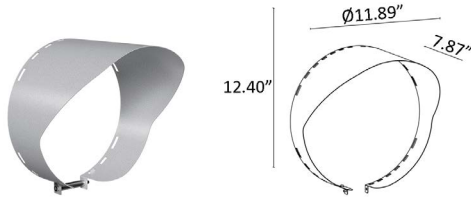

WBA21_


Asymmetrical Snoot

Choose one of the below finishes:

- E - White
- F - Gray
- H - Anthracite
- T - Cor-ten

ACCESSORIES

Installation




WPA14_

Flange for 3.0" Pole Installation - **Ø2.36"**

Choose one of the below finishes:

- E - White
- F - Gray
- H - Anthracite
- T - Cor-ten

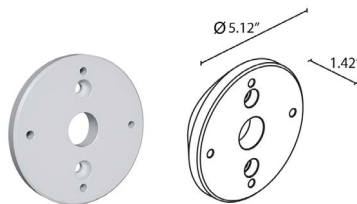


WPA15_

Flange for 4.0" Pole Installation - **Ø3.50"**

Choose one of the below finishes:

- E - White
- F - Gray
- H - Anthracite
- T - Cor-ten

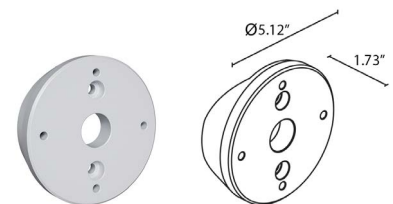

WPA16_

Flange for 5.0" Pole Installation - **Ø4.72"**

Choose one of the below finishes:

- E - White
- F - Gray
- H - Anthracite
- T - Cor-ten


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All Photometry is 3000K

Maximum Candela = 513105.5

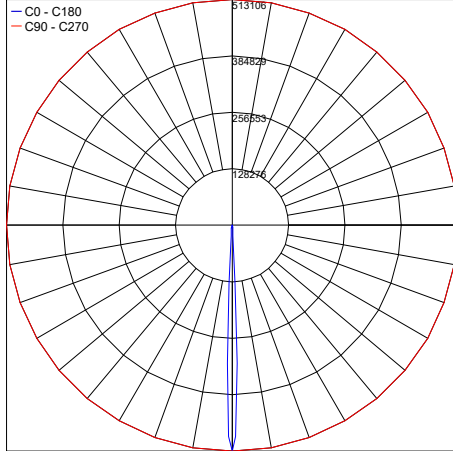


PHOTOMETRIC FILENAME : OLIVER_3.0_V_5_3000K_95W.IES

Maximum Candela = 250366.8

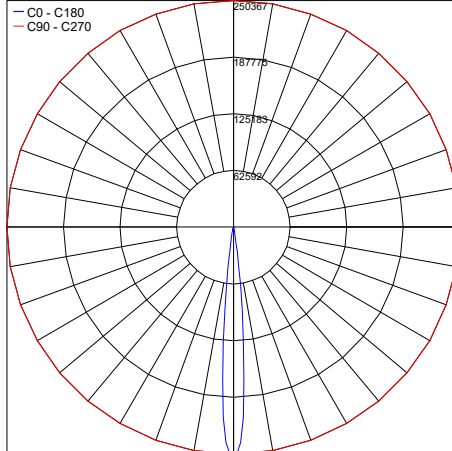


PHOTOMETRIC FILENAME : OLIVER_3.0_S_10_3000K_110W.IES

Maximum Candela = 48764

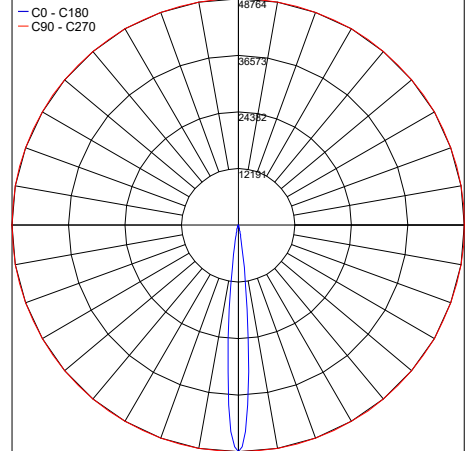


PHOTOMETRIC FILENAME : OLIVER_3.0_X_10X65_3000K_110W.IES

Maximum Candela = 41395.3

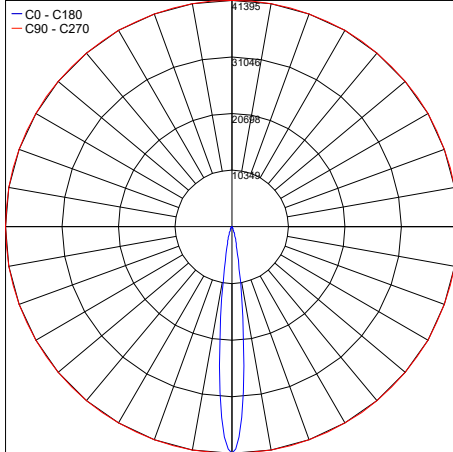


PHOTOMETRIC FILENAME : OLIVER_3.0_W_12X49_3000K_110W.IES

Maximum Candela = 77581.9

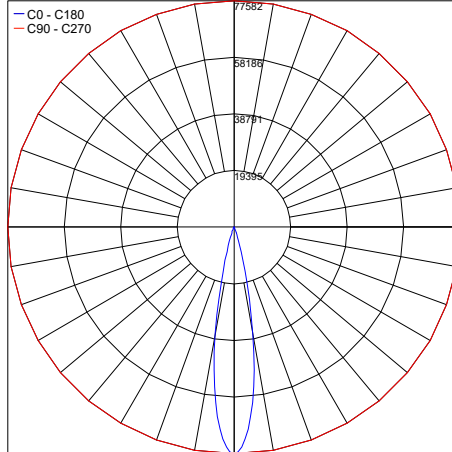


PHOTOMETRIC FILENAME : OLIVER_3.0_M_19_3000K_110W.IES

Maximum Candela = 36736.9

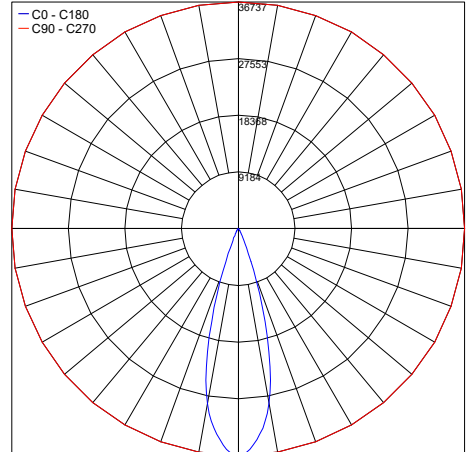

PHOTOMETRIC FILENAME : OLIVER_3.0_L_30_3000K_110W.IES

Maximum Candela = 13795.3

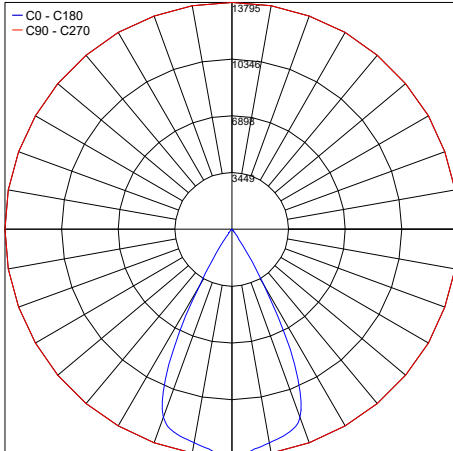

PHOTOMETRIC FILENAME : OLIVER_3.0_K_54_3000K_110W.IES

Job Name/Date:

Fixture Type Designation: