

C2-STT-D is an LED spotlight with a triple lens for installation on Multisystem EVO track. It is suitable for showcase lighting in museum and retail settings, with 360° rotatable, 90° swiveling, 5 color temperatures, 3 optics options and aluminum anodized in matte black or powder-coated in white RAL 9016.




TECHNICAL DATA

Wattage	9W
Power Supply	Remote 48VDC, not included. See page 2
Dimming	0-10V, DALI or Casambi
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>97
Delivered Lumens	630 lm (3000K, 25°)
Efficacy	70 lm/W (3000K, 25°)
Optics	13°, 25°, 42°
Finishes	Anodized Matte Black Powder-coated White RAL9016
Fixture Dimensions	Ø1.54" x 5.24" l (head) 6.54" l x 0.64" w x 0.71" h (base)
Lumen Maintenance	L80,B10 >50,000hrs
IP Rating	IP20

NOTE: Track to be ordered separately

Fixture Dimensions

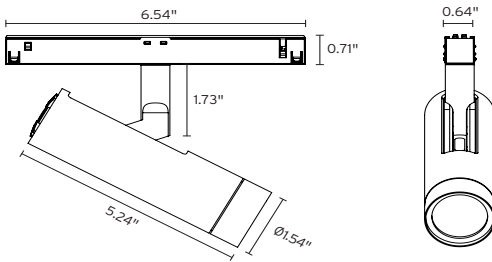

ORDERING INFORMATION

Example: C2-STT-D-0-40-2-SW. Accessories / Power Supplies ordered separately.

C2-STT-D	-		-		-		-	
Model No.	Dimming	CCT	Optics	Finish				
C2-STT-D (A400463)	0 - 0-10V D - DALI C - Casambi	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 57 - 5700K	T8 - 13° lens** T5 - 25° lens** T2 - 42° lens** ** LENS WITH LIGHT DIFFUSION FOIL, SEE ACCESSORIES PAGE	SW - Anodized Black W - White RAL9016				

Job Name/Date:

Fixture Type Designation:

ACCESSORIES




Honeycomb Grid
A000603



Anti-Glare Tube
A300171-__
SW - Black
W - White



Inclined Tube
A300172-__
SW - Black



Lens w/ Light Diffusion Foil
**A000530-S - 13°
**A000531-S - 25°
**A000532-S - 42°



Barn Door
A300148-__
SW - Black

SUGGESTED POWER SUPPLIES

48VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00574	Non-Dim	120-277VAC to 48VDC, 30W, Class 2	1-2
PPLT00575	Non-Dim	120-277VAC to 48VDC, 45W, Class 2	1-4
PPLT00576	Non-Dim	120-277VAC to 48VDC, 60W, Class 2	1-5
PPLT00577	Non-Dim	120-277VAC to 48VDC, 96W, Class 2	1-8


For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA - Triple Lens

for light color ~3000K | standard lens 25° | 1000mA | CRI typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

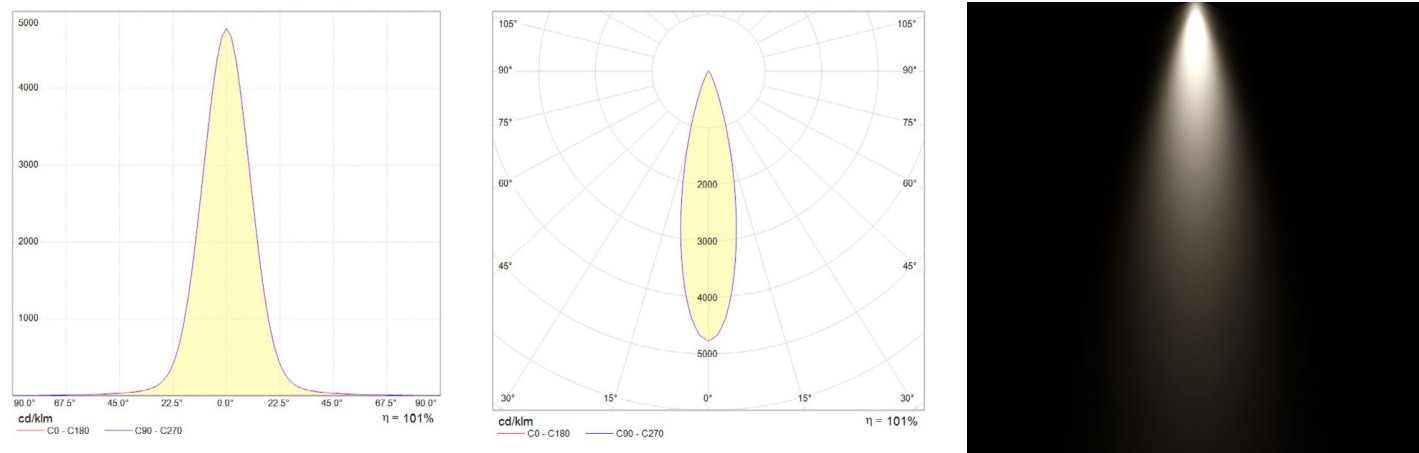

Maximum Candela = 3244.7

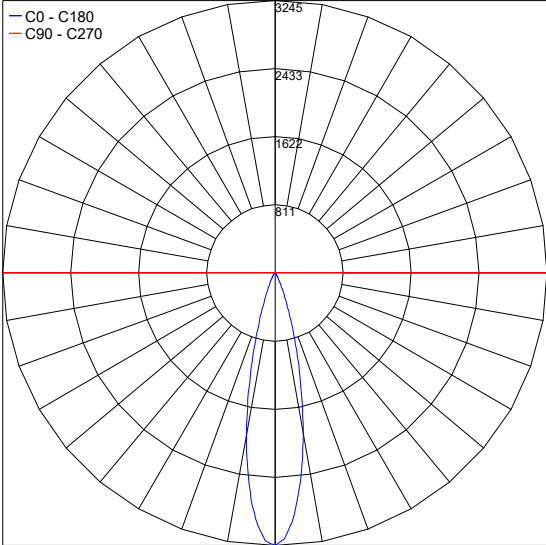

PHOTOMETRIC FILENAME : C2-STT (TRIPPLE LENS 25 DEGREE) 10W.IES

Job Name/Date:

Fixture Type Designation: