

GORGET CONSTELLATION 1


Gorget, designed by Karim Rashid, is a series of sleek, futuristic luminaires rooted in modular elements that come together to form the collection of three styles. Constellation is composed of interlocking rings that can be woven into captivating hanging sculptures, Linear is a system ideal for accentuating corridors and hallways, and Wall is a sconce to adorn surfaces. Gorget Constellation 1 is the smallest of 3 sizes of the suspended version. It is 34.8" x 28.6" with downlight only light in 3 color temperatures 14 standard finishes.



TECHNICAL DATA

Wattage / Input	30W (700mA)
Power Supply	Remote, not included. See page 2
Construction	Body: High Impact PMMA (Acrylic) Lens: Satin Diffuser
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	3870 lm (3000K)
Efficacy	129 lm/W (3000K)
Optics	Direct
Lumen Maintenance	50,000 hrs L80, B10 (Ta 25°C)
Color Consistency	3-Step MacAdam
Finishes	14 Standard - see below and chart on page 2
Fixture Dimensions	34.8" l x 28.6" w x 0.9" h
IP Rating	IP20

Fixture Dimensions

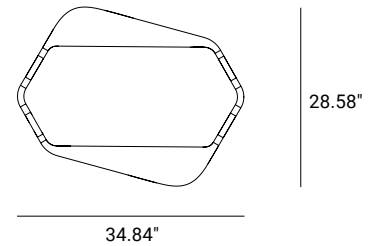

ORDERING INFORMATION

Example: IO5.4011.0111.1561.B0.US. Power Supplies ordered separately.

IO5.4011		1			.US	
Model No.	Suspension Length	Power	CCT	Finish		
IO5.4011	0111 - 59.05"	1 - Remote	561 - 2700K	B0 - Classic Black	I0 - Night	.US
	0131 - 118.11"		661 - 3000K	W0 - Cream White	H0 - Dark Honey	
			761 - 4000K	T0 - Titan	E0 - White Gold	
				S0 - Silver	L0 - Light Gold	
				D0 - Deep Green	G0 - Gold	
				O0 - Ocean	C0 - Cooper	
				R0 - Royal Red	P0 - Karim Pink	

Job Name/Date:

Fixture Type Designation:

FINISHES

	classic black		deep green		dark honey		cooper
	cream white		ocean		white gold		karim pink
	titan		royal red		light gold		
	silver		night		gold		

SUGGESTED POWER SUPPLIES

700mA - 30W

Part Number	Description	Input/Output	# of Fixtures
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 30W, Class 2, DAMP	1-1
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2, DAMP	1-1


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00181	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 38W, Class 2	1-1

For other power supply options consult factory.


PHOTOMETRIC DATA

Maximum Candela = 1342.1

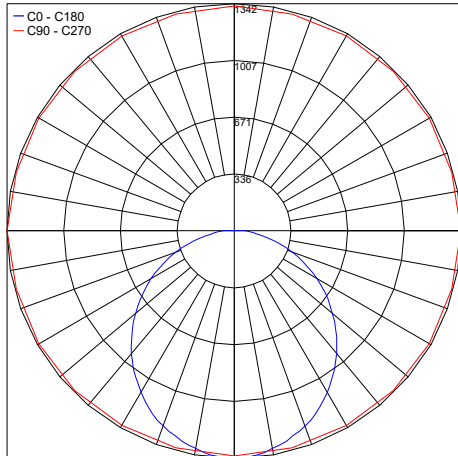


PHOTOMETRIC FILENAME : GORGET_CONSTELLATION_1_2700K_SATINE_CC_HE_885MM.IES

Maximum Candela = 1409.1

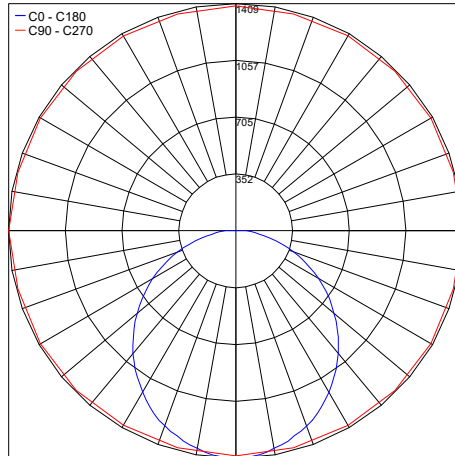

PHOTOMETRIC FILENAME : GORGET_CONSTELLATION_1_3000K_SATINE_CC_HE_885MM.IES

Maximum Candela = 1479.7

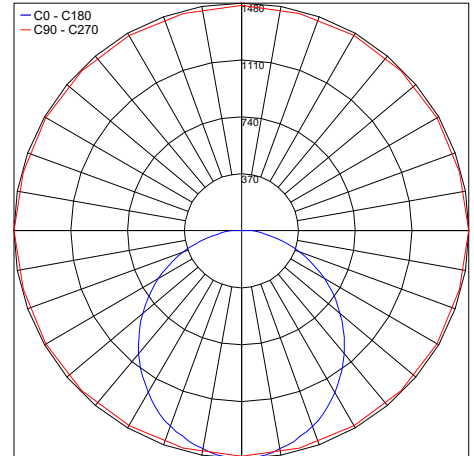

PHOTOMETRIC FILENAME : GORGET_CONSTELLATION_1_4000K_SATINE_CC_HE_885MM.IES

Job Name/Date:

Fixture Type Designation: