


GORGET CONSTELLATION 2


Gorget, designed by Karim Rashid, is a series of sleek, futuristic luminaires rooted in modular elements that come together to form the collection of three styles. Constellation is composed of interlocking rings that can be woven into captivating hanging sculptures, Linear is a system ideal for accentuating corridors and hallways, and Wall is a sconce to adorn surfaces. Gorget Constellation 2 is the middle of 3 sizes of the suspended version. It is 37.0" x 35.4" with downlight only light in 3 color temperatures 14 standard finishes.

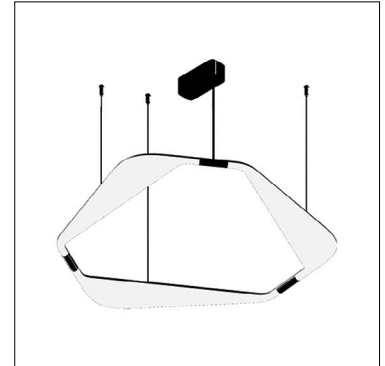

TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 45W (1050mA) |
| Power Supply | Remote, not included. See page 2 |
| Construction | Body: High Impact PMMA (Acrylic) Lens: Satin Diffuser |
| CCT | 2700K, 3000K, 4000K |
| CRI | >90 |
| Delivered Lumens | 5805 lm (3000K) |
| Efficacy | 129 lm/W (3000K) |
| Optics | Direct |
| Lumen Maintenance | 50,000 hrs L80, B10 (Ta 25°C) |
| Color Consistency | 3-Step MacAdam |
| Finishes | 14 Standard - see below and chart on page 2 |
| Fixture Dimensions | 37.0" l x 35.4" w x 0.9" h |
| IP Rating | IP20 |

Fixture Dimensions

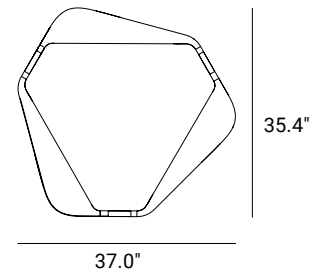

ORDERING INFORMATION


Example: IO5.4012.0211.1561.B0.US. Power Supplies ordered separately.

| IO5.4012 | | 1 | | | | .US |
|-----------|---------------------------------|------------|---|--|--|-----|
| Model No. | Suspension Length | Power | CCT | Finish | | |
| IO5.4012 | 0211 - 59.05" 0231 - 118.11" | 1 - Remote | 561 - 2700K 661 - 3000K 761 - 4000K | B0 - Classic Black W0 - Cream White T0 - Titan S0 - Silver D0 - Deep Green O0 - Ocean R0 - Royal Red | I0 - Night H0 - Dark Honey E0 - White Gold L0 - Light Gold G0 - Gold C0 - Cooper P0 - Karim Pink | .US |

Job Name/Date:

Fixture Type Designation:

FINISHES

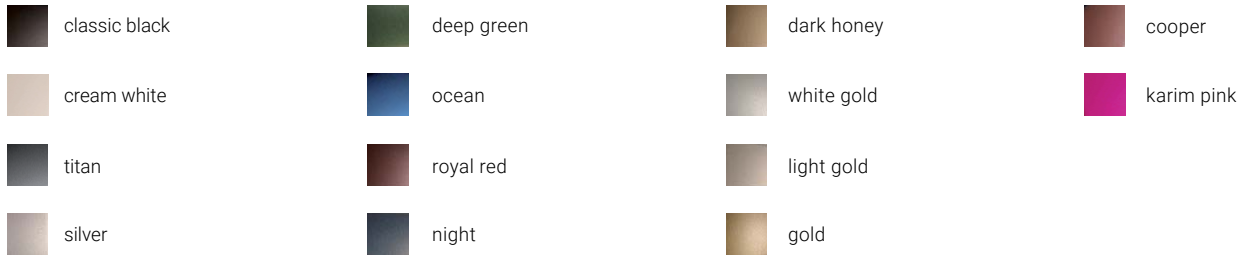


SUGGESTED POWER SUPPLIES

1050mA - 40W

| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|-----------------------|---|---------------|
| PPLT00467-P | 0-10V Dimming to 1.0% | 120-277VAC to 1050mA, 50W, Class 2, DAMP | 1-1 |
| PPLT00558-P | 0-10V Dimming to 0.1% | 120-277VAC to 1050mA, 68W, Class 2, DAMP | 1-1 |
| PPLT00679 | 0-10V Dimming to 10% | 120-277VAC to 1050mA, 100W, Class 2, DAMP | 2-2 |

For other power supply options consult factory.

PHOTOMETRIC DATA

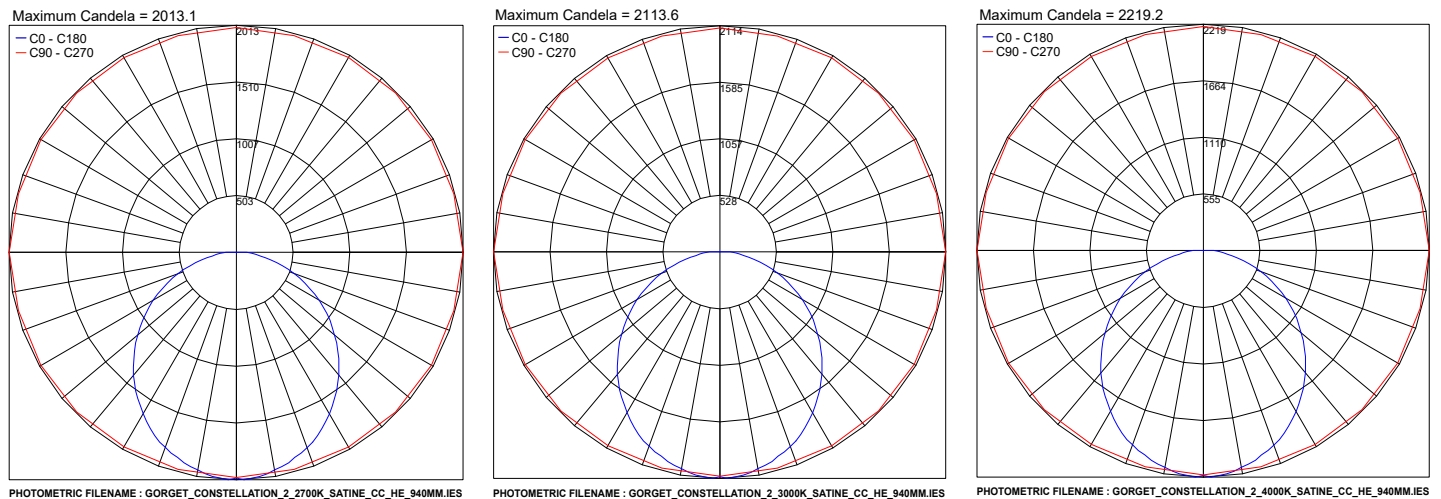

Job Name/Date:

Fixture Type Designation: