


Kone is a collection of luminaires that have a sleek design in glass and metal, suitable for indoor installation in a variety of settings. Kone 1 One is a single suspended version that has a 19.5W down spotlight with 3W up accent light. It can be used on its own or grouped in suspended configurations. The PVD-coated glass and high-quality coating ensures durability and a lasting shine, while the wide range of powder coat finishes add depth and elegance.



TECHNICAL DATA

Wattage	19.5W Down, 2W Up Accent
Power Supply	Remote 500mA, not included. See page 2
Construction	Body: Aluminum, Glass
CCT	2700K, 3000K, 4000K Accent: Amber, Blue, Warm White
CRI	>90
Delivered Lumens	2061 lm Down (3000K) 120 lm Up Accent (All Colors)
Efficacy	105.7 lm/W Down (3000K) 40 lm/W Up Accent (All Colors)
Optics	Adjustable Beam 30°-55°
LED Source	CC High Efficacy LED
Lumen Maintenance	50,000 hrs L80, B10 (Ta 25°C)
Color Consistency	3-Step MacAdam
Finishes	16 Standard, see below
Fixture Dimensions	Ø6.50" x 12.32" Suspension Length: 59.06"
IP Rating	IP20

Fixture Dimensions

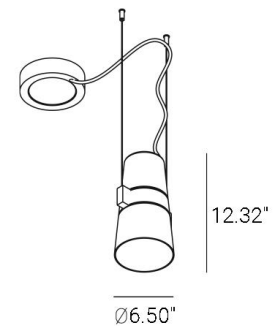

ORDERING INFORMATION

Example: **IO7.3103.0371.1R6A.40.US**. Power Supplies ordered separately.

IO7.3103	0371				.US	
Model #	Light Distribution	Dimming	LED Color	Color		
IO7.3103	0371 - Suspended Direct/Indirect Standard Ceiling Cup L - 59.06"	1 - Remote 2 - DALI C - Casambi 4 - Touch Dim	R6A - 2700K + Warm White E6A - 3000K + Warm White H6A - 4000K + Warm White C6A - 2700K + Amber F6A - 3000K + Amber I6A - 4000K + Amber D6A - 2700K + Blue G6A - 3000K + Blue J6A - 4000K + Blue	40 - White V0 - Volcano 50 - Black W0 - Wine M0 - Maron E0 - Earth S0 - Sapphire A0 - Sage	O0 - Ochra F0 - Forrest C0 - Cloudy H0 - Graphite D0 - Sandy N0 - Night G0 - Fog B0 - Black Dust	.US

Job Name/Date:

Fixture Type Designation:

FINISHES

Basic	Standard	Premium (Metalic)	Glass
white (RAL9016)	sapphire (RAL 5003)	sandy	clear (PVD coated)
fog (RAL7038)	forrest (RAL 6005)	sage	frosted
graphite (RAL7024)	wine (RAL 3005)	earth	
black (RAL9005)	ochra (RAL 8001)	cloudy	
		marrone	
		volcano	
		night	
		black dust	

SUGGESTED POWER SUPPLIES

500mA - 21.5W


Part Number	Description	Input/Output	# of Fixtures
PPLT00527	Phase Dim (120V only)	120VAC to 500mA, 20W, Class 2, IP66	1-1
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-1
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-1
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 3951.5

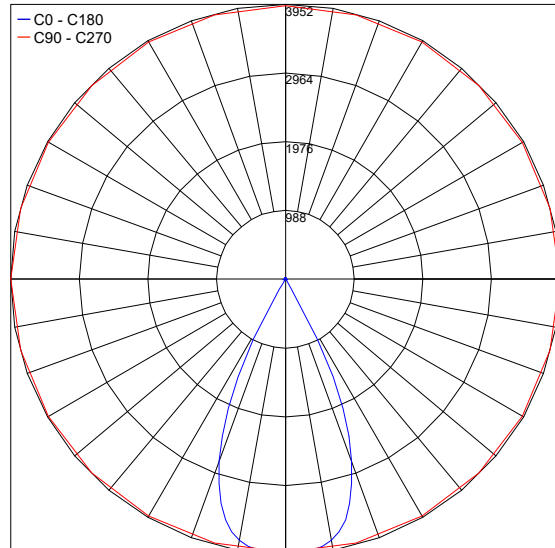

PHOTOMETRIC FILENAME : KONE SINGLE ONE ADJUSTABLE BEAM 3000K.IES

Job Name/Date:

Fixture Type Designation: