

# KONE 1 WALL


Kone is a collection of luminaires that have a sleek design in glass and metal, suitable for indoor installation in a variety of settings. Kone 1 Wall is a single wall mounted version with a 19.5W down light and 3W up accent light. The PVD-coated glass and high-quality coating ensures durability and a lasting shine, while the wide range of powder coat finishes add depth and elegance.



## TECHNICAL DATA

<b>Wattage</b>	19.5W Down, 3W Up Accent
<b>Power Supply</b>	Remote 500mA, not included. See page 2
<b>Construction</b>	Body: Aluminum, Glass
<b>CCT</b>	2700K, 3000K, 4000K Accent: Amber, Blue, Warm White
<b>CRI</b>	>90
<b>Delivered Lumens</b>	2061 lm Down (3000K) 120 lm Up Accent (3000K)
<b>Efficacy</b>	105.7 lm/W Down 40 lm/W Up Accent (3000K)
<b>Optics</b>	Adjustable Beam 30°-55°
<b>LED Source</b>	CC High Efficacy LED
<b>Lumen Maintenance</b>	50,000 hrs L80, B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Finishes</b>	16 Standard, see below
<b>Fixture Dimensions</b>	Ø9.29" x 12.32"
<b>IP Rating</b>	IP20

Fixture Dimensions



## ORDERING INFORMATION

Example: IO7.3102.02M1.1R6A.40.US. Power Supplies ordered separately.

IO7.3102	02M1				.US	
Model No.	Light Distribution	Dimming	LED Color	Color		
IO7.3102	02M1 - Wall, Direct/Indirect	<ul style="list-style-type: none"> <li>1 - Remote</li> <li>2 - DALI</li> <li>C - Casambi</li> <li>4 - Touch Dim</li> </ul>	<ul style="list-style-type: none"> <li>R6A - 2700K + Warm White</li> <li>E6A - 3000K + Warm White</li> <li>H6A - 4000K + Warm White</li> <li>C6A - 2700K + Amber</li> <li>F6A - 3000K + Amber</li> <li>I6A - 4000K + Amber</li> <li>D6A - 2700K + Blue</li> <li>G6A - 3000K + Blue</li> <li>J6A - 4000K + Blue</li> </ul>	<ul style="list-style-type: none"> <li>40 - White</li> <li>V0 - Volcano</li> <li>50 - Black</li> <li>W0 - Wine</li> <li>M0 - Maron</li> <li>E0 - Earth</li> <li>S0 - Sapphire</li> <li>A0 - Sage</li> </ul>	<ul style="list-style-type: none"> <li>O0 - Ochra</li> <li>F0 - Forrest</li> <li>C0 - Cloudy</li> <li>H0 - Graphite</li> <li>D0 - Sandy</li> <li>N0 - Night</li> <li>G0 - Fog</li> <li>B0 - Black Dust</li> </ul>	.US

Job Name/Date:

Fixture Type Designation:

## FINISHES

<b>Basic</b>	<b>Standard</b>	<b>Premium (Metalic)</b>	<b>Glass</b>
white (RAL9016)	sapphire (RAL 5003)	sandy	clear (PVD coated)
fog (RAL7038)	forrest (RAL 6005)	sage	frosted
graphite (RAL7024)	wine (RAL 3005)	earth	
black (RAL9005)	ochra (RAL 8001)	cloudy	
		marrone	
		volcano	
		night	
		black dust	

## SUGGESTED POWER SUPPLIES

500mA - 22.5W


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00527</a>	Phase Dim (120V only)	120VAC to 500mA, 20W, Class 2, IP66	1-1
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-1
<a href="#">PPLT00262</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-4

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 3951.5

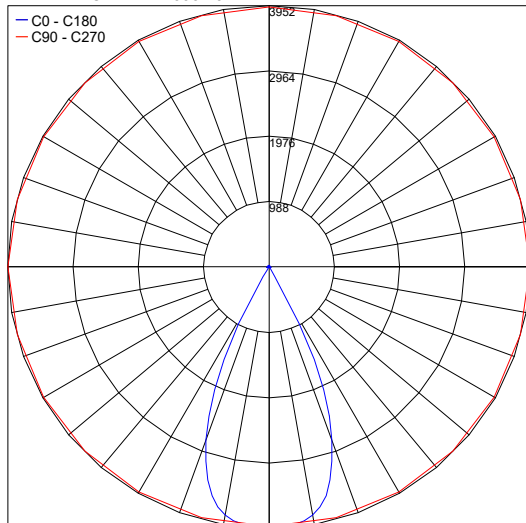

PHOTOMETRIC FILENAME : KONE SINGLE WALL ADJ. BEAM 3000K.IES

Job Name/Date:

Fixture Type Designation: