

KONE 2 WALL


Kone is a collection of luminaires that have a sleek design in glass and metal, suitable for indoor installation in a variety of settings. Kone 2 Wall is a double wall mounted version that has a 24.6W down spotlight. The PVD-coated glass and high-quality coating ensures durability and a lasting shine, while the wide range of powder coat finishes add depth and elegance.



TECHNICAL DATA

| | |
|---------------------------|----------------------------------------|
| Wattage / Input | 24.6W (500mA - Clear, 700mA - Frosted) |
| Power Supply | Remote, not included. See page 2 |
| Construction | Body: Aluminum, Glass |
| CCT | 2700K, 3000K, 4000K |
| CRI | >90 |
| Delivered Lumens | 1400 lm (3000K) |
| Efficacy | 56.9 lm/W |
| Optics | Clear Glass, Frosted Glass |
| LED Source | CC High Efficacy LED |
| Lumen Maintenance | 50,000 hrs L80, B10 (Ta 25°C) |
| Color Consistency | 3-Step MacAdam |
| Finishes | 16 Standard, see below |
| Fixture Dimensions | 33.78" l x 10.04" w |
| IP Rating | IP20 |

Fixture Dimensions

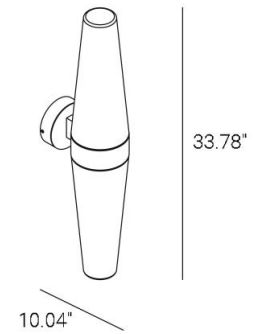

ORDERING INFORMATION

Example: IO7.3111.12M1.156C.40.US. Power Supplies ordered separately.

| IO7.3111 | 12M1 | | | | | | .US |
|----------|------------------------------|--------------------------------------------------------|----------------------------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-----|
| Model # | Light Distribution | Dimming | CCT | Optic | Color | | |
| IO7.3111 | 12M1 - Wall, Direct/Indirect | 1 - Remote 2 - DALI C - Casambi 4 - Touch Dim | 56 - 2700K 66 - 3000K 76 - 4000K | C - Clear Glass G - Frosted Glass | 40 - White V0 - Volcano 50 - Black W0 - Wine M0 - Maron E0 - Earth S0 - Sapphire A0 - Sage | O0 - Ochra F0 - Forrest C0 - Cloudy H0 - Graphite D0 - Sandy N0 - Night G0 - Fog B0 - Black Dust | .US |


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 146.7

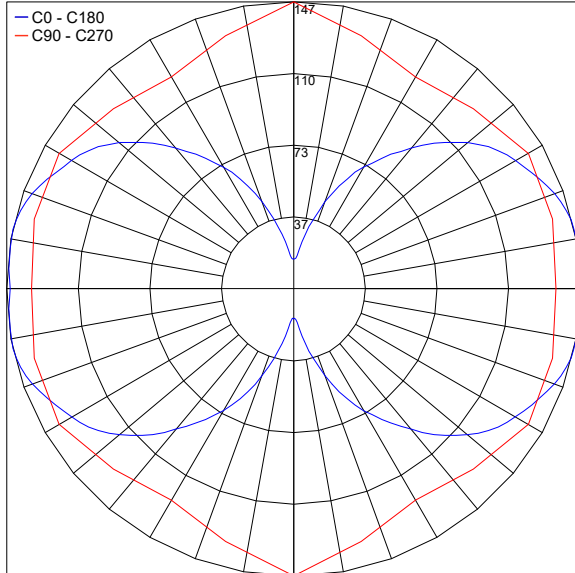

PHOTOMETRIC FILENAME : KONE DOUBLE WALL CLEAR GLASS 3000K.IES

Job Name/Date:

Fixture Type Designation: