

Kone

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

Organic
LIGHTING

Kone

Design excellence

The Kone collection embodies the geometric essence of its name, manifesting in sleek designs crafted from glass and metal. The Kone collection offers two distinct variations, each characterized by unique shapes and lighting sources. Kone 1 showcases a combination of lenses and light rings, delivering both focused spotlighting and a subtle, upward and downward glow. On the other hand, Kone 2 boasts LEDs encased in glass, emitting a soothing ambient light. With its diverse range of fixtures, the Kone collection empowers you to effortlessly integrate lighting solutions into a myriad of spaces and applications.


Variants: kone 1, kone 2
Installations: ceiling built-on, suspended, wall, table
Diffusers: PVD glass, lens



Decorative

Kone



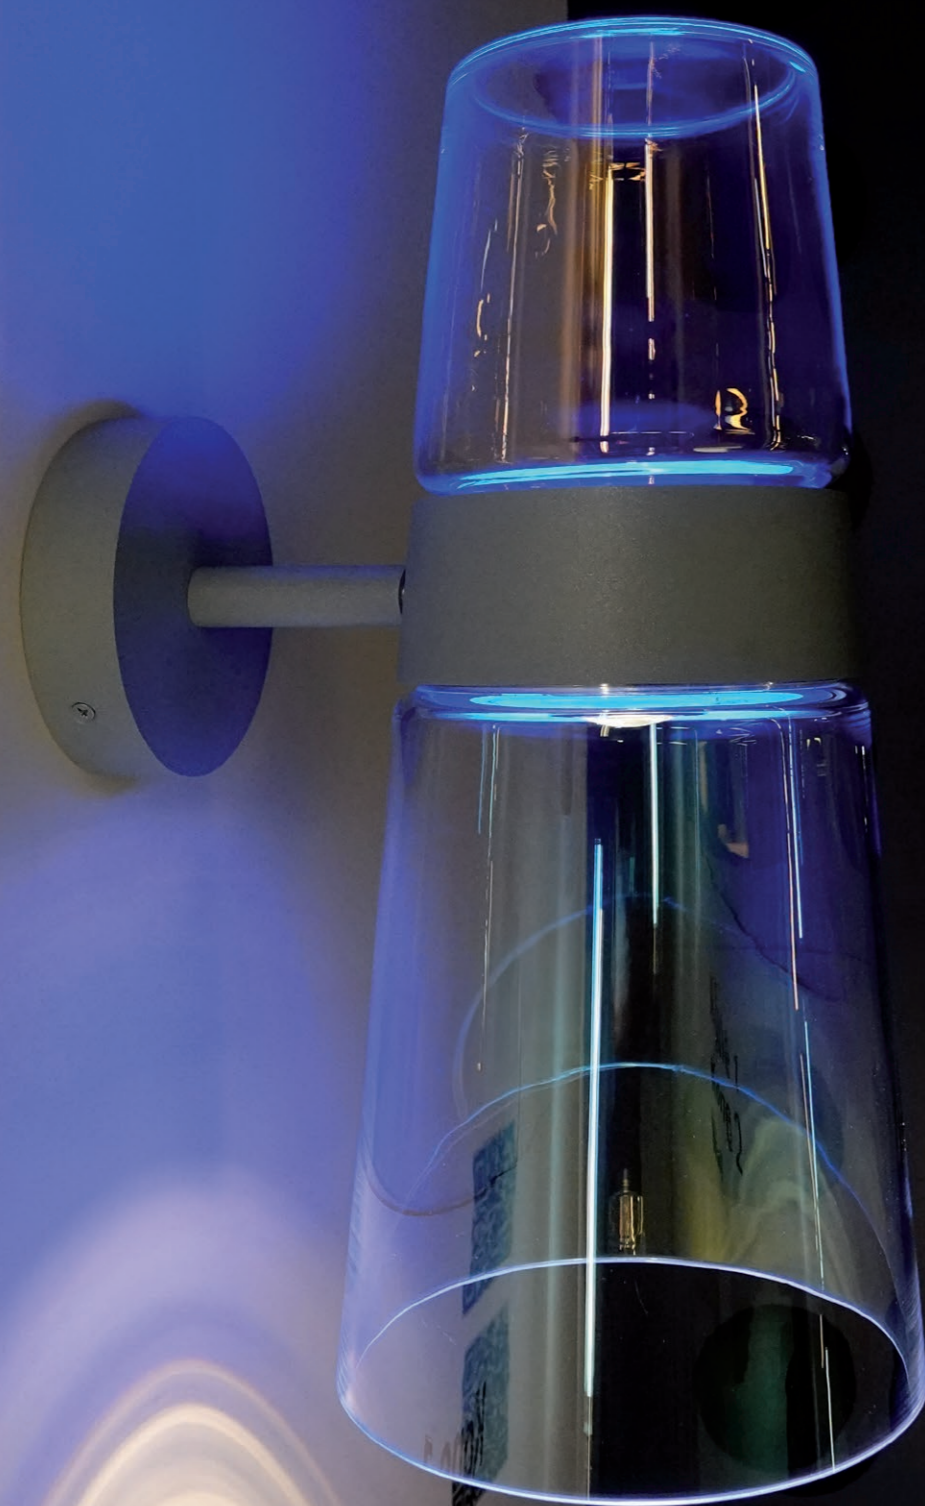


Kone

Subtle Accents

The Kone Wall series presents a versatile choice with two distinct options, catering to varying lighting needs: ambient or spotlight. This flexibility allows you to utilize the fixture for either broad, general illumination across all directions or to create focal points and subtle decorative accents with spotlighting. Ideal for living rooms, open spaces, and narrow corridors, both in residential and commercial settings, these wall sconces offer practical yet stylish lighting solutions.



Timeless materials were combined with great colors and finishes. Our extensive color palette of powder-coated metals ensures a perfect match for any aesthetic, while our glass undergoes a sophisticated physical vapor deposition process to achieve its rich, enduring coloration. It's a mix of the past and future, a combination of high technology and traditional craftsmanship.

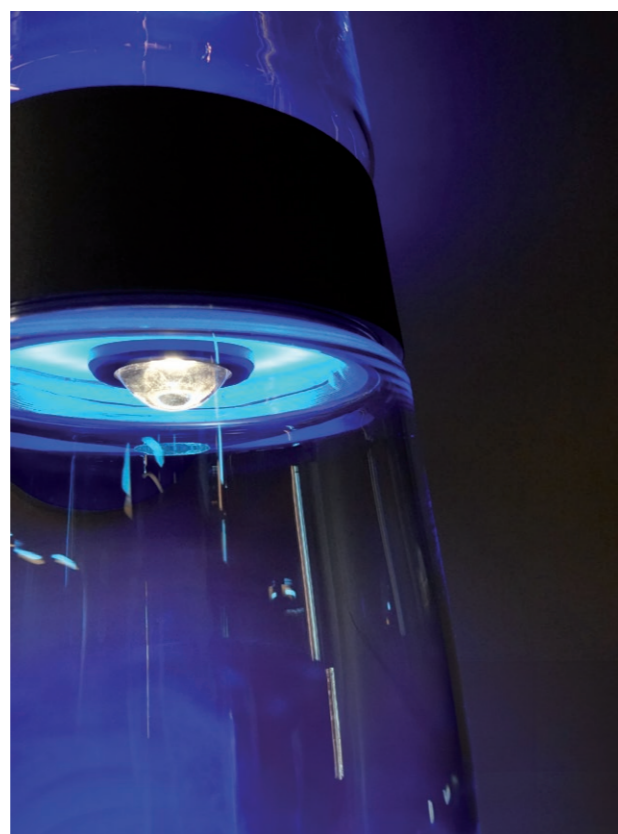

Combining two types of lighting in one collection enables you to shape space with precision, infusing each area with its own distinctive ambiance. Whether through soft ambient light or focused spotlights with delicate hues in colours like amber, warm white or blue. Our collection empowers you to craft the perfect atmosphere for every occasion.



Kone

Delicacy of form

The Kone table elevates your space with its distinctive flair and atmosphere. Crafted from quality materials and featuring an original design, it serves not only as a functional piece but also as a beautiful decorative object. Its fusion of simplicity and character ensures it remains a timeless addition to your décor.





Kone 1 C

Mounting: surface
 Dimensions: Ø 5.24" x 10.51"
 Power: 10W spotlight + 1W down accent light (warm white/amber/blue)
 Luminous flux* (direct) 1100 lm
 Diffuser: PVD glass, lens
 Control : ON-OFF, DALI, CASAMBI




Kone 1 one

Mounting: suspended
 Dimensions: 8.43" x 15.67"
 Power: 10W spotlight + 2W up & down accent light (warm white/amber/blue)
 Luminous flux* (direct) 1200 lm
 Diffuser: PVD glass, lens
 Control : ON-OFF, DALI, CASAMBI



Kone 1 three

Mounting: suspended
 Dimensions: 26.77" x 15.67"
 Power: 30W spotlight + 6W up & down accent light (warm white/amber/blue)
 Luminous flux* (direct) 3600 lm
 Diffuser: PVD glass, lens
 Control : ON-OFF, DALI, CASAMBI




Kone 1 wall

Mounting: wall
 Dimensions: 10.28" x 15.67"
 Power: 10W spotlight + 2W up & down accent light (warm white/amber/blue)
 Luminous flux* (direct) 1200 lm
 Diffuser: PVD glass, lens
 Control : ON-OFF, DALI, CASAMBI




Features



Light source: CRI> 90, MacAdam ≤ 3, 50,000h L80B10
 Color temperature (CCT) 3000K, 4000K
 Control : ON-OFF, DALI, CASAMBI, TOUCH DIM
 IP protection: IP20


Kone 1 set three

Mounting: suspended
 Dimensions: Ø 24.17"
 Power: 30W spotlight + 6W up & down accent light (warm white/amber/blue)
 Luminous flux* (direct) 3600 lm
 Diffuser: PVD glass, lens
 Control : ON-OFF, DALI, CASAMBI




Kone 1 set five

Mounting: suspended
 Dimensions: Ø 30.31"
 Power: 50W spotlight + 10W up & down accent light (warm white/amber/blue)
 Luminous flux* (direct) 6000 lm
 Diffuser: PVD glass, lens
 Control : ON-OFF, DALI, CASAMBI




Kone 1 set seven

Mounting: suspended
 Dimensions: Ø 35.28"
 Power: 70W spotlight + 14W up & down accent light (warm white/amber/blue)
 Luminous flux* (direct) 8400 lm
 Diffuser: PVD glass, lens
 Control : ON-OFF, DALI, CASAMBI



Colors




Kone 2 wall

Mounting: wall / surface
 Dimensions: 33.78" x 10.04"
 Power: 23W
 Luminous flux* (direct) 1520 lm
 Diffuser: PVD glass
 Control : ON-OFF, DALI, CASAMBI




Kone 2 set four

Mounting: suspended
 Dimensions: 46.38" x 33.78"
 Power: 92W ambient light + 35 W (Chili LFO)
 Luminous flux* (direct) 6080 lm + 3120 lm (Chili LFO)
 Diffuser: LFO Bartenbach, PVD glass
 Control : ON-OFF, DALI, CASAMBI




Kone 2 set six

Mounting: suspended
 Dimensions: 90.79" x 33.78"
 Power: 138W ambient light + 71 W (Chili LFO)
 Luminous flux* (direct) 9120 lm + 6240 lm (Chili LFO)
 Diffuser: LFO Bartenbach, PVD glass
 Control : ON-OFF, DALI, CASAMBI



Kone 2 set eight

Mounting: suspended
 Dimensions: 118.11" x 33.78"
 Power: 184W ambient light + 88 W (Chili LFO)
 Luminous flux* (direct) 12160 lm + 7800 lm (Chili LFO)
 Diffuser: LFO Bartenbach, PVD glass
 Control : ON-OFF, DALI, CASAMBI

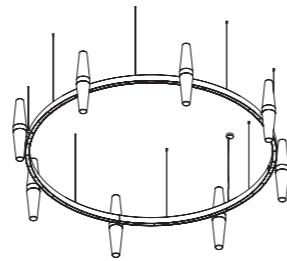

Features



Light source: CRI> 90, MacAdam ≤ 3, 50,000h L80B10
 Color temperature (CCT) 3000K, 4000K
 Control : ON-OFF, DALI, CASAMBI, TOUCH DIM
 IP protection: IP20

Kone 2 one

Mounting: suspended
 Dimensions: 33.78" x 9.13"
 Power: 23W ambient light
 Luminous flux* (direct) 1520 lm
 Diffuser: PVD glass
 Control : ON-OFF, DALI, CASAMBI



Kone 2 two

Mounting: suspended
 Dimensions: 67.52" x 9.13"
 Power: 46W ambient light
 Luminous flux* (direct) 3040 lm
 Diffuser: PVD glass
 Control : ON-OFF, DALI, CASAMBI



Kone 2 three

Mounting: suspended
 Dimensions: 101.38" x 9.13"
 Power: 69W ambient light
 Luminous flux* (direct) 4560 lm
 Diffuser: PVD glass
 Control : ON-OFF, DALI, CASAMBI



Kone 2 four

Mounting: suspended
 Dimensions: 33.78" x 9.13"
 Power: 92W ambient light
 Luminous flux* (direct) 6080 lm
 Diffuser: PVD glass
 Control : ON-OFF, DALI, CASAMBI



Kone table

Mounting: table
 Dimensions: Ø6.30" x 18.15"
 Power: 11.5W ambient
 Luminous flux* (direct) light 750 lm
 Diffuser: PVD glass, lens
 Control : TOUCH DIM

