



Linea 20 is a surface or suspended LED linear profile with a continuous light line (with 120 LEDs/m and opal diffuser applied) and angled illuminated connections. It comes in four lengths, 39.4", 78.7", 118.1" or 159.5". With a body made of aluminum, it comes in 4 standard finishes and over 20 different accessories.

TECHNICAL DATA

Wattage	18W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum
CCT	2700K, 3000K, 3500K, 4000K
CRI	85
Delivered Lumens	2034 lm per 3.28 feet (3000K)
Efficacy	113 lm/W
Optics	LED Tape, Field Cuttable (See page 2)
Finish	White Painted, Anodized, Black Anodized, Raw Aluminum
Fixture Dimensions	Length: 39.37", 78.74", 118.11", or 159.45" 120 LED / 3.28 ft (1 m) MAX LED Width: 0.79"
Fixture Weight	0.60 lbs
IP Rating	IP20

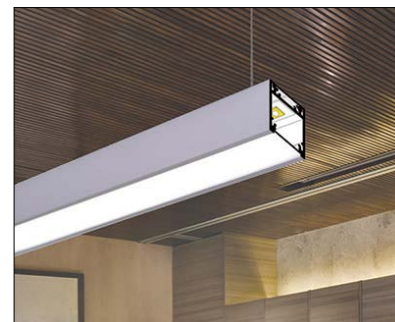


Fixture Dimensions



ORDERING INFORMATION

Example: C1010001.US. LED Tape / Accessories ordered separately.

C1			.US
Model No.	Length	Finish	
C1	0100 - 39.37"	00 - Raw Aluminum	.US
	0200 - 78.74"	01 - White Painted	
	0500 - 118.11"	20 - Anodized	
	0600 - 159.45"	21 - Black Anodized	

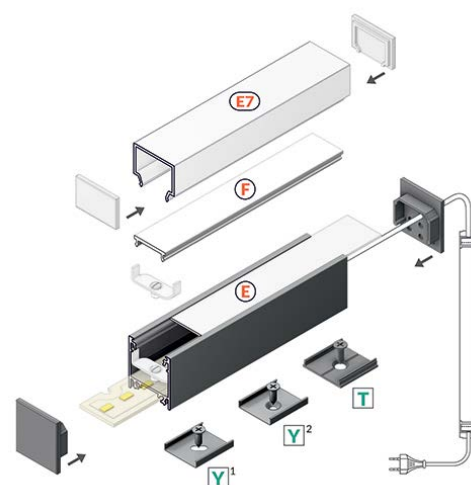


Job Name/Date:

Fixture Type Designation:

FINISHES



White Painted



Anodized




Black Anodized



Raw Aluminum

LED TAPE

24VDC - Field Cuttable



16.40' l x 0.4" w

PPLL00622 – 2700K

PPLL00623 – 3000K

PPLL00624 – 3500K

PPLL00625 – 4000K

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00690	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-1
PPLT00691	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-2
PPLT00709	ELV / TRIAC & 0-10V to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-4
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00530	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

End Caps



C19400XX

End Cap - LINEA20

Finish - XX

01 - White

02 - Black

22 - Gray

40 - Silver



C19999XX

End Cap - LINEA20-E7

Finish - XX


01 - White

02 - Black

22 - Gray

40 - Silver

Mounting



C6XXXX00

LED Mounting - LINEA20

Length - XXXX



0500 - 39.37"

0600 - 78.74"

0700 - 118.11"

0800 - 159.45"



Mounting Plate



Y - Flexible Mounting Plate

A2090019 (20 pcs)



Inox - Stainless Steel



Cone Y - Mounting Plate

A2130019 (20 pcs)

Inox - Stainless Steel



T - Mounting Plate

C6960000 (20 pcs)

Raw Aluminum

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Sling for Mounting




Sling for LED

Mounting 1500

67140003 - Chrome

Compatible with flexible mounting plates. Fast, easy assembly mounting to profile.

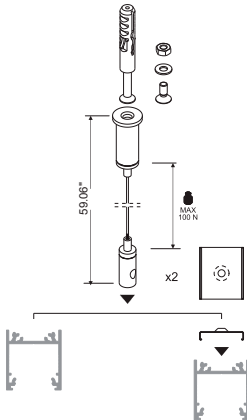

SELV Sling 50V 1500


(max 50V)

67120001 - White

67120022 - Silver


67120002 - Black

Minimalistic look, no additional wires required.

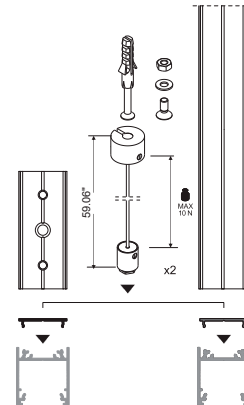

ACCESSORIES

Connectors




C18500__

Connector LINEA20 - 60°

01 - White Painted

20 - Anodized

02 - Black Anodized



C18600__

Connector LINEA20 - 90°

01 - White Painted

20 - Anodized


02 - Black Anodized

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Connectors

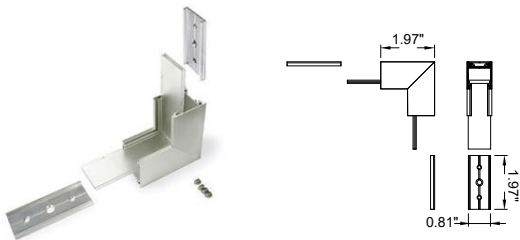


C18700__

Connector LINEA20 - 90° Bent

01 - White Painted

20 - Anodized

02 - Black Anodized

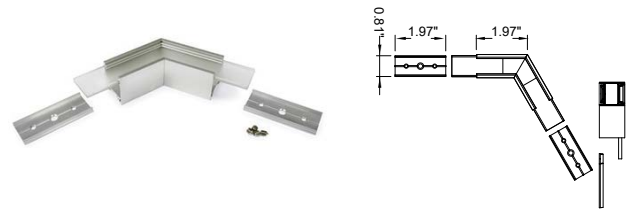


C18800__

Connector LINEA20 - 120°

01 - White Painted

20 - Anodized

02 - Black Anodized

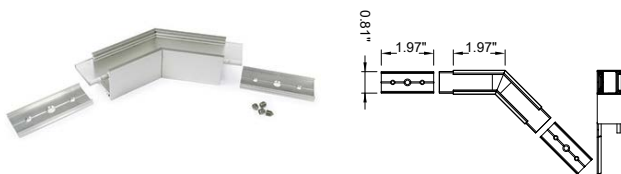

C18900__

Connector LINEA20 - 135°

01 - White Painted


20 - Anodized

02 - Black Anodized



C1900000

Connector LINEA20 - 180°

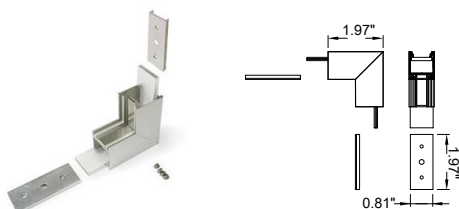

C19100

Connector LINEA20 - 270° Bent

01 - White Painted

20 - Anodized

02 - Black Anodized




60°



90°



120°



135°




180°

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Diffusers



C1070038
Diffuser E7 click 1000
opal / plastic bag



A2050038
Diffuser F click 1000
opal



A2050016
Diffuser F click 1000
transparent




A2210038S
diffuser F click 20m (65.62') reel
opal



A2000138
Diffuser E slide 1000
opal



A2000139
Diffuser E slide 1000
frosted



A2000116
Diffuser E slide 1000
transparent

ACCESSORIES

Other



C6940001
LINEA20 LED clamp
white painted (20 pcs)



C6930001
LINEA20-1 LED clamp
white (20 pcs)

Job Name/Date:

Fixture Type Designation: