


Nami 23 is a unique, suspended linear profile made of aluminum that has a minimalist look and refined details designed for painting. It comes in four lengths, 39.4", 78.7", 118.1", or 159.5", with 8 standard finishes and convenient mounting.

TECHNICAL DATA

Wattage	18W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum Diffusers: PMMA (Acrylic)
CCT	2700K, 3000K, 3500K, 4000K
CRI	85
Delivered Lumens	2034 lm per 3.28 feet (3000K)
Efficacy	113 lm/W
Optics	LED Tape, Field Cuttable (See page 2)
Finish	8 Standard, See Below
Fixture Dimensions	Length: 39.37", 78.74", 118.11", or 159.45" MAX LED Width: 0.91"
IP Rating	IP20

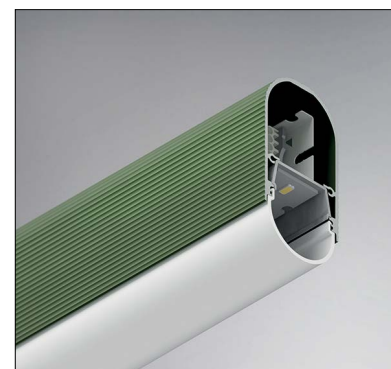


ORDERING INFORMATION

Example: K1000197.US and K1000520.US. LED Tape / Accessories ordered separately.

K1			.US
Model No.	Length	Finish	
K1	0001 - 39.37" 0002 - 78.74" 0003 - 118.11" 0004 - 159.45" NOTE: Lengths 118.1" and 159.5" not available in Titanium Blue, Slate Pink, Almond Beige, and Medium Black.	01 - White Painted 21 - Black Anodized 00 - Raw Aluminum 97 - Titanium Blue 95 - Slate Pink 96 - Almond Beige 94 - Medium Black	.US
	0005 - 39.37" 0006 - 78.74" 0007 - 118.11" 0008 - 159.45" NOTE: Codes 0005, 0006, 0007, and 0008 only available for complementary profile in Anodized finish. Order along with profile.	20 - Anodized (Complementary Profile)	

Fixture Dimensions

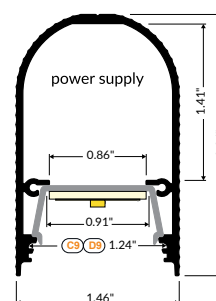

Job Name/Date:

Fixture Type Designation:

FINISHES



White Painted



Black Anodized



Raw Aluminum



Titanium Blue



Slate Pink



Almond Beige




Medium Black

Anodized
Complementary Profile

LED TAPE

24VDC - Field Cuttable



16.40' l x 0.4" w

PPLL00622 – 2700K

PPLL00623 – 3000K

PPLL00624 – 3500K

PPLL00625 – 4000K

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00690	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-1
PPLT00691	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-2
PPLT00709	ELV / TRIAC & 0-10V to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-4
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00530	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

End Caps



K19998__
End Cap NAMI23
01 - White
02 - Black
22 - Gray




K19999__
End Cap NAMI23-D9
01 - White
02 - Black
22 - Gray



K19996__
End Cap NAMI23 Metal
01 - White
02 - Black
22 - Inox
97 - Titanium Blue
95 - Slate Pink
96 - Almond Beige
94 - Medium Black



K19997__
End Cap NAMI23-D9 Metal
01 - White
02 - Black
22 - Inox
97 - Titanium Blue
95 - Slate Pink
96 - Almond Beige
94 - Medium Black

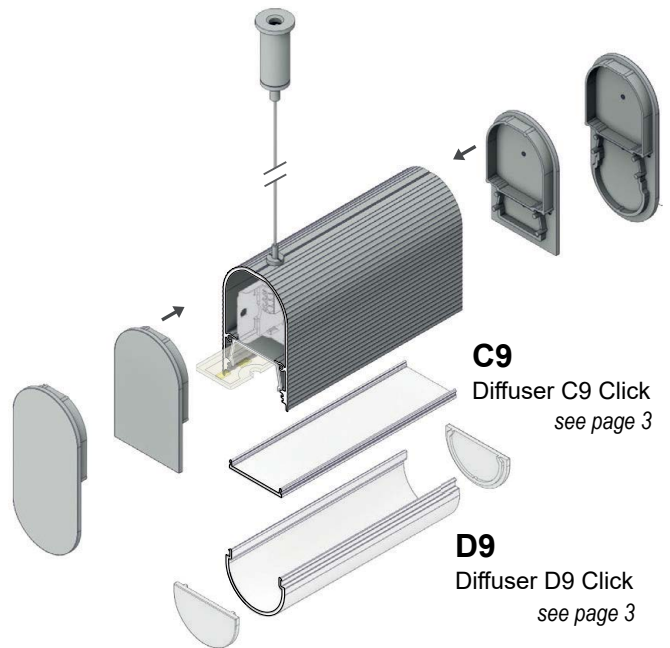

C9
Diffuser C9 Click
see page 3

D9
Diffuser D9 Click
see page 3

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Diffusers



V3450016 - 39.4 in
V3460016 - 78.7 in
V3470016 - 118.1 in
V3480016 - 161.4 in
 Diffuser C9 click
transparent




V3450038 - 39.4 in
V3460038 - 78.7 in
V3470038 - 118.1 in
V3480038 - 161.4 in
 Diffuser C9 click
opal



V3450041 - 39.4 in
V3460041 - 78.7 in
V3470041 - 118.1 in
V3480041 - 161.4 in
 Diffuser C9 click
black



V3490038 - 39.4 in
V3500038 - 78.7 in
V3510038 - 118.1 in
V3520038 - 161.4 in
 Diffuser D9 click
opal



V4980038
 End Caps D9
opal

Job Name/Date:

Fixture Type Designation: