OLO 1.1

datasheet

Olo is an IP66-rated bollard with a head tiltable by ±6°, providing a targeted downlight perfect for walkways, gardens and public spaces. Combining elegance, efficiency and sustainability in a minimalist design, it reduces light pollution while providing a 360° radial, or a 180° semicircular emission of light. Olo 1.1 is 39.4" in height, and available in 4 color temperatures, and 4 standard finishes.



Fixture Dimensions



TECHNICAL DATA

Wattage	14W, 19W
Power Supply	Integral 120-277VAC
Dimming	On/Off or DALI 2 *(0-10V on request)*
Construction	Head: Die-cast Aluminum EN AB 47100 Body: Anticorodal Aluminum Alloy Mounting Plate: 316L Stainless Steel Lens: Optical Grade PC
CCT	2200K, 2700K, 3000K, 4000K 2200K+3000K (DALI only)
CRI	80
BUG Rating	B1-U1-G1
Delivered Lumens	1460 lm (14W, 3000K, 180°) 2057 lm (19W, 3000K, 360°)
Efficacy	104.3 lm/W (14W, 3000K, 180°) 108.3 lm/W (19W, 3000K, 360°)
Optics	Radial 180°, Radial 360°
Finishes	Gray, Cor-ten, White, Anthracite *(4 Stage Marine Grade Finish)*
Fixture Dimensions	Ø8.11" x 39.4" h Base: Ø4.33"
Fixture Weight	15.87 lbs
LED Source	72 mid-power LEDs, 156 mid-power LEDs,
Lumen Maintenance	L90, B10 >60,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66
Impact Rating	IK10

ORDERING INFORMATION

Example: LL111000005RAT. Accessories ordered separately.

LL111			**00**			
Model #	**Wattage**	**Power/Dim**	**Optical Accessory**	**CCT**	**Optics**	**Finish**
LL111	**0** - 14W (180°) **1** - 19W (360°) **NOTE:** *180° option is 14W, 360° option is 19W*	**00** - On/Off **0D** - DALI-2 **Note:** 0-10V Dimming available on request	**00** - No accessory	**Z** - 2200K+3000K *(DALI-2 only)* **N** - 2200K **F** - 2700K **5** - 3000K **9** - 4000K	**RA** - 180° (14W) **RR** - 360° (19W)	**H** - Anthracite **T** - Corten **F** - Gray **E** - White

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2025 Designplan Lighting, Inc.

Published: November 19, 2026

P: 908-996-7710
F: 908-996-7042

FINISHES



ACCESSORIES



WULL10A0
Anchor Kit with Bolts

ACCESSORIES
Wiring



WFA02
IP68 “h”-type three-way connector
(82x53.3x28 mm)



WFA06
FTwo-pin male-female connector
IP66-IP68

Job Name/Date:

Fixture Type Designation:

© Copyright 2025 Designplan Lighting, Inc.

PHOTOMETRIC DATA

Note: All Photometry is 3000K

Maximum Candela = 526.6

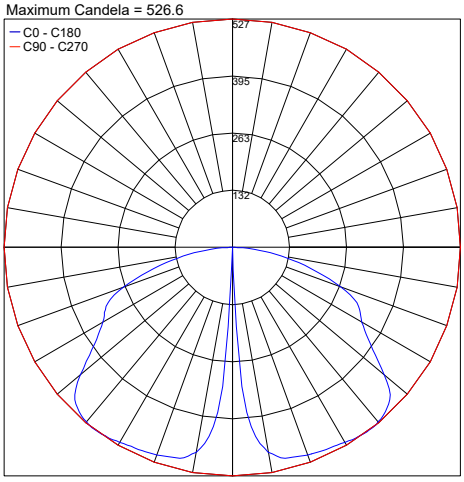

PHOTOMETRIC FILENAME : OLO_1.1_RR_3000K_19W.IES

Maximum Candela = 474.6

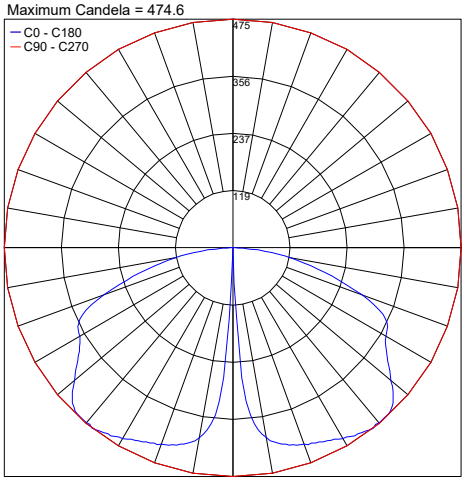

PHOTOMETRIC FILENAME : OLO_1.1_RR_FULL_3000K_19W_DALI.IES

Maximum Candela = 301.7

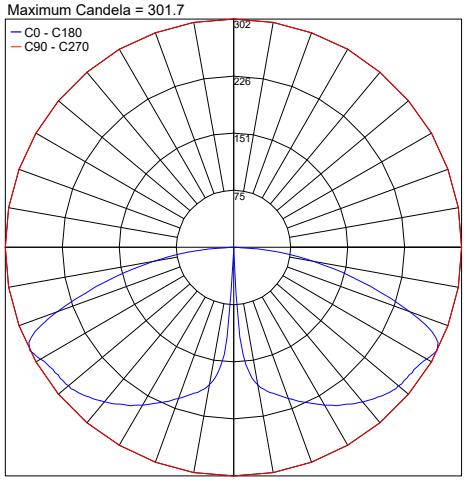

PHOTOMETRIC FILENAME : OLO_1.1_RR_LONG_3000K_19W_DALI.IES

Maximum Candela = 238.0

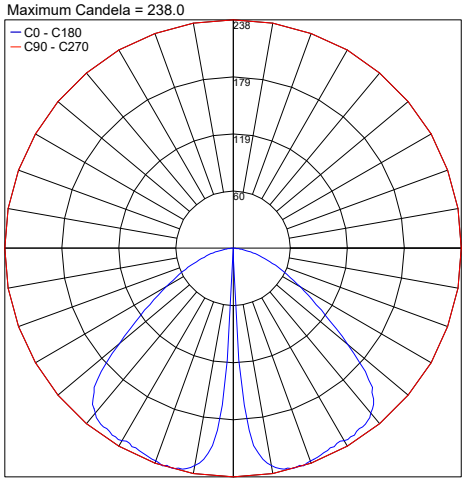

PHOTOMETRIC FILENAME : OLO_1.1_RR_SHORT_3000K_19W_DALI.IES

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2025 Designplan Lighting, Inc.

Published: November 19, 2026

P: 908-996-7710
F: 908-996-7042