


Phil V2 is a surface mounted or suspended LED linear profile made of aluminum with a rating of $UGR \leq 19$. It is offered in 2 lengths, 78.7" or 159.5". and 4 standard finishes, and 5 diffuser options.

TECHNICAL DATA

Wattage	18W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum Diffuser: PMMA (Acrylic) Connectors: Zinc Coated Steel
CCT	2700K, 3000K, 3500K, 4000K
CRI	85
Delivered Lumens	2034 lm per 3.28 feet (3000K)
Efficacy	113 lm/W
Optics	LED Tape, Field Cuttable (See page 2)
Finish	White Painted, Anodized, Black Anodized, Raw Aluminum
Fixture Dimensions	Length: 78.74" or 159.45" MAX LED Width: 0.91"
IP Rating	IP20



Fixture Dimensions

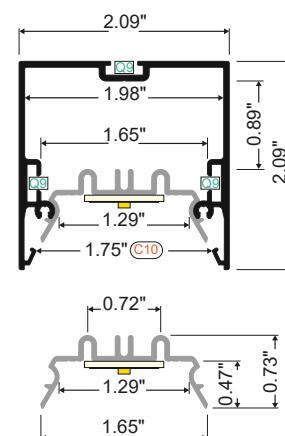

ORDERING INFORMATION


Example: P2000200.US and P2000600.US. LED Tape / Accessories ordered separately.

P2			.US
Model No.	Length	Finish	
P2	0002 - 78.74"	00 - Raw Aluminum	.US
	0004 - 159.45"	01 - White Painted	
		21 - Black Anodized	
		20 - Anodized	
	0006 - 78.74" Complementary Profile	20 - Anodized	
	0008 - 159.45" Complementary Profile		
	NOTE: Codes 0006 and 0008 for complementary profile only in Anodized finish. Order along with profile.		

Job Name/Date:

Fixture Type Designation:

FINISHES



White Painted




Black Anodized



Raw Aluminum




Anodized



Anodized
Complementary Profile

LED TAPE

24VDC - Field Cuttable



16.40' l x 0.4" w

PPLL00622 – 2700K

PPLL00623 – 3000K

PPLL00624 – 3500K

PPLL00625 – 4000K

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures 18W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-4

*For other power supply options consult factory.**Job Name/Date:**Fixture Type Designation:*

ACCESSORIES

Covers



63___01

5500 - 39.37"


5600 - 78.74"

7400 - 118.11"

7500 - 159.45"

Cover C10⁴

White Painted



63___20

5500 - 39.37"


5600 - 78.74"

7400 - 118.11"

7500 - 159.45"

Cover C10⁴

Anodized



63___02

5500 - 39.37"

5600 - 78.74"

7400 - 118.11"

7500 - 159.45"

Cover C10⁴

Black Painted



63___00

5500 - 39.37"

5600 - 78.74"

7400 - 118.11"


7500 - 159.45"

Cover C10⁴

Raw Aluminum

ACCESSORIES

Diffusers






63690038 - 78.7 in

63700038 - 157.5 in

Diffuser C10¹ click

Opal





63620000 - 78.7 in

63800000 - 159.5 in

Diffuser C10² click

Narrow




Job Name/Date:



Fixture Type Designation:

ACCESSORIES



Diffusers / End Caps




63590000 - 78.7 in
63780000 - 157.5 in
Diffuser C10³ click
Wide

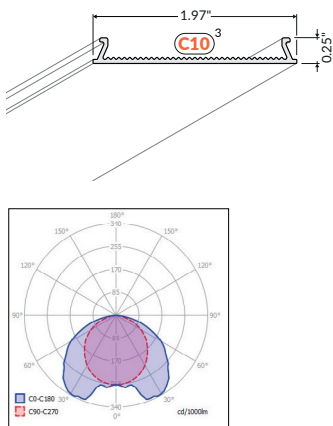


P2001016 - 78.7 in
P2001216 - 159.5 in
Diffuser C10⁵ click
Pro

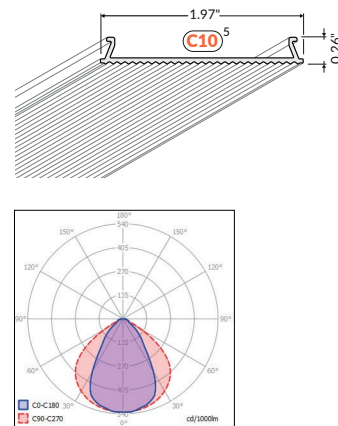

P2001438 - 78.7 in
P2001638 - 157.5 in
Diffuser C10⁶ click
Basic

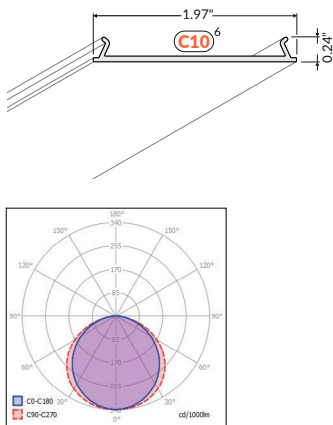


End Caps




P29999__
End Cap
01 - White
02 - Black
22 - Gray
40 - Silver

ACCESSORIES


Connectors

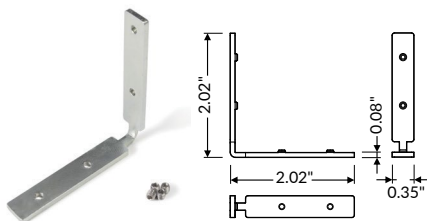

V5999519S
Connector Q9¹ 90° Bent
Zinc Coated Steel

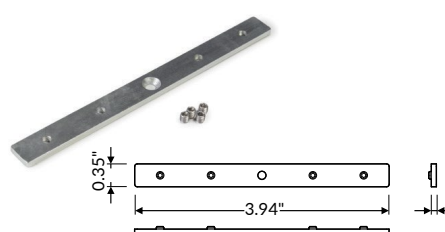

V5999819S
Connector Q9² 180°
Zinc Coated Steel

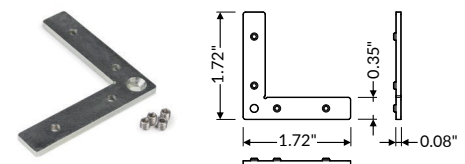

V5999419S
Connector Q9⁵ 90°
Zinc Coated Steel

Job Name/Date:

Fixture Type Designation:


ACCESSORIES

Sling - Suspension Kit



sling SELV 50 V 1500

sling for mounting

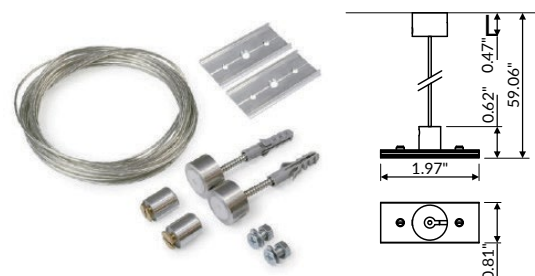


671200__ (Sling SELV)


01 - White

22 - Silver


02 - Black

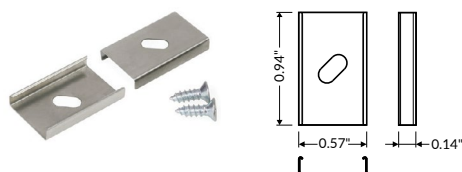


76380000
Mounting Plate U
Inox Stainless Steel

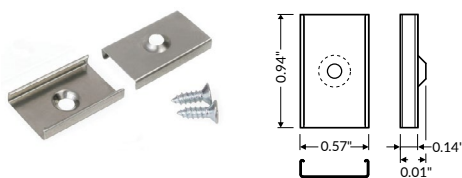

76620000
Mounting Plate U Cone
Inox Stainless Steel

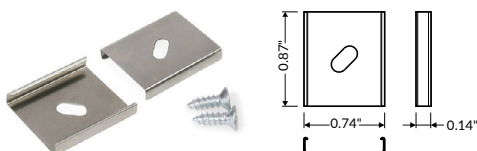

A2090019
Mounting Plate Y
Inox Stainless Steel

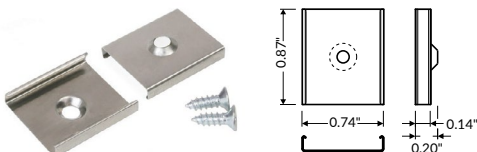


A2130019
Mounting Plate Y Cone
Inox Stainless Steel



671400__ (Sling for Mounting)

03 - Chrome

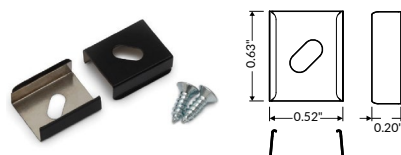


892700__
Mounting Plate Z

01 - White

19 - Inox SS

02 - Black

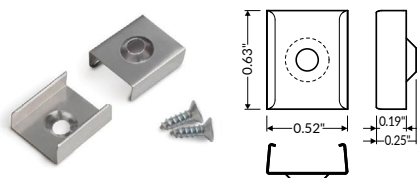

899800__
Mounting Plate Z Cone

01 - White

19 - Inox SS

02 - Black

Job Name/Date:

Fixture Type Designation: