


Phil V2 is a surface mounted or suspended LED linear profile made of aluminum with a rating of UGR \leq 19. It is offered in 2 lengths, 78.7" or 159.5". and 4 standard finishes, and 5 diffuser options.

TECHNICAL DATA

Wattage	18W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum Diffuser: PMMA (Acrylic) Connectors: Zinc Coated Steel
CCT	2700K, 3000K, 4000K
CRI	85
Delivered Lumens	2034 lm per 3.28 feet (3000K)
Efficacy	113 lm/W
Optics	LED Tape, Field Cuttable (See page 2)
Finish	White Painted, Anodized, Black Anodized, Raw Aluminum
Fixture Dimensions	Length: 78.74" or 159.45" MAX LED Width: 0.91"
IP Rating	IP20



Fixture Dimensions

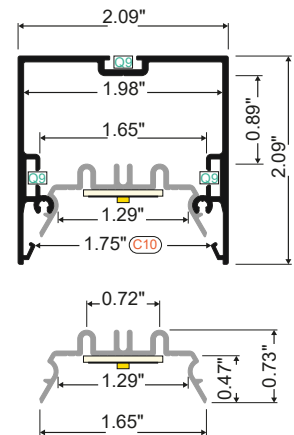

ORDERING INFORMATION


Example: P2000200.US and P2000600.US. LED Tape / Accessories ordered separately.

P2			.US
Model No.	Length	Finish	
P2	0002 - 78.74"	00 - Raw Aluminum	.US
	0004 - 159.45"	01 - White Painted 21 - Black Anodized 20 - Anodized	
	0006 - 78.74" Complementary Profile 0008 - 159.45" Complementary Profile	20 - Anodized	
NOTE: Codes 0006 and 0008 for complementary profile only in Anodized finish. Order along with profile.			


Job Name/Date:

Fixture Type Designation:


FINISHES



White Painted




Black Anodized



Raw Aluminum




Anodized

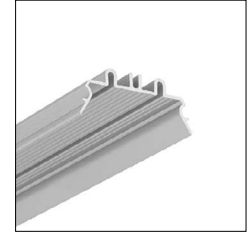

Anodized
Complementary Profile

LED TAPE

24VDC - Field Cuttable



PPLL00622 – 2700K

PPLL00623 – 3000K

PPLL00624 – 4000K

16.40' l x 0.4" w

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00690	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-1
PPLT00691	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-2
PPLT00709	ELV / TRIAC & 0-10V to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-4
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00530	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4


For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

ACCESSORIES


Covers




63___01
5500 - 39.37"
5600 - 78.74"
7400 - 118.11"
7500 - 159.45"
 Cover C10⁴
White Painted



63___20
5500 - 39.37"
5600 - 78.74"
7400 - 118.11"
7500 - 159.45"
 Cover C10⁴
Anodized




63___02
5500 - 39.37"
5600 - 78.74"
7400 - 118.11"
7500 - 159.45"
 Cover C10⁴
Black Painted





63___00
5500 - 39.37"
5600 - 78.74"
7400 - 118.11"
7500 - 159.45"
 Cover C10⁴
Raw Aluminum

ACCESSORIES



Diffusers



63690038 - 78.7 in
63700038 - 157.5 in
 Diffuser C10¹ click
Opal

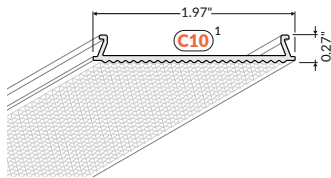

63620000 - 78.7 in
63800000 - 159.5 in
 Diffuser C10² click
Narrow


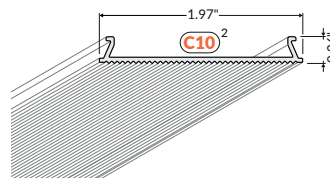


Job Name/Date:




Fixture Type Designation:

ACCESSORIES




Diffusers / End Caps

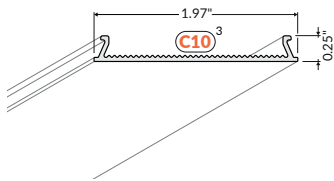

63590000 - 78.7 in
63780000 - 157.5 in
 Diffuser C10³ click
 Wide

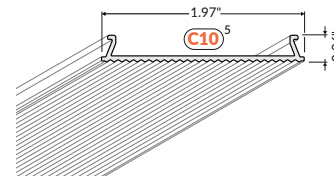

P2001016 - 78.7 in
P2001216 - 159.5 in
 Diffuser C10⁵ click
 Pro

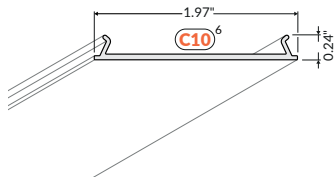

P2001438 - 78.7 in
P2001638 - 157.5 in
 Diffuser C10⁶ click
 Basic


End Caps




P29999
 End Cap
01 - White
02 - Black
22 - Gray
40 - Silver

ACCESSORIES


Connectors

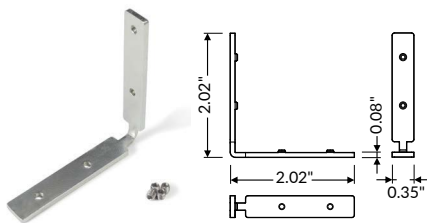

V5999519S
 Connector Q9¹ 90° Bent
 Zinc Coated Steel

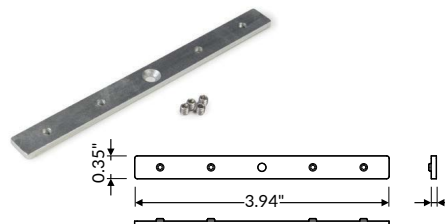

V5999819S
 Connector Q9² 180°
 Zinc Coated Steel

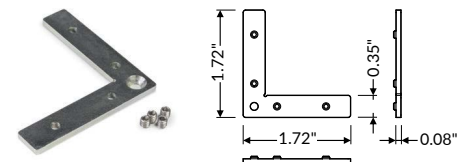

V5999419S
 Connector Q9⁵ 90°
 Zinc Coated Steel

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Sling - Suspension Kit



sling SELV 50 V 1500

sling for mounting





671200__ (Sling SELV)

01 - White



22 - Silver

02 - Black

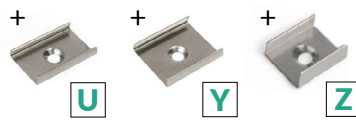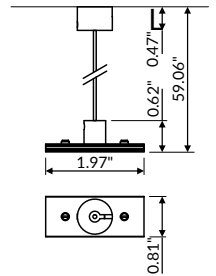


671400__ (Sling for Mounting)

03 - Chrome

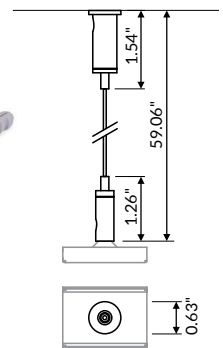


76380000

Mounting Plate U
Inox Stainless Steel




76620000

Mounting Plate U Cone
Inox Stainless Steel




A2090019

Mounting Plate Y
Inox Stainless Steel



A2130019

Mounting Plate Y Cone
Inox Stainless Steel




892700__

Mounting Plate Z

01 - White

19 - Inox SS

02 - Black



899800__

Mounting Plate Z Cone

01 - White

19 - Inox SS

02 - Black

Job Name/Date:

Fixture Type Designation: