




LED light bar R-SL16-PL

description:	LED pendant lamp, profile Ø 0.63 in, 360° rotatable
housing color:	aluminum anodized black, silver, gold
LED:	mid power LED, high CRI DIN EN 55015:2013, lifetime 50,000 hours basis of lifetime L80B10
protection class:	IP20, protection class III, UL Listed No. E506729 - low voltage LED luminaire
power input:	24VDC (constant voltage)
allowed LED supply:	- remote power supply with constant voltage 24VDC, class 2 - additional power supply is required for C1-mini-R-SL spotlight: LPF, LPV, NPF or APV with constant voltage 12VDC, class 2 (see datasheet)
dimming:	external
optional accessories:	anti-glare profile, aluminum anodized black, silver, gold or powder-coated according to RAL, light diffusion foil, LED spotlight C1-mini-R-SL

R-SL-16-PL	optic (linear optic satined)	light color (+/- 100 K)	LED	luminous flux (~3,000 K ~50°)
7W	~22°, ~35°, ~50°, ~55° beam angle	~3,000 K, ~4,000 K	240 LEDs/3.28 ft (smallest separable unit 0.98 in)	~400lm/3.28 ft at ~7 W/3.28 ft (57lm/W)
15W	~22°, ~35°, ~50°, ~55° beam angle	~2,700 K, ~3,000 K, ~3,500 K, ~4,000 K, Tunable White ~2,700 K - 6,500 K	240 LEDs/3.28 ft (smallest separable unit 0.98 ft)	~900lm/3.28 ft at ~15 W/3.28 ft (60lm/W)
20W	~22°, ~35°, ~50°, ~55° beam angle	~3,000 K, ~4,000 K	240 LEDs/3.28 ft (smallest separable unit 0.98 ft)	~1300lm/3.28 ft at ~20 W/3.28 ft (65lm/W)

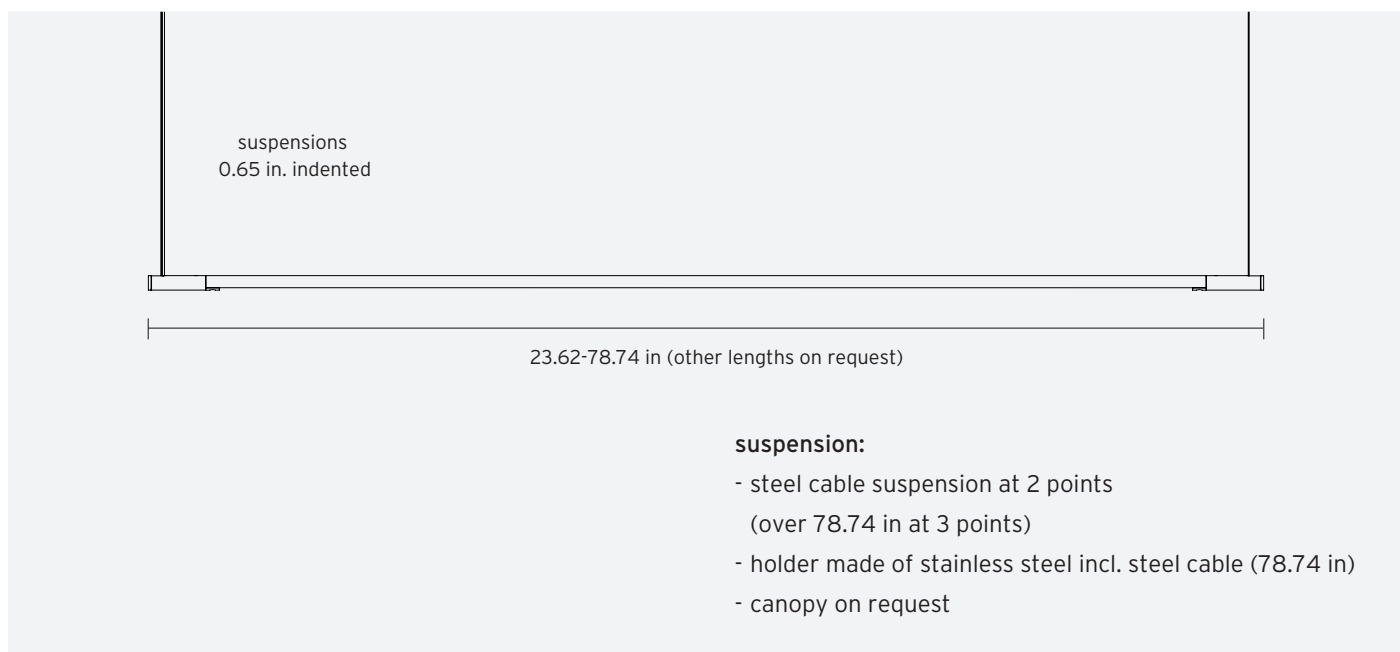

photometry

for light color ~3,000 K | linear optics ~50° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

