


# SKIRT 10


Skirt 10 is a special application linear profile that is an elegant and robust skirting board for LED strips with convenient installation. With a body made of aluminum, it is available in 4 lengths, 39.4", 78.7", 118.1" or 159.5", and 3 standard finishes.

## TECHNICAL DATA

Wattage	18W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum
CCT	2700K, 3000K, 3500K, 4000K
CRI	85
Delivered Lumens	2034 lm per 3.28 feet (3000K)
Efficacy	113 lm/W
Optics	LED Tape, Field Cuttable (See page 2)
Finish	White Painted, Anodized, Raw Aluminum
Fixture Dimensions	Length: 39.37", 78.74", 118.11" or 159.45" 60 LED/3.28 ft Max LED Width: 0.39"
IP Rating	IP20

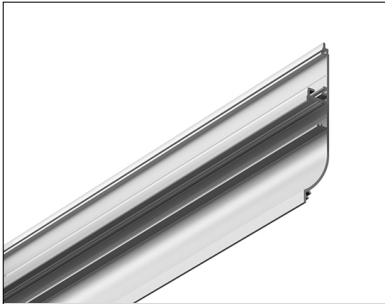

Fixture Dimensions

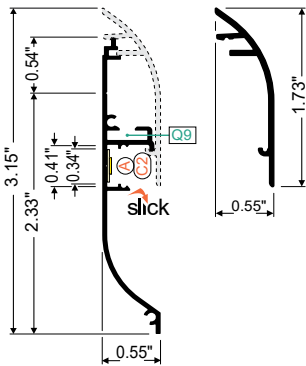

## ORDERING INFORMATION

Example: J2000200.US. LED Tape / Accessories ordered separately.

J2			.US
Model No.	Length	Finish	
J2	0001 - LED Profile 39.37" 0002 - LED Profile 78.74" 0003 - LED Profile 118.11" 0004 - LED Profile 159.45"  0005 - Complementary Profile 39.37" 0006 - Complementary Profile 78.74" 0007 - Complementary Profile 118.11" 0008 - Complementary Profile 159.45"	00 - Raw Aluminum 01 - White Painted 20 - Anodized	.US


Job Name/Date:

Fixture Type Designation:

## FINISHES



White Painted  
LED Profile




Anodized  
LED Profile




Raw Aluminum  
LED Profile



White Painted  
Complementary Profile




Anodized  
Complementary Profile



Raw Aluminum  
Complementary Profile

## LED TAPE

24VDC - Field Cuttable



16.40' l x 0.4" w

**PPLL00622** – 2700K

**PPLL00623** – 3000K

**PPLL00624** – 3500K

**PPLL00625** – 4000K

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715


Part Number	Description	Input/Output	# of Fixtures 18W
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-4

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## MOUNTING DIAGRAM

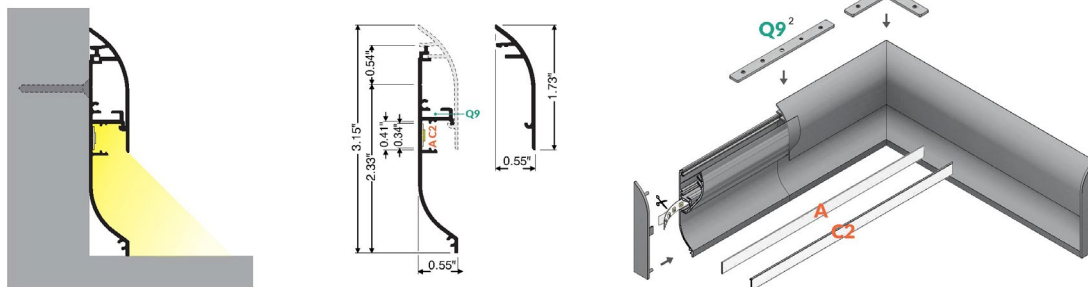


## ACCESSORIES


### End Caps / Diffusers




**J29989**  
End Cap  
**01** - White  
**22** - Gray  
**40** - Silver




**89000638**  
Diffuser A Slide 1000  
*opal*




**89000639**  
Diffuser A Slide 1000  
*frosted*




**89000616**  
Diffuser A Slide 1000  
*transparent*



**89000116**  
Diffuser C Click 1000  
*transparent*



**89000138**  
Diffuser C Click 1000  
*opal*




**89000538S**  
Diffuser C Click 20m  
(65.62') reel / pack  
*opal*

Job Name/Date:

Fixture Type Designation:


## ACCESSORIES

### Connectors

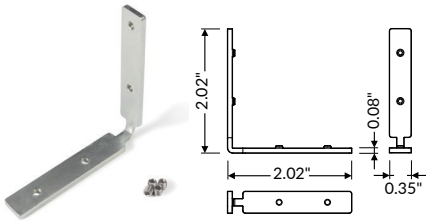


#### V5999519S

Connector Q9¹ 90° Bent  
Zinc Coated Steel

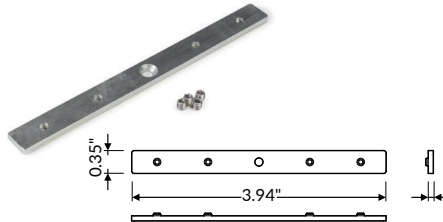

#### V5999819S

Connector Q9² 180°  
Zinc Coated Steel

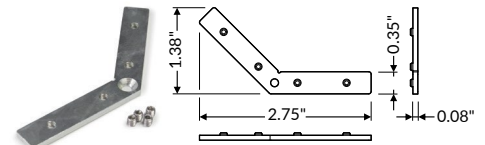


#### V5999719S

Connector Q9³ 135°  
Zinc Coated Steel


## ACCESSORIES

### Connectors

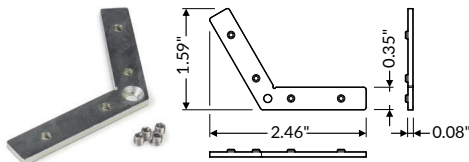


#### V5999619S

Connector Q9⁴ 120°  
Zinc Coated Steel

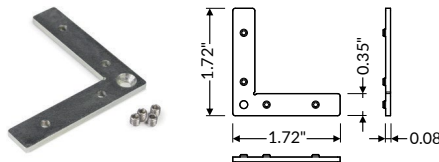


#### V5999419S

Connector Q9⁵ 90°  
Zinc Coated Steel

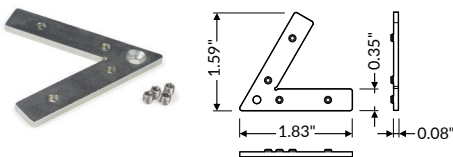

#### V5999319S

Connector Q9⁶ 60°  
Zinc Coated Steel

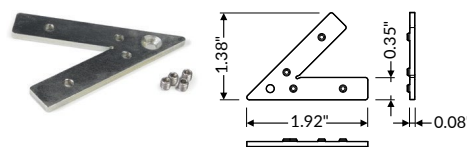

#### V5999219S

Connector Q9⁷ 45°  
Zinc Coated Steel

Job Name/Date:

Fixture Type Designation: