


# SKIRT 10


Skirt 10 is a special application linear profile that is an elegant and robust skirting board for LED strips with convenient installation. With a body made of aluminum, it is available in 4 lengths, 39.4", 78.7", 118.1" or 159.5", and 3 standard finishes.

## TECHNICAL DATA

<b>Wattage</b>	18W per 3.28 ft (1 m)
<b>Power Supply</b>	Remote 24VDC, not included. See page 2
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	85
<b>Delivered Lumens</b>	2034 lm per 3.28 feet (3000K)
<b>Efficacy</b>	113 lm/W
<b>Optics</b>	LED Tape, Field Cuttable (See page 2)
<b>Finish</b>	White Painted, Anodized, Raw Aluminum
<b>Fixture Dimensions</b>	Length: 39.37", 78.74", 118.11" or 159.45" 60 LED/3.28 ft Max LED Width: 0.39"
<b>IP Rating</b>	IP20

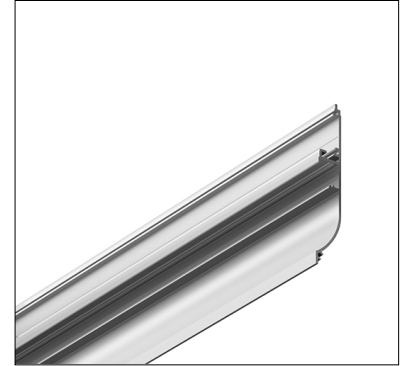

Fixture Dimensions

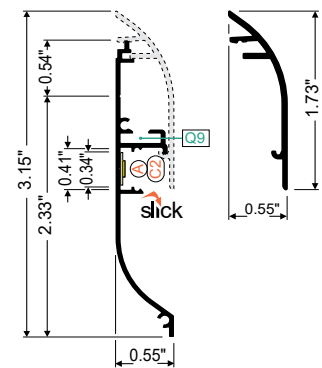

## ORDERING INFORMATION

Example: J2000200.US. LED Tape / Accessories ordered separately.

J2			.US
Model No.	Length	Finish	
J2	<b>0001</b> - LED Profile 39.37" <b>0002</b> - LED Profile 78.74" <b>0003</b> - LED Profile 118.11" <b>0004</b> - LED Profile 159.45" <hr/> <b>0005</b> - Complementary Profile 39.37" <b>0006</b> - Complementary Profile 78.74" <b>0007</b> - Complementary Profile 118.11" <b>0008</b> - Complementary Profile 159.45"	<b>00</b> - Raw Aluminum <b>01</b> - White Painted <b>20</b> - Anodized	.US


Job Name/Date:

Fixture Type Designation:


## FINISHES



White Painted  
LED Profile



Anodized  
LED Profile




Raw Aluminum  
LED Profile



White Painted  
Complementary Profile




Anodized  
Complementary Profile



Raw Aluminum  
Complementary Profile

## LED TAPE

24VDC - Field Cuttable



**PPLL00622** – 2700K

**PPLL00623** – 3000K

**PPLL00624** – 4000K

16.40' l x 0.4" w

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00481</a>	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
<a href="#">PPLT00690</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-1
<a href="#">PPLT00691</a>	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-2
<a href="#">PPLT00709</a>	ELV / TRIAC & 0-10V to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-4
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
<a href="#">PPLT00530</a>	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## MOUNTING DIAGRAM

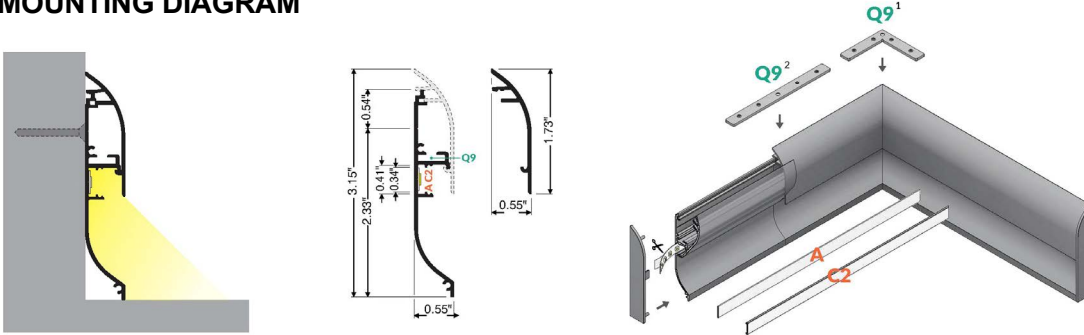


## ACCESSORIES


### End Caps / Diffusers




**J29989**  
End Cap  
01 - White  
22 - Gray  
40 - Silver




**89000638**  
Diffuser A Slide 1000  
*opal*




**89000639**  
Diffuser A Slide 1000  
*frosted*




**89000616**  
Diffuser A Slide 1000  
*transparent*



**89000116**  
Diffuser C Click 1000  
*transparent*



**89000138**  
Diffuser C Click 1000  
*opal*




**89000538S**  
Diffuser C Click 20m  
(65.62') reel / pack  
*opal*

Job Name/Date:


Fixture Type Designation:

## ACCESSORIES


### Connectors

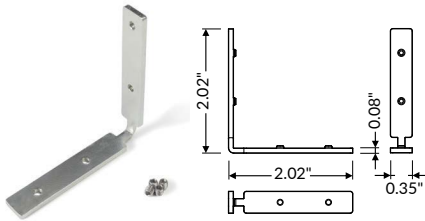

**V5999519S**  
Connector Q9¹ 90° Bent  
Zinc Coated Steel

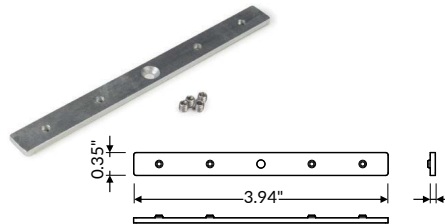


**V5999819S**  
Connector Q9² 180°  
Zinc Coated Steel

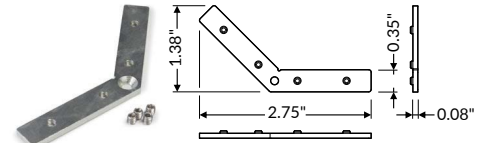


**V5999719S**  
Connector Q9³ 135°  
Zinc Coated Steel

## ACCESSORIES


### Connectors

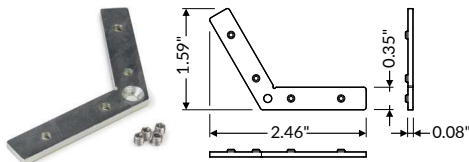


**V5999619S**  
Connector Q9⁴ 120°  
Zinc Coated Steel

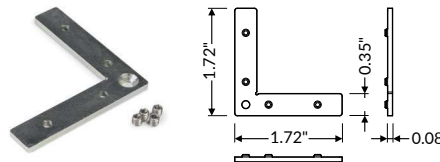

**V5999419S**  
Connector Q9⁵ 90°  
Zinc Coated Steel

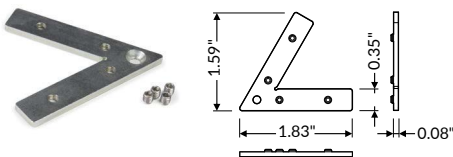

**V5999319S**  
Connector Q9⁶ 60°  
Zinc Coated Steel

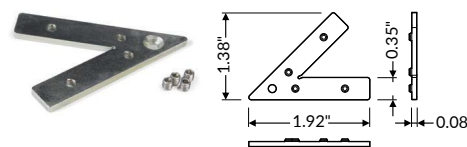

**V5999219S**  
Connector Q9⁷ 45°  
Zinc Coated Steel

Job Name/Date:

Fixture Type Designation: