


SMOOTH 12


Smooth 12 is a plaster-in LED linear profile that creates atmospheric light with the element of invisibility great for accentuating a room outline. With a body made of aluminum, it is available in 4 lengths, 39.4", 78.7", 118.1", or 159.5" and a raw aluminum finish.

TECHNICAL DATA

Wattage	18W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum
CCT	2700K, 3000K, 3500K, 4000K
CRI	85
Delivered Lumens	2034 lm per 3.28 feet (3000K)
Efficacy	113 lm/W
Optics	LED Tape, Field Cuttable (See page 2)
Finish	Raw Aluminum
Fixture Dimensions	Length: 39.37", 78.74", 118.11" or 159.45" Max LED Width: 0.47"
IP Rating	IP20

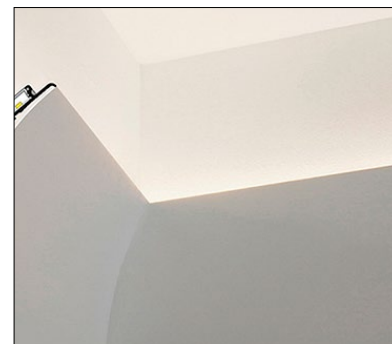


Fixture Dimensions

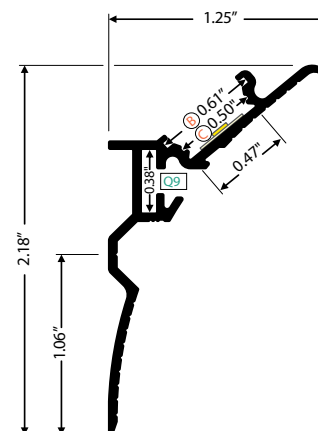

ORDERING INFORMATION

Example: J2000200.US. LED Tape / Accessories ordered separately.

J2		00	.US
Model No.	Length	Finish	
J2	0001 - 39.37" 0002 - 78.74" 0003 - 118.11" 0004 - 159.45"	00 - Raw Aluminum	.US

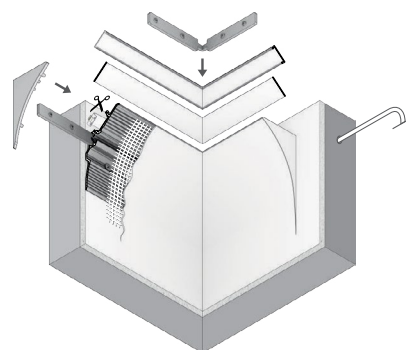


Job Name/Date:

Fixture Type Designation:

LED TAPE

24VDC - Field Cuttable



16.40' l x 0.4" w

PPLL00622 – 2700K**PPLL00623** – 3000K**PPLL00624** – 3500K**PPLL00625** – 4000K**SUGGESTED POWER SUPPLIES**

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures 18W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-4


For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES


End Caps / Diffusers



H9999922

End Cap


gray



76000116 - 39.4"

76000216 - 78.7"


Diffuser B Slide
transparent



76000139 - 39.4"

76000239 - 78.7"


76000339 - 118.1"
Diffuser B Slide
frosted



76000138 - 39.4"


76000238 - 78.7"

Diffuser B Slide
opal




89000116

Diffuser C Click 1000
transparent



89000138

Diffuser C Click 1000
opal



89000538S


Diffuser C Click 20m
(65.62') reel / pack
opal

Job Name/Date:

Fixture Type Designation:


ACCESSORIES

Connectors

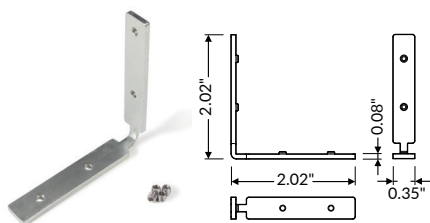


V5999519S

Connector Q9¹ 90° Bent
Zinc Coated Steel

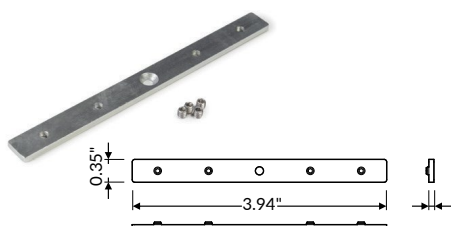


V5999819S

Connector Q9² 180°
Zinc Coated Steel

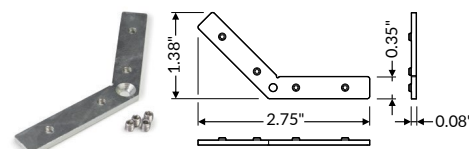


V5999719S

Connector Q9³ 135°
Zinc Coated Steel

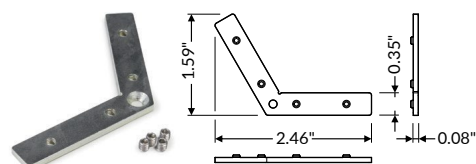


V5999619S

Connector Q9⁴ 120°
Zinc Coated Steel

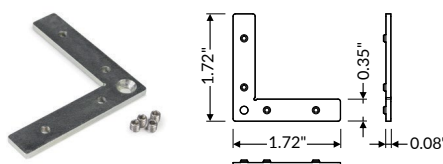


V5999419S

Connector Q9⁵ 90°
Zinc Coated Steel

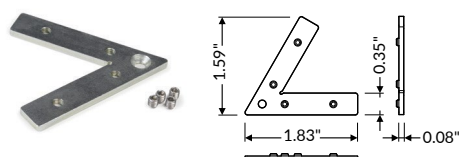

V5999319S

Connector Q9⁶ 60°
Zinc Coated Steel

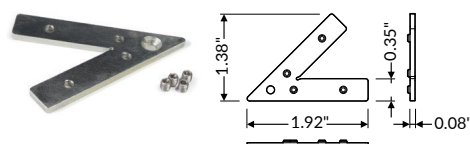

V5999219S

Connector Q9⁷ 45°
Zinc Coated Steel

Job Name/Date:

Fixture Type Designation: