

SMOOTH 12


Smooth 12 is a plaster-in LED linear profile that creates atmospheric light with the element of invisibility great for accentuating a room outline. With a body made of aluminum, it is available in 4 lengths, 39.4", 78.7", 118.1", or 159.5" and a raw aluminum finish.

TECHNICAL DATA

Wattage	18W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum
CCT	2700K, 3000K, 4000K
CRI	85
Delivered Lumens	2034 lm per 3.28 feet (3000K)
Efficacy	113 lm/W
Optics	LED Tape, Field Cuttable (See page 2)
Finish	Raw Aluminum
Fixture Dimensions	Length: 39.37", 78.74", 118.11" or 159.45" Max LED Width: 0.47"
IP Rating	IP20




Fixture Dimensions

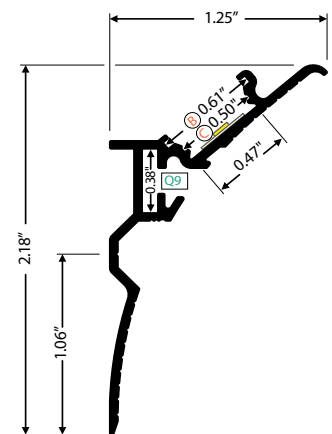

ORDERING INFORMATION

Example: J2000200.US. LED Tape / Accessories ordered separately.

J2		00	.US
Model No.	Length	Finish	
J2	0001 - 39.37" 0002 - 78.74" 0003 - 118.11" 0004 - 159.45"	00 - Raw Aluminum	.US

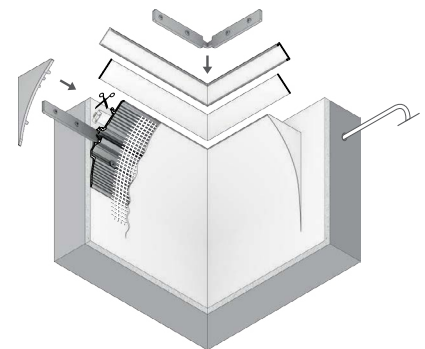


Job Name/Date:

Fixture Type Designation:

LED TAPE

24VDC - Field Cuttable



PPLL00622 – 2700K

PPLL00623 – 3000K

PPLL00624 – 4000K

16.40' l x 0.4" w

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00690	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-1
PPLT00691	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-2
PPLT00709	ELV / TRIAC & 0-10V to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-4
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00530	L3D0E / L3D03W	L3D0	100% to 0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ or 3-Wire LED F2B Driver	120-277VAC to 24VDC, 96W, Class 2	1-4



For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

ACCESSORIES


End Caps / Diffusers




H9999922
End Cap
gray




76000116 - 39.4"
76000216 - 78.7"
Diffuser B Slide
transparent




76000139 - 39.4"
76000239 - 78.7"
76000339 - 118.1"
Diffuser B Slide
frosted



76000138 - 39.4"
76000238 - 78.7"
Diffuser B Slide
opal



89000116
Diffuser C Click 1000
transparent



89000138
Diffuser C Click 1000
opal




89000538S
Diffuser C Click 20m
(65.62') reel / pack
opal

Job Name/Date:


Fixture Type Designation:

ACCESSORIES


Connectors

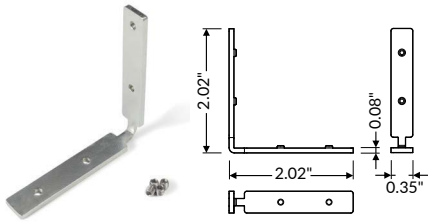


V5999519S
Connector Q9¹ 90° Bent
Zinc Coated Steel

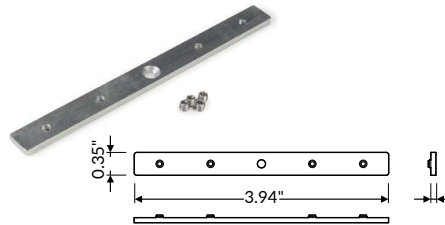


V5999819S
Connector Q9² 180°
Zinc Coated Steel

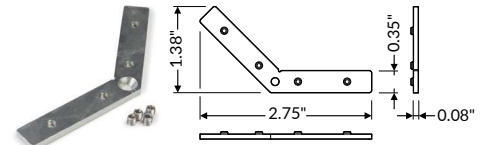


V5999719S
Connector Q9³ 135°
Zinc Coated Steel

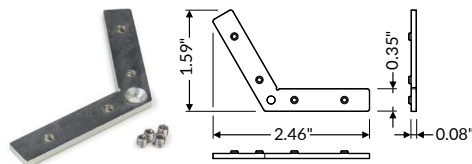


V5999619S
Connector Q9⁴ 120°
Zinc Coated Steel

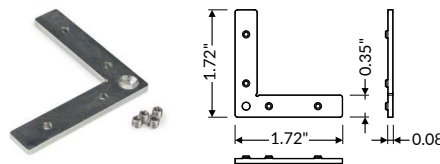

V5999419S
Connector Q9⁵ 90°
Zinc Coated Steel

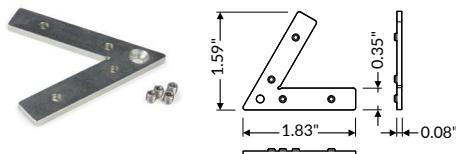

V5999319S
Connector Q9⁶ 60°
Zinc Coated Steel

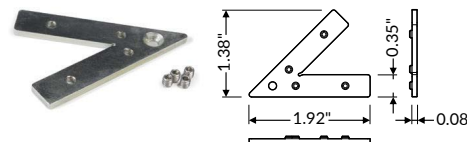

V5999219S
Connector Q9⁷ 45°
Zinc Coated Steel

Job Name/Date:

Fixture Type Designation: