


Kazoo is a bollard with a tubular head on a stem that is suitable for outdoor installation. It is available in static white, dim to warm or RGBW in 3 heights, 3 optics options and 4 standard finishes. Static white and dim to warm are constant current. RGBW is constant voltage. It can be mounted with anchor bolts or a spike.



## TECHNICAL DATA

|                           |  |
|---------------------------|--|
| <b>Wattage</b>            | Static White - 9W (350mA)<br>Dim to Warm - 6W (350mA)<br>RGBW w/ Integrated DMX - 5W (24VDC) |
| <b>Power Supply</b>       | Remote, not included, see page 2   |
| <b>Construction</b>       | Body: Aluminum   |
| <b>CCT</b>                | Static White (2700K, 3000K, 3500K, 4000K)<br>Dim to Warm (1800K-3000K)<br>RGBW               |
| <b>CRI</b>                | 90   |
| <b>Delivered Lumens</b>   | Coming Soon  |
| <b>Efficacy</b>           | Coming Soon  |
| <b>Optics</b>             | Diffuse  |
| <b>LED Source</b>         | BRIDGELUX COB (Static White & Dim to Warm)<br>CREE LED (RGBW)                                |
| <b>Finishes</b>           | 4 Standard, Custom RAL on request  |
| <b>Fixture Dimensions</b> | Height: 24.0", 30.0" or 36.0"<br>Head: Ø2.0 x 4.5"   |
| <b>IP Rating</b>          | IP65   |

Fixture Dimensions

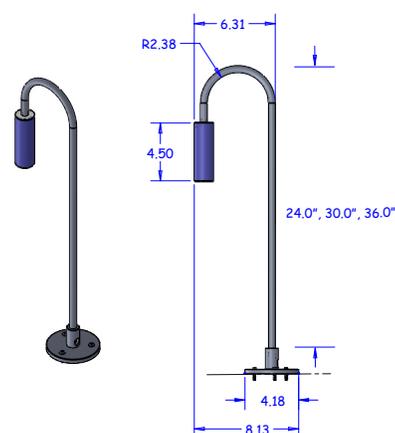

## ORDERING INFORMATION

Example: KAZ-L-6-30-96-35-R-0 . Accessories / Power Supplies ordered separately.

| KAZ-L   | -        | -                             | -                       | -        | -  | R        | - | 0 |
|---------|----------|-------------------------------|-------------------------|----------|--|----------|---|---|
| Model # | Height   | CCT                           | Finish                  | Optics   | Dimming  | Options  |   |   |
| KAZ-L   | 24 - 24" | 27 - 2700K                    | 11 - White Suede        | 25 - 25° | R - Remote Driver<br>(Static White, Dim to Warm, RGBW) | 0 - None |   |   |
|         | 30 - 30" | 30 - 3000K                    | 97 - Black Anodized     | 35 - 35° |  |          |   |   |
|         | 36 - 36" | 35 - 3500K                    | 96 - Silver Anodized    | 60 - 60° |  |          |   |   |
|         |          | 40 - 4000K                    | PN - Polished<br>Nickel |          |  |          |   |   |
|         |          | RG - RGBW<br>DW - Dim to Warm | C - Custom              |          |  |          |   |   |

See page 2  
for remote power  
supply options

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

Static White - 350mA

| Part Number                 | Description  | Input/Output                            | # of Fixtures |
|-----------------------------|--|---|---------------|
| <a href="#">PPLT00211</a>   | Non-Dim  | 120VAC to 350mA, 10W, Class 2           | 1-1           |
| <a href="#">PPLT00468</a>   | Phase Dim (120V only)                              | 120VAC to 350mA, 14W, Class 2           | 1-1           |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 20W, Class 2, DAMP | 1-1           |
| <a href="#">PPLT00263</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 350mA, 32W, Class 2       | 1-1           |
| <a href="#">PPLT00168-P</a> | 0-10V Dimming to 1.0% (2 channels)                 | 120-277VAC to 350mA, 50W, Class 2       | 1-2           |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 350mA, 100W, Class 2      | 1-1           |

Suggested Lutron Compatible - Static White - 350mA

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 1-1           |

Dim to Warm - 350mA

| Part Number                 | Description  | Input/Output                            | # of Fixtures |
|-----------------------------|--|---|---------------|
| <a href="#">PPLT00211</a>   | Non-Dim  | 120VAC to 350mA, 10W, Class 2           | 1-1           |
| <a href="#">PPLT00466-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 10W, Class 2, DAMP | 1-1           |
| <a href="#">PPLT00468</a>   | Phase Dim (120V only)                              | 120VAC to 350mA, 14W, Class 2           | 1-2           |
| <a href="#">PPLT00263</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 350mA, 32W, Class 2       | 2-2           |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 50W, Class 2, DAMP | 1-2           |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 350mA, 100W, Class 2      | 1-3           |

Suggested Lutron Compatible - Dim to Warm - 350mA

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| <a href="#">PPLT00247</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 7W, Class 2  | 1-1           |
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 2-2           |

RGBW with integrated DMX - 24VDC Remote Driver

| Part Number               | Description   | Input/Output                             | # of Fixtures |
|---------------------------|---|--|---------------|
| <a href="#">PPLT00149</a> | Non-Dim   | 120VAC to 24VDC, 10W, Class 2, IP65      | 1-1           |
| <a href="#">PPLT00632</a> | 0-10V Dimming (Dim to Off)                              | 120-277VAC to 24VDC, 12W, Class 2        | 1-1           |
| <a href="#">PPLT00690</a> | ELV / TRIAC & 0-10V Dimming                             | 120-277VAC to 24VDC, 40W, Class 2, IP67  | 1-6           |
| <a href="#">PPLT00709</a> | ELV / TRIAC & 0-10V Dimming                             | 120-277VAC to 24VDC, 96W, Class 2, DAMP  | 1-15          |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F Cold Weather Start) | 120-277VAC to 24VDC, 100W, Class 2       | 2-16          |
| <a href="#">PPLT00284</a> | Non-Dim   | 120-277VAC to 24VDC, 100W, Class 2, DAMP | 1-16          |

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

Installation



**AM-00018**  
Concrete Pour Anchor  
*Included in price*



**AM-00023**  
Spike Assembly  
(Set of 3)  
*Included in price*

## PHOTOMETRIC DATA

*Coming Soon*

*Job Name/Date:*

*Fixture Type Designation:*