

Zia is a round, surface mounted luminaire with a shallow cover for installation on walls or ceilings. It is IP65 wet label rated and available in static white (integral or remote driver) tunable white (remote driver), and RGBW with an integral DMX control and driver. The ring can be painted in a contrasting color for visual effect.


TECHNICAL DATA

Wattage / Input	13W
Power Supply	Integral or Remote Lutron (Static White) Integral DMX 120-277VAC (RGBW) Remote Driver 500mA (Tunable White)
Dimming	0-10V Dimming (RGBW is DMX)
Construction	Body: Extruded Aluminum Lens: Acrylic
CCT	2700K, 3000K, 3500K, 4000K, RGBW, Tunable White (2700K-6500K)
CRI	>90
Delivered Lumens	1240 lm (3000K)
Efficacy	95.4 lm/W
Finishes	5 Standard, Custom RAL on request
Fixture Dimensions	Ø8.34" x 2.95"
Aperature	Ø6.58"
Fixture Weight	2.0 lbs
LED Source	Mid Power LED
IP Rating	IP65



MADE IN THE U.S.A.
ADA Compliant

Fixture Dimensions

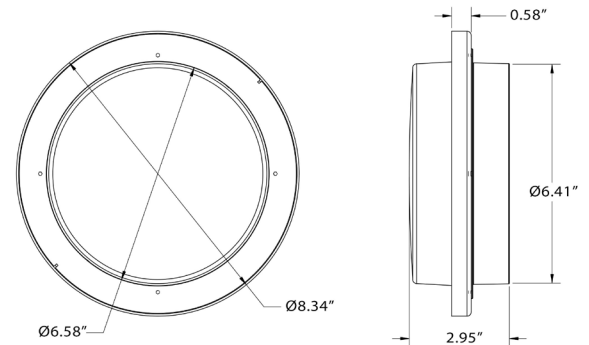

ORDERING INFORMATION

Example: ZIA-L-35-1-11-22-X-C-0.

ZIA-L	-		-	1	-		-		-	X	-		-	0
-------	---	--	---	---	---	--	---	--	---	---	---	--	---	---

Model #	CCT	Body	Body Finish	Ring Finish	Lens	Dimming	Options
ZIA-L	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K RW - RGBW TW - Tunable White (2700K-6500K)	1 - Surface Mounted	11 - White Suede 02 - Black Suede 03 - Gray 18 - Tex. Bronze TS - Silver C - Custom	SC - same color as body 11 - White Suede 02 - Black Suede 03 - Gray 22 - Orange 66 - Yellow 33 - Red 44 - Blue C - Custom	X - Opal	C - 120-277VAC 0-10V Dimming Integral (static white) L - Lutron Dimming Remote Driver (Static White) X - Integral DMX Control and Driver (RGBW) R - Remote Driver (Tunable White)	0 - None

See page 2
for remote
power supply
options

Job Name/Date:

Fixture Type Designation:

RING FINISH COLORS



Yellow (gloss)



Orange (gloss)



Red (gloss)



Blue (gloss)



Black Suede (matte)



White Suede (matte)

SUGGESTED POWER SUPPLIES

Tunable White - Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00548-P	0-10V Dimming (to 10%)	120-277VAC to (500mA), 50W, Class 2	1-2

Static White - Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	2-2
PPLT00250	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 500mA, 27W, Class 2	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: all photometric data is 3000K

Maximum Candela = 324.9

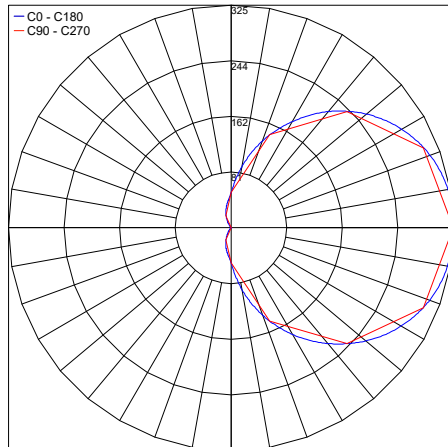

PHOTOMETRIC FILENAME : ZIA-L3011122XC0.IES

Job Name/Date:

Fixture Type Designation: