


BAJA PR-300 R



BAJA is a rectangular, multi-function outdoor luminaire made of stainless steel that is available as a floodlight with adjustable bracket rotating 90° or ceiling-mounted. BAJA PR-300 R is floodlight version with adjustable bracket, 11.8" in length, offering 6 optics options, 3 color temperatures, and 3 standard Hard Coat Treatment finishes.

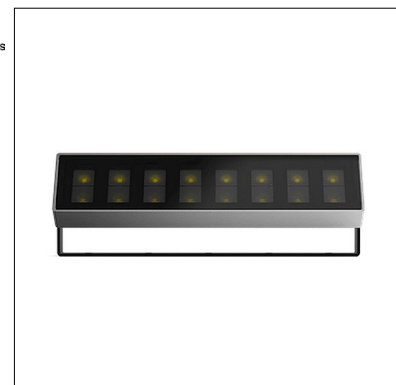

TECHNICAL DATA

Wattage	28W
Power Supply	Remote 500mA, not included. See page 2
Construction	Body/Frame: AISI 316L Stainless Steel Lens: 0.16" Thick Extra-clear Black Silk-Screened Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B3-U1-G0 (10°, 45°, Asym Narrow - 3000K) B2-U1-G0 (10°x45°, 70° - 3000K)
CRI	>80
Delivered Lumens	3600 lm (3000K)
Efficacy	128.6 lm/W (3000K)
Optics	10°, 10°x 45°, 45°, 70°, Asymmetric Wide, Asymmetric Narrow
Lumen Maintenance	L80 / B10 @100.000h Ta=25°C
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	11.81" l x 3.94" h Head: 11.81" l x 2.76" h x 1.26" w
IP Rating	IP65
Impact Resistance	IK08
Warranty	2 Years Extendable to 5 Years

Fixture Dimensions



Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION

Example: SPT9026037B.US. Power Supplies ordered separately.

SPT90260				.US
Model No.	CCT	Optics	Finishes	
SPT90260	2 - 2700K 3 - 3000K 4 - 4000K	1 - 10° 2 - 10x45° 4 - 45° 7 - 70° 8 - Asymmetric Wide 9 - Asymmetric Narrow	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA


Part Number	Description	Input/Output	# of Fixtures
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-1
PPLT00561-P500	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-1

For other power supply options consult factory.

PHOTOMETRIC DATA


NOTE: All photometry is 3000K

Maximum Candela = 38475.3

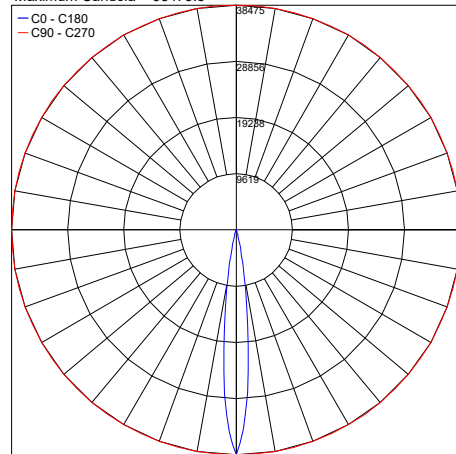


PHOTOMETRIC FILENAME : BAJA PR-300 R 30K 10° - PT9026031N.IES

Maximum Candela = 7616.2

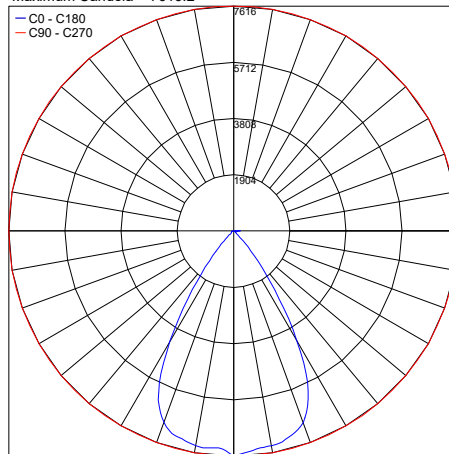


PHOTOMETRIC FILENAME : BAJA PR-300 R 30K 10x45° - PT9026032N.IES

Maximum Candela = 7337.3

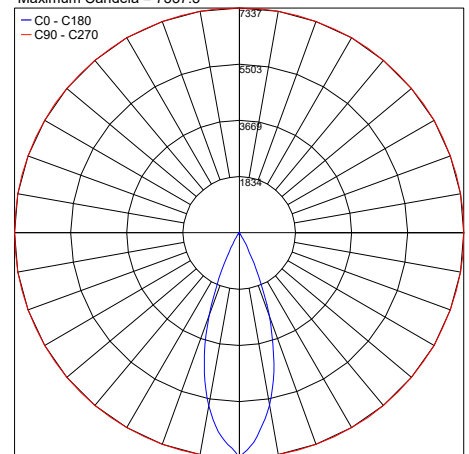


PHOTOMETRIC FILENAME : BAJA PR-300 R 30K 45° - PT9026034N.IES

Maximum Candela = 1389.6

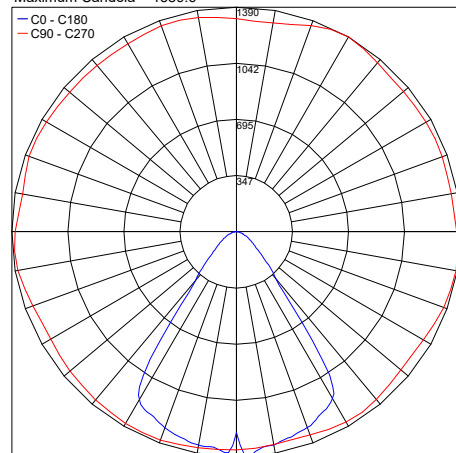


PHOTOMETRIC FILENAME : BAJA PR-300 R 30K 70° - PT9026037N.IES

Maximum Candela = 38257.7

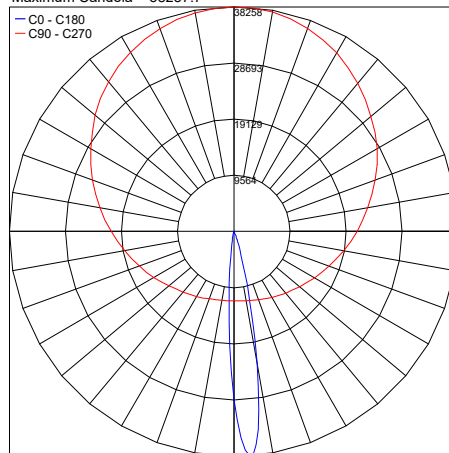

PHOTOMETRIC FILENAME : BAJA PR-300 R 30K ASYM NARROW - PT9026039N.IES

Maximum Candela = 7517.6

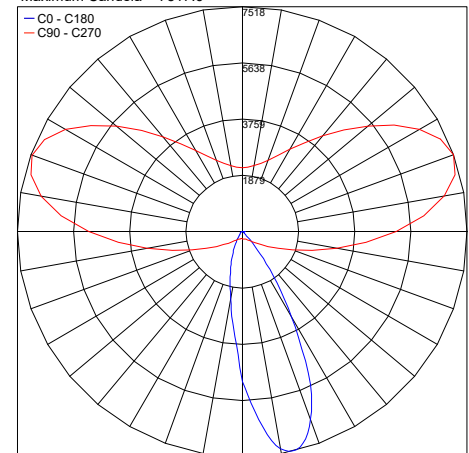

PHOTOMETRIC FILENAME : BAJA PR-300 R 30K ASYM WIDE - PT9026038N.IES

Job Name/Date:

Fixture Type Designation: