


# BAJA PR-300 R



BAJA is a rectangular, multi-function outdoor luminaire made of stainless steel that is available as a floodlight with adjustable bracket rotating 90° or ceiling-mounted. BAJA PR-300 R is floodlight version with adjustable bracket, 11.8" in length, offering 6 optics options, 4 color temperatures, and 3 standard Hard Coat Treatment finishes.

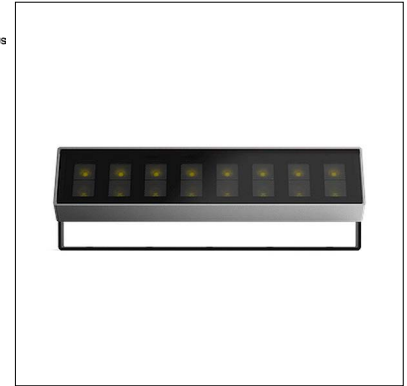

## TECHNICAL DATA

<b>Wattage</b>	28W
<b>Power Supply</b>	Remote 500mA, not included. See page 2
<b>Construction</b>	Body/Frame: AISI 316L Stainless Steel Lens: 0.16" Thick Extra-clear Black Silk-Screened Tempered Glass
<b>CCT</b>	2200K, 2700K, 3000K, 4000K
<b>BUG Rating</b>	B3-U1-G0 (10°, 45°, Asym Narrow - 3000K) B2-U1-G0 (10°x45°, 70° - 3000K)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	3600 lm (3000K)
<b>Efficacy</b>	128.6 lm/W (3000K)
<b>Optics</b>	10°, 10°x 45°, 45°, 70°, Asymmetric Wide, Asymmetric Narrow
<b>Lumen Maintenance</b>	L80 / B10 @100.000h Ta=25°C
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	11.81" l x 3.94" h Head: 11.81" l x 2.76" h x 1.26" w
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08
<b>Warranty</b>	2 Years Extendable to 5 Years

Fixture Dimensions

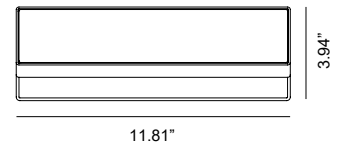

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT9026037B.US. Power Supplies ordered separately.

SPT90260				.US
Model No.	CCT	Optics	Finishes	
SPT90260	1 - 2200K 2 - 2700K 3 - 3000K 4 - 4000K	1 - 10° 2 - 10x45° 4 - 45° 7 - 70° 8 - Asymmetric Wide 9 - Asymmetric Narrow	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00561-P500</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-1

For other power supply options consult factory.

## PHOTOMETRIC DATA

NOTE: All photometry is 3000K

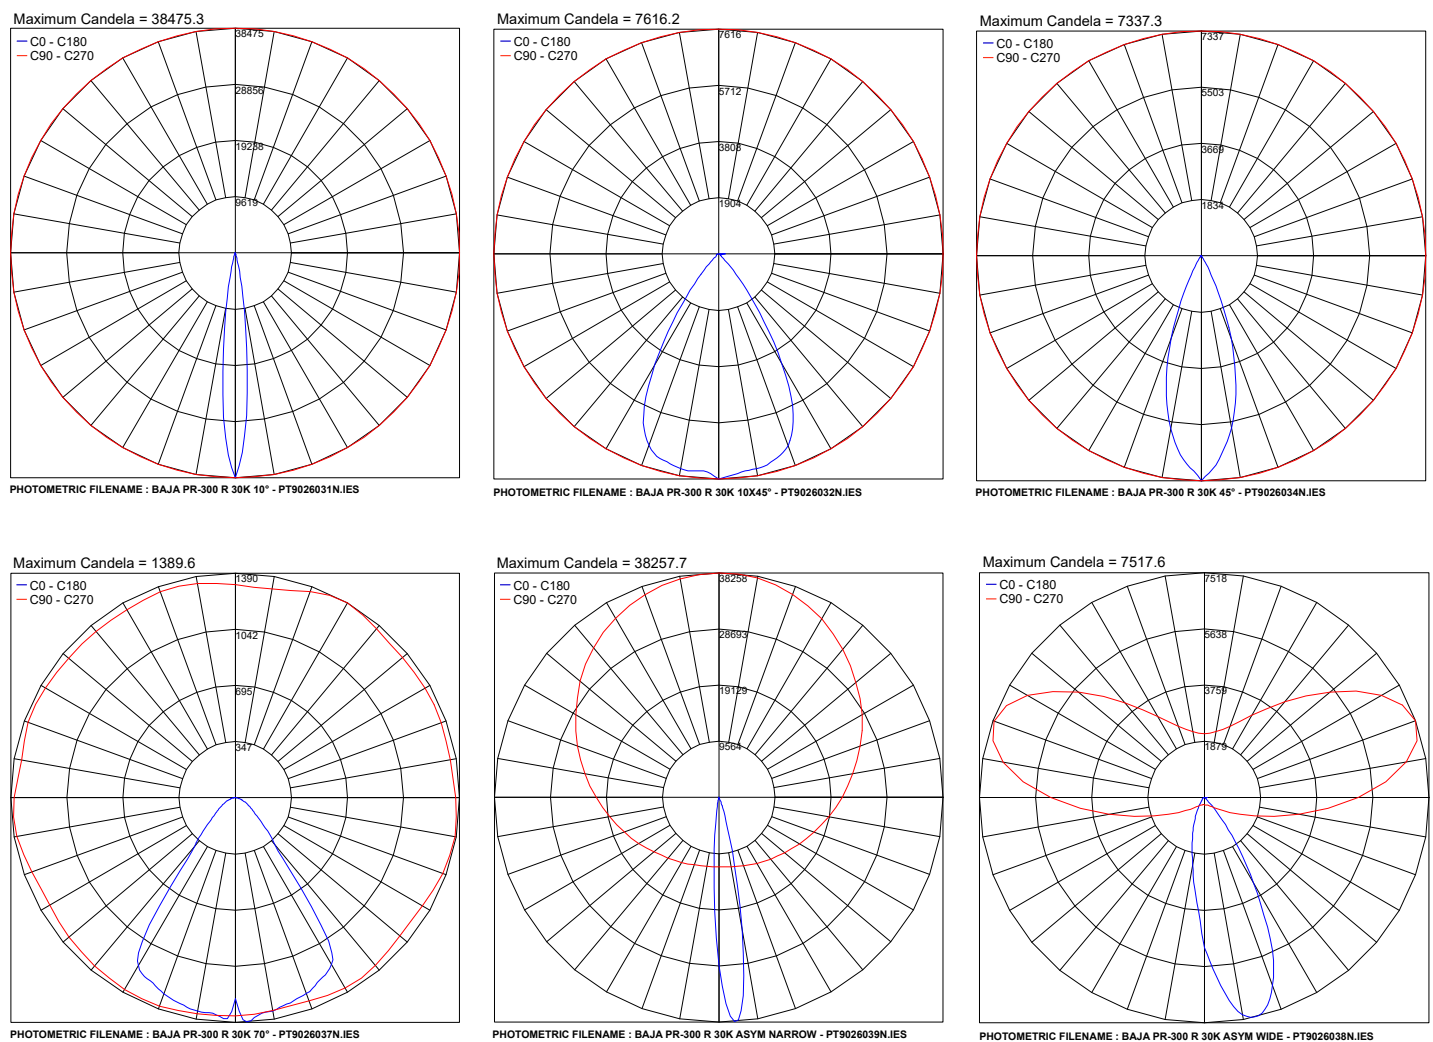

Job Name/Date:

Fixture Type Designation: