



BAJA New

C
160
300

C R
160
300

PR
160
300

PR R
160
300

designplan® 


79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

← BAJA PR160, INOX NATURAL, 2700K



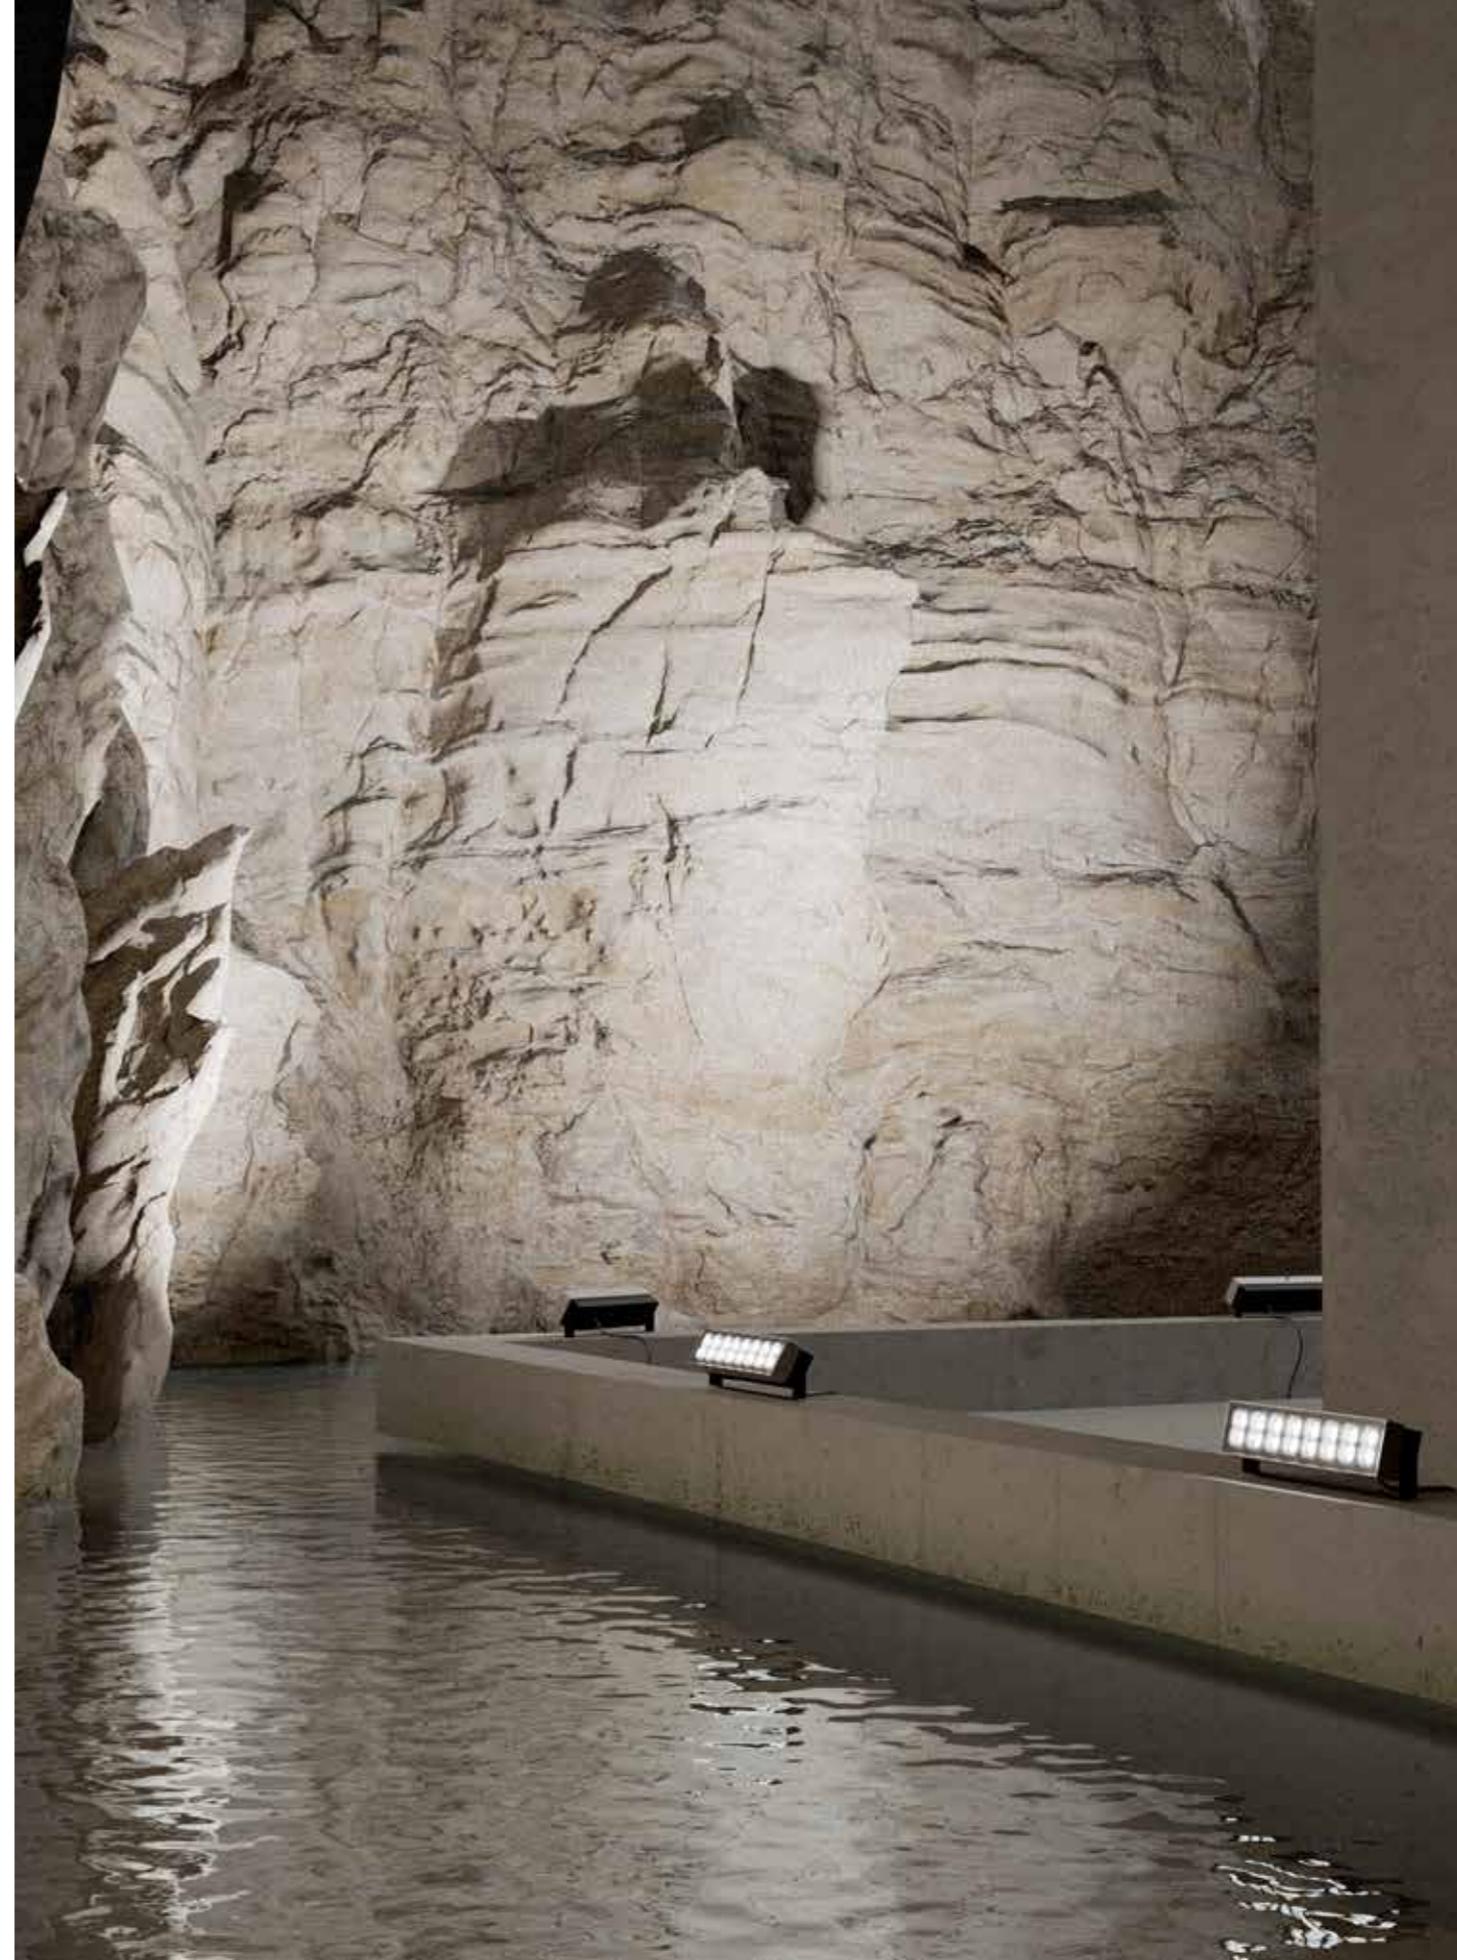

BAJA PR160, INOX NATURAL ↑
BAJA PR300, INOX NATURAL, 4000K →



← BAJA C-300 R, INOX NATURAL, 3000K



Graduated ring nut for swiveling





Graduated ring nut detail



Swivel bracket for installation on the surface

Multi-function lighting fixture made of AISI 316L stainless steel. Available in the following versions: ceiling-mounted with remote and integrated power supply, projector with adjustable bracket rotating 90° on an axis with remote and integrated power supply. Extra-clear black silk-screened tempered glass, 4 mm thick. Optics include roto-sym-metric lenses of 10°, 45°, and 70°, 10°x45°, asymmetric lenses with color temperatures of 2700K, 3000K, and 4000K. Surface finish HCT available in three versions.



C




C-R



PR



PR-R



C160

Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S.



Info	Temperature	2700 K (1746 lm) / 3000 K (1800 lm) / 4000 K (1920 lm)
	Power	LED 14 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	-


C160 R

Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S.




Info	Temperature	2700 K (1746 lm) / 3000 K (1800 lm) / 4000 K (1920 lm)
	Power	LED 14 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	D2, D3, X2

Accessories D2 D3 X2



C300

Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S.

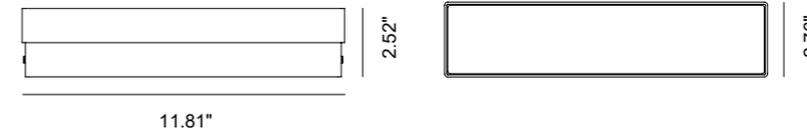

Info	Temperature	2700 K (3492 lm) / 3000 K (3600 lm) / 4000 K (3840 lm)
	Power	LED 28 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	-

C300 R

Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S.



Info	Temperature	2700 K (3492 lm) / 3000 K (3600 lm) / 4000 K (3840 lm)
	Power	LED 28 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	D2, D3, X3



Accessories D2 D3 X3





PR160



Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S



Info	Temperature	2700 K (1746 lm) / 3000 K (1800 lm) / 4000 K (1920 lm)
	Power	LED 14 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	-

PR160R

Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S




Info	Temperature	2700 K (1746 lm) / 3000 K (1800 lm) / 4000 K (1920 lm)
	Power	LED 14 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	D2, D3

Accessories D2 D3



PR300



Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S



Info	Temperature	2700 K (3492 lm) / 3000 K (3600 lm) / 4000 K (3840 lm)
	Power	LED 28 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	-


PR300R

Emission 10° / 45° / 70° / 10° × 45° / Asym. L / Asym. S

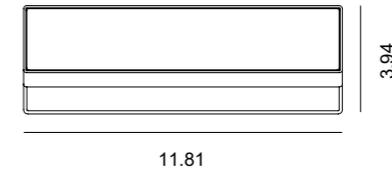

Info	Temperature	2700 K (3492 lm) / 3000 K (3600 lm) / 4000 K (3840 lm)
	Power	LED 28 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP65, DALI
	Accessories	D2, D3

Accessories D2 D3





Lighting up cities. Lighting up a city means bringing it to life even when the sun goes down. Lighting up cities means drawing new perspectives in the dark, transforming squares, streets and monuments into vibrant scenes. Light guides, protects and narrates, creates cosy and safe spaces. Every street-light illuminates a story, every beam lights up encounters. Every post, every flange, every lamp body is made of AISI 316L stainless steel, to illuminate for a long time, from dusk to dawn.



is the USA STRAL's official dealer

79 Trenton Avenue
Frenchtown, NJ

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042