

TECHNICAL CATALOGUE 2024

designplan® 

STRAL

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

BAJA



Inox Natural



Inox Graphite




Inox Bronze



CRI>80

IP65

IK09

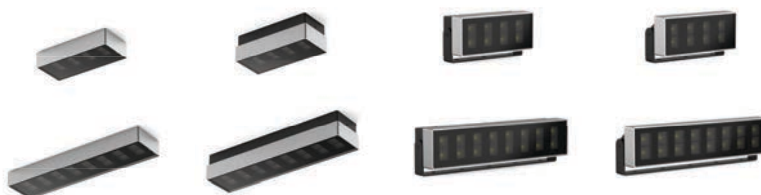

Multi-function lighting fixture made of AISI 316L stainless steel. Available in the following versions: ceiling-mounted with remote and integrated power supply, projector with adjustable bracket rotating 90° on an axis with remote and integrated power supply. Extra-clear black silk-screened tempered glass, 0.16" thick. Optics include roto-symmetric lenses of 10°, 45°, and 70°, 10°x45°, asymmetric lenses with color temperatures of 2700K, 3000K, and 4000K. Surface finish HCT available in three versions.





Emission




10°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		

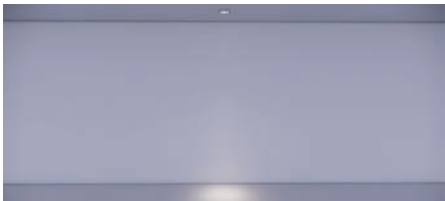


45°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




70°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




10° x 45°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




Asym. L

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		



Asym. S

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




Accessories

IP65 IK09 lm




PLASTER PLATE

PT70007





Emission





Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W





Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W






Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W





Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W

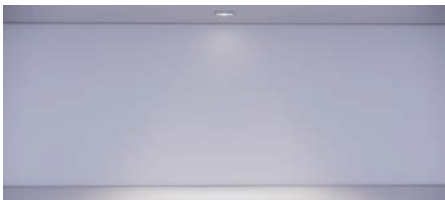


Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W



Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W





Accessories

IP65 IK09 lm




PLASTER PLATE

PT70008





Emission






Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm

Power		
14 W		





Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm

Power		
14 W		

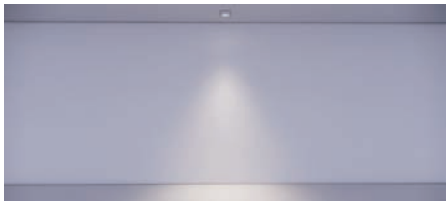



Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm

Power		
14 W		





Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm

Power		
14 W		




Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm

Power		
14 W		




Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm


Power		
14 W		



IP65 IK09 lm


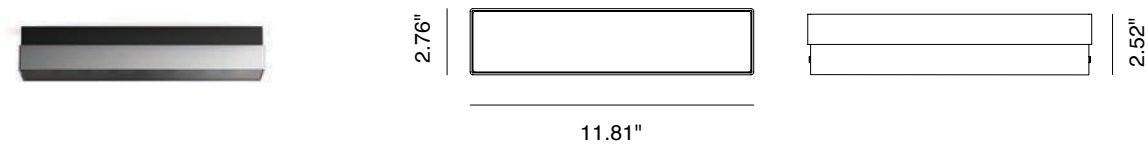


Emission






Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W





Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W

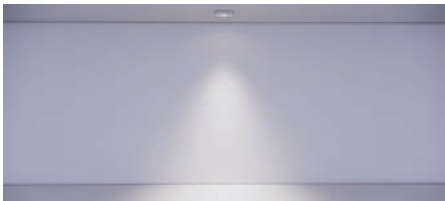



Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W





Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W




Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W




Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power
28 W




IP65 IK09 lm

BAJA PR-160 R



6.30"





Emission




10°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




45°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




70°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




10° x 45°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




Asym. L

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




Asym. S

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




Accessories

IP65 IK09 lm



11.81"




Emission




10°

Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm
Power		
28 W		




45°

Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm
Power		
28 W		




70°

Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm
Power		
28 W		




10° x 45°

Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm
Power		
28 W		




Asym. L

Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm
Power		
28 W		




Asym. S

Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm
Power		
28 W		




Accessories

IP65 IK09 lm



6.30"




Emission





10°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




45°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




70°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




10° x 45°

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		




Asym. L

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		





Asym. S

Color		
2700 K	3000 K	4000 K
1746 lm	1800 lm	1920 lm
Power		
14 W		



IP65 IK09 lm





Emission





Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power		
28 W		





Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power		
28 W		




Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power		
28 W		




Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power		
28 W		




Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power		
28 W		



Color		
2700 K	3000 K	4000 K
3492 lm	3600 lm	3840 lm

Power		
28 W		



IP65 IK09 lm