



BULTJIE New

R

50  
70

S

50  
70

designplan® 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)


Tel: (908) 996-7710  
Fax: (908) 996-7042

← BULTJIE S70, INOX NATURAL, 3000K





↑ BULTJIE R70, INOX NATURAL  
← BULTJIE R70, INOX NATURAL, 4000K

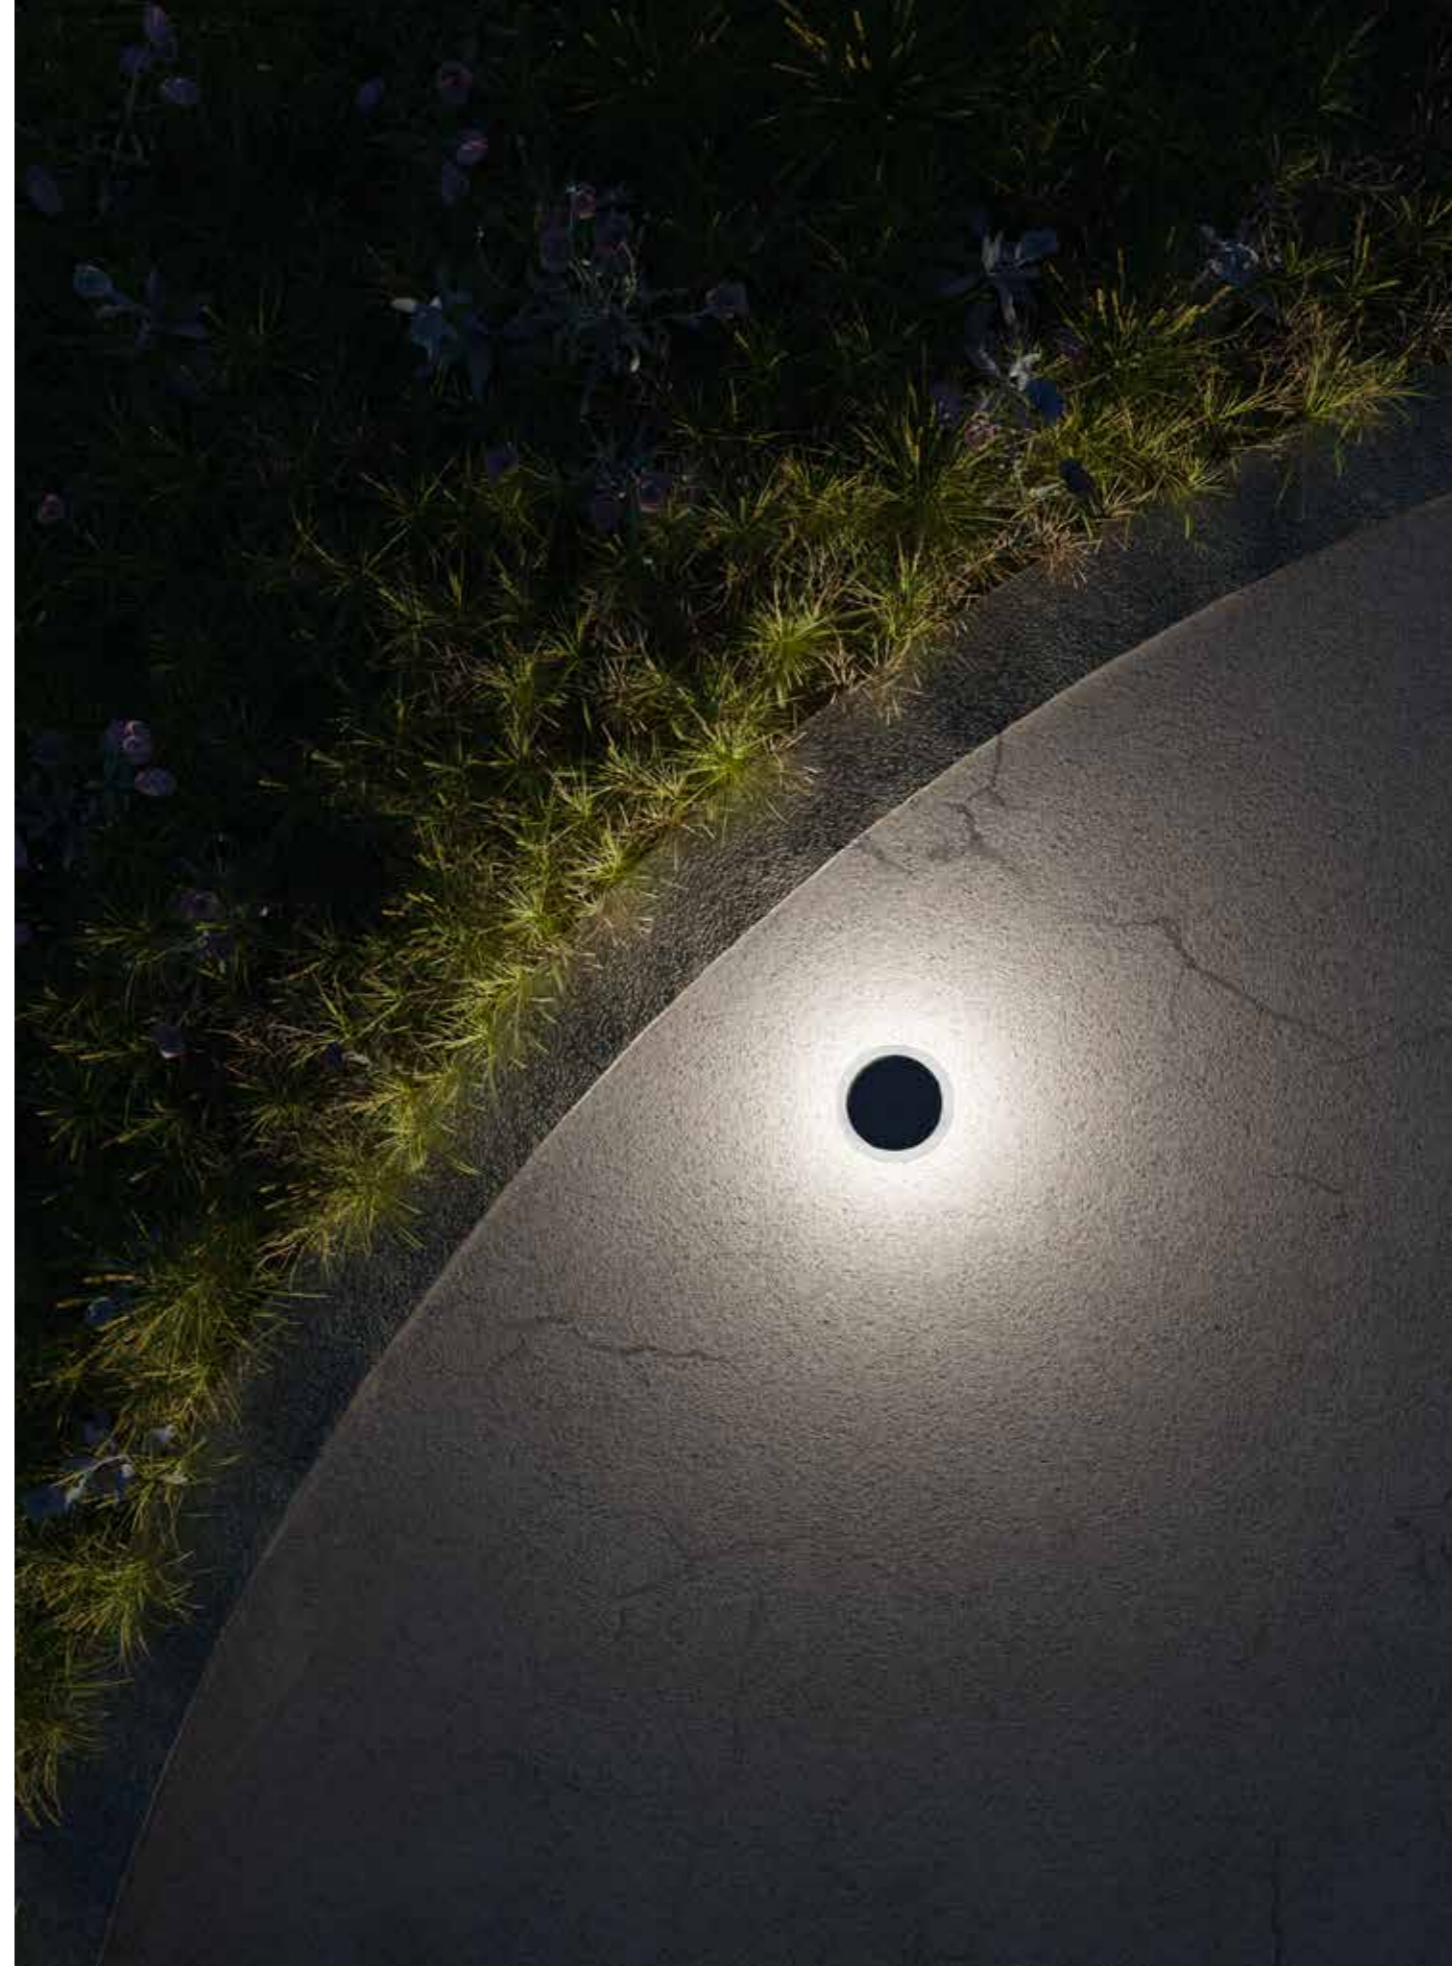

BULTJIE

BULTJIE R70, INOX NATURAL, 3000K ↕ →



IP67 Protection rate



Cover in AISI 316L stainless steel




Diffuser in opaline plexiglass

Stainless steel AISI 316L wall and in-ground recessed lighting fixture. Including the part embedded in the ground, with square and circular frames. Ground-grazing illumination with shielding at 90°, 180°, 270°, 360° with color temperatures of 2700K, 3000K, and 4000K. Plexiglass diffuser. Installation via a recessed counter-casing. Walk-over safe. Formwork accessory available in two versions for in-ground or concrete installation, which can be accessorized with a bottom cap and plaster guard cap. Remote power supply. Surface finish HCT available in three variants.

# 50




# 70





## R50




2.76"

1.97"


Emission

Wide: 90° / 180° / 270° / 360°




Ø 1.97"

Info	Temperature	2700 K (463 lm) / 3000 K (445 lm) / 4000 K (554 lm)
	Power	LED 5 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI,  Walkable
	Accessories	C16, C17, T1, T2, T7, A1, D1

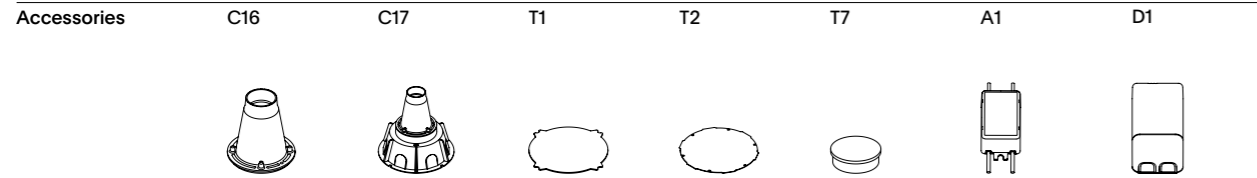

## S50




2.76"

1.97"


Emission

Wide: 90° / 180° / 270° / 360°




1.97"

Info	Temperature	2700 K (463 lm) / 3000 K (445 lm) / 4000 K (554 lm)
	Power	LED 5 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI,  Walkable
	Accessories	C16, C17, T1, T2, T7, A1, D1

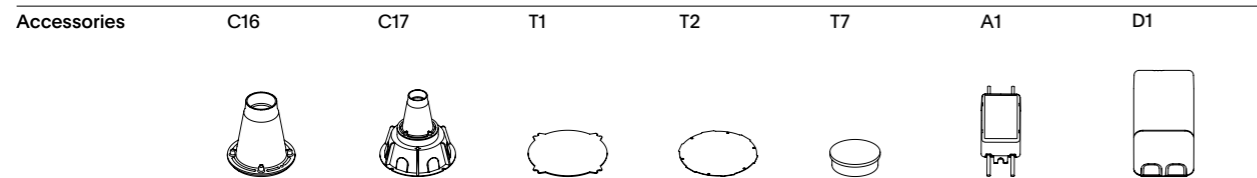

## R70



2.83"

2.76"


Emission

Wide: 90° / 180° / 270° / 360°




Ø 2.76"

Info	Temperature	2700 K (631 lm) / 3000 K (607 lm) / 4000 K (755 lm)
	Power	LED 7 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI,  Walkable
	Accessories	C18, C19, T1, T2, T8, A2, D1

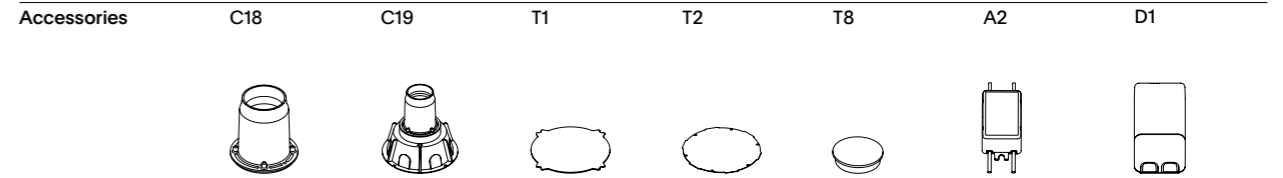

## S70




2.83"

2.76"


Emission

Wide: 90° / 180° / 270° / 360°



2.76"

Info	Temperature	2700 K (631 lm) / 3000 K (607 lm) / 4000 K (755 lm)
	Power	LED 7 W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI,  Walkable
	Accessories	C18, C19, T1, T2, T8, A2, D1

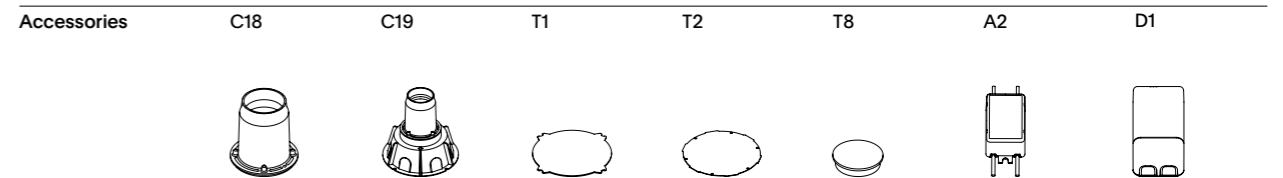



is the USA STRAL's official dealer

79 Trenton Avenue  
Frenchtown, NJ

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042