

TECHNICAL CATALOG 2024

designplan[®] 

STRAL

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
.....

BULTJIE



Inox Natural



Inox Graphite



Inox Bronze

CRI>80



IP66

IP67


IK09



EN Stainless steel AISI 316L wall and in-ground recessed lighting fixture. Including the part embedded in the ground, with square and circular frames. Ground-grazing illumination with shielding at 90°, 180°, 270°, 360° with color temperatures of 2700K, 3000K, and 4000K. Plexiglass diffuser. Installation via a recessed counter-casing. Walk-over safe. Casing as accessory available in two versions for in-ground or concrete installation, which can be accessorized with a bottom cap and plaster guard cap. Remote power supply. Surface finish HCT available in three variants.






Emission






Wide 90°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		

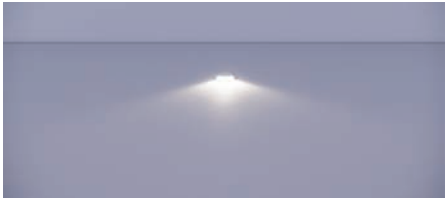




Wide 180°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		

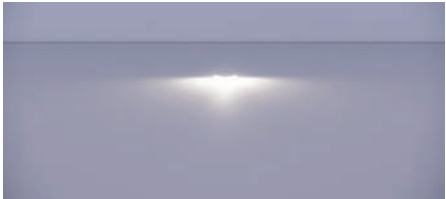


Wide 270°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		

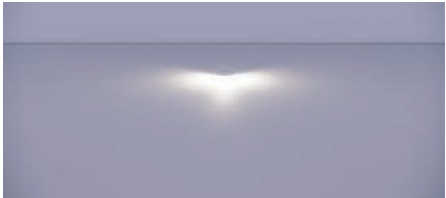


Wide 360°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		



Accessories


IP66 IP67 IK09 Im



BULTJIE CASING
F 1.97" H: 4.33"
PT51802



BOTTOM CAP
H: 4.72"
PT40004




BULTJIE CASING
F 1.97" H: 7.68"
PT51803




BOTTOM CAP
H: 7.68"
PT40003






BULTJIE 50
MORTAR CAP
PT40010

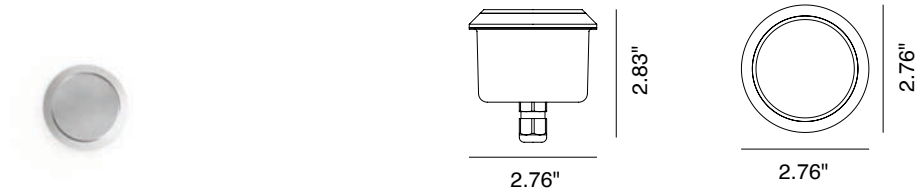




Emission




Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		

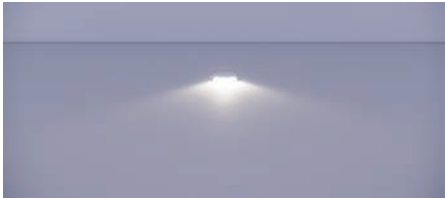


Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		

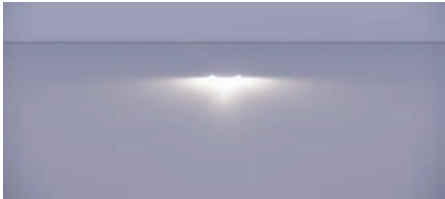

Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		




Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		



Accessories


IP66 IP67 IK09  lm



BULTJIE CASING
F 3.15" H: 4.33"
PT51902



BOTTOM CAP
H: 4.72"
PT40004





BULTJIE CASING
F 3.15" H: 7.68"
PT51903




BOTTOM CAP
H: 7.68"
PT40003



BULTJIE 70
MORTAR CAP
PT40011






Emission






Wide 90°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		

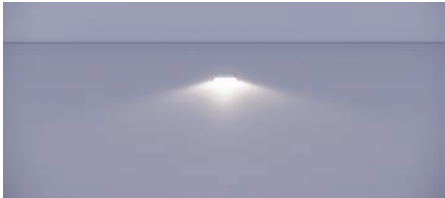



Wide 180°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		

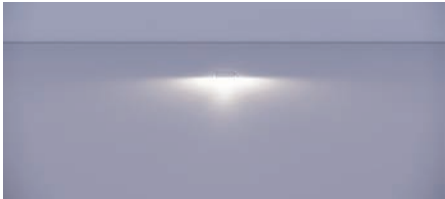


Wide 270°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		




Wide 360°

Color		
2700 K	3000 K	4000 K
463 lm	463 lm	554 lm
Power		
5 W		



Accessories


IP66 IP67 IK09 Im



BULTJIE CASING
F 1.97" H: 4.33"
PT51802



BOTTOM CAP
H: 4.72"
PT40004





BULTJIE CASING
F 1.97" H: 7.68"
PT51803




BOTTOM CAP
H: 7.68"
PT40003



BULTJIE 50
MORTAR CAP
PT40010






Emission






Wide 90°

Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		

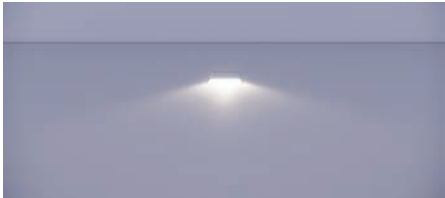



Wide 180°

Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		

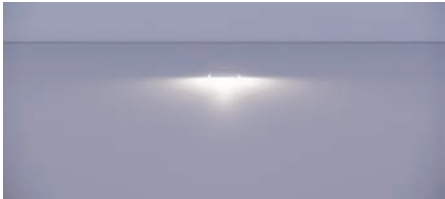


Wide 270°

Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		




Wide 360°

Color		
2700 K	3000 K	4000 K
631 lm	631 lm	755 lm
Power		
7 W		



Accessories


IP66 IP67 IK09 Im



BULTJIE CASING
F 3.15" H: 4.33"
PT51902



BOTTOM CAP
H: 4.72"
PT40004



BULTJIE CASING
F 3.15" H: 7.68"
PT51903



BOTTOM CAP
H: 7.68"
PT40003



BULTJIE 80
MORTAR CAP
PT40011