

NORMALL S IP20


Normall is a series of indirect recessed wall luminaires made of Calcyt® plaster that can be seamlessly installed in walls with a lamp at the top and at the bottom. They are available in an indoor and an outdoor / bathroom version with fixed optics and a variety of color temperatures. Normall S is the slim version at just 2.2 inches deep.



TECHNICAL DATA

Wattage	9.3W - Static White, 12.8W - WarmDim
Power Supply	Remote 350mA, not included. See page 2.
Construction	Body: CALCYT® Plaster Lens: Tempered Glass
CCT	2200K, 2700K, 3000K, WarmDim (3000K-2000K)
CRI	90
Delivered Lumens	424 lm (9.3W, 3000K) 355 lm (12.8W, WarmDim)
Efficacy	45.6 lm/W (9.3W, 3000K) 27.7 lm/W (12.8W, WarmDim)
Optics	Fixed 0° (Not Adjustable)
Finishes	CALCYT® Plaster - Fully Paintable
Fixture Dimensions	8.66" w x 14.76" h x 2.17" deep
Cut-out Dimension	8.86" w x 14.96" h
Color Consistency	2-Step MacAdam 4-Step MacAdam (WarmDim)
IP Rating	IP20

Fixture Dimensions

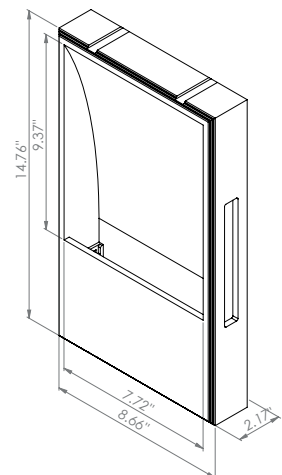

ORDERING INFORMATION

Example: 115 29 500. Accessories / Power Supplies ordered separately.

--	--

Model No.	Description
115 29 500 - 2200K (9.3W, 800 lm)	Remote 350mA Driver
115 29 000 - 2700K (9.3W, 800 lm)	Remote 350mA Driver
115 29 100 - 3000K (9.3W, 800 lm)	Remote 350mA Driver
115 29 600 - WarmDim (12.8W, 900 lm)	Remote 350mA Driver

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA - For 9.3W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00263	Leading / Trailing Edge Phase Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-1

Suggested Lutron Compatible 350mA - For 9.3W version

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

SUGGESTED POWER SUPPLIES

350mA - For 12.8W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00263	Leading / Trailing Edge Phase Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-1

Suggested Lutron Compatible 350mA - For 12.8W version

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

For other power supply options consult factory.

ACCESSORIES - Installation

704 01 000

Outer Casing

Job Name/Date:

Fixture Type Designation: