

NORMALL S IP20

INDOOR

Fix (not adjustable) 0° - 0°

8.86"×14.96"

Material : CALCYT® plaster

NORMALL & MEDIUM

NORMALL S LED WARMDIM 900LM 350mA

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 115 73 600 phase DIM

REF N° 115 63 600 DIM 0-10V

350mA/50Hz - 12.8W - parallel
wiring ∇ 0.2m 2 -
4 Step MacAdam - CRI 90 -

NORMALL S LED 800LM 350mA

REF N°	2200°K	2700°K	3000°K
phase DIM	115 71 500	115 71 000	115 71 100
DIM 0-10V	115 61 500	115 61 000	115 61 100

350mA/50Hz - 9.3W - parallel wiring ∇
0.2m 2 -
2 Step MacAdam - CRI 90 - R9=2.95"

NORMALL S LED 1000LM 350mA


REF N°	2700°K	3000°K	4000°K
phase DIM	115 72 000	115 72 100	115 72 200
DIM 0-10V	115 62 000	115 62 100	115 62 200

350mA/50Hz - 11W - parallel wiring ∇
0.2m 2 -
2 Step MacAdam - CRI 90 - R9=2.95"

NORMALL S LED 2000LM 350mA

REF N°	2700°K	3000°K	4000°K
phase DIM	115 74 000	115 74 100	115 74 200
DIM 0-10V	115 64 000	115 64 100	115 64 200

350mA/50Hz - 14.1W - parallel
wiring ∇ 0.2m 2 -
2 Step MacAdam - CRI 80

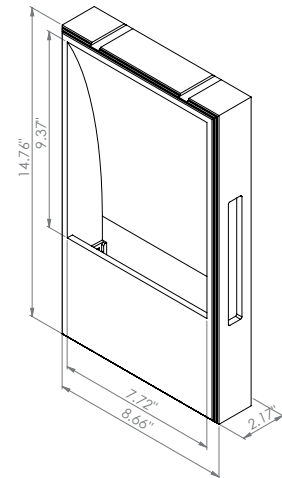

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT NORMALL S
REF N° 715 01 000 For mounting into gypsum walls

designplan®

BRICK IN THE WALL®
Invisible integration of light

