

OLY

N

New

60

New

80

110

180

240

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

← OLY 180, INOX BRONZE, 2700K





New

Honeycomb lens filter



New

Asymmetric lens filter





A4 stain-less steel flush screw



Exploded view of body structure



Ring nut in stainless steel AISI 316L Inox Bronze finish

Draining casing for ground recessed




AISI 316L stainless steel ring and lamp body. Optics include 6°, 10°, 21°, 45°, 60°, 65°, 10°x40° and asymmetric wall washer options with color temperatures of 2700K, 3000K, and 4000K, featuring GU10 socket for OLY N110. Stainless steel fixing screws. Snap-in casing installation for versions OLY N-60 and OLY N-80. Installation in the ground and/or on the floor using an embedded counter-casing. Honeycomb and asymmetric anti-glare filters for OLY N-110, OLY N-180, and OLY N-240. 0.31 inches thick extra-clear tempered glass. Casing as accessory for in-ground or concrete installation, accessorized with bottom cap (versions OLY N-60, OLY N-80, and OLY N-110) and plaster guard cap for all versions. Surface finish HCT available in three variants.

N60




N80

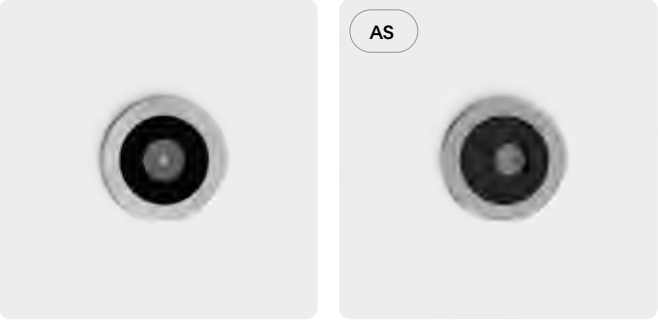

N110




N180

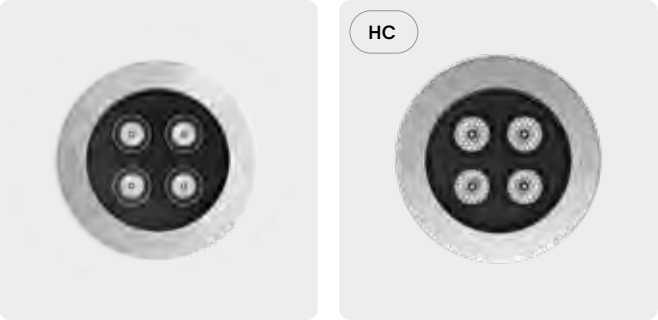

N240



N60



2.83"

2.36"



Ø 2.36"




Ø 2.36"

Info	Temperature	2700K (463 lm) / 3000K (445 lm) / 4000K (554 lm)		
	Power	LED 4W		
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze		
	Characteristics	IK09, IP66/67, DALI,  Walkable		
	Accessories	C1, C2, T1, T2, T3		

Accessories	C1	C2	T1	T2	T3
					

N80



2.91"

3.15"



Ø 3.15"




Ø 3.15"




Info	Temperature	2700K (631 lm) / 3000K (607 lm) / 4000K (755 lm)		
	Power	LED 6W		
	Finish	INOX Natural INOX Graphite INOX Bronze		
	Characteristics	IK09, IP66/67, DALI,  Walkable		
	Accessories	C3, C4, T1, T2, T4		

Accessories	C3	C4	T1	T2	T4
					

N110


 5.12" 4.33"			Ø 4.33"		Ø 4.33"		Ø 4.33"
	Info						
	Temperature	2700K (543 lm) / 3000K (550 lm) / 4000K (613 lm)					
	Power	LED 5W					
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze					
	Characteristics	IK09, IP66/67, DALI,  Walkable					
Accessories	C5, T9, T10						

N110 H

Info			Ø 4.33"		Ø 4.33"		Ø 4.33"
	Temperature	2700K (740 lm) / 3000K (750 lm) / 4000K (836 lm)					
	Power	LED 7W					
	Finish	INOX Natural INOX Graphite INOX Bronze					
	Characteristics	IK09, IP66/67, DALI,  Walkable					
	Accessories	C5, T9, T10					


Accessories	C5	T9	T10
			

N180

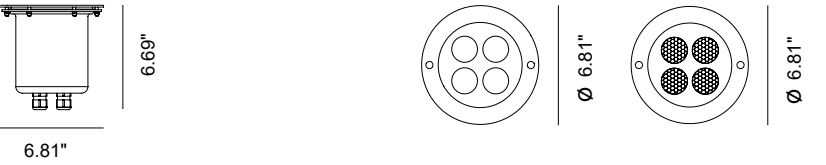


Info	Emission	21°/45°/65°	HC 21°/45°/65°
	Temperature	2700K (1522 lm) / 3000K (1540 lm) / 4000K (1717 lm)	
	Power	LED 12W	
	Finish	INOX Natural INOX Graphite INOX Bronze	
	Characteristics	IK09, IP66/67, DALI, Walkable	
Accessories		C6	


N180 H

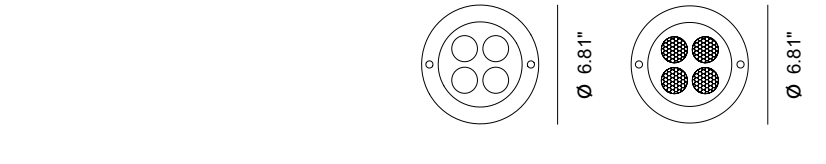


Info	Emission	21°/45°/65°	HC 21°/45°/65°
	Temperature	2700K (2174 lm) / 3000K (2200 lm) / 4000K (2453 lm)	
	Power	LED 18W	
	Finish	INOX Natural INOX Graphite INOX Bronze	
	Characteristics	IK09, IP66/67, DALI, Walkable	
Accessories		C6	



N240

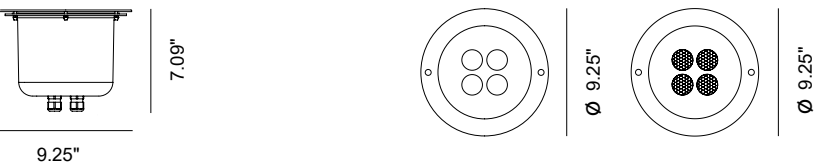

Info	Emission	21°/45°/65°	HC 21°/45°/65°
	Temperature	2700K (2964 lm) / 3000K (3000 lm) / 4000K (3345 lm)	
	Power	LED 24W	
	Finish	INOX Natural INOX Graphite INOX Bronze	
	Characteristics	IK09, IP66/67, DALI, Walkable	
Accessories		C7	





is the USA STRAL's official dealer

79 Trenton Avenue
Frenchtown, NJ

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042