


VLAK S-50



VLAK is a series of recessed wall or in-grade uplight made of stainless steel, including the in-ground embedded part, that comes in round or square version in 2 sizes. VLAK S-50 is the 2.0"x2.0" square 5W version offering 3 color temperatures.

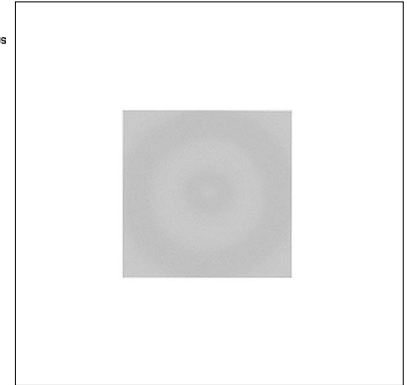

TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage | 5W |
| Power Supply | Remote 500mA, not included. See page 2 |
| Construction | Body/Frame: AISI 316L Stainless Steel Lens: Plexiglass |
| CCT | 2700K, 3000K, 4000K |
| CRI | 80 |
| Delivered Lumens | 445 lm (3000K) |
| Efficacy | 89 lm/W (3000K) |
| Optics | Wide |
| Lumen Maintenance | L80/B10 @100.000h Ta=25°C |
| Fixture Dimensions | 1.97" square x 2.76" h |
| IP Rating | IP66, IP67 |
| Impact Resistance | IK09 |
| Warranty | 2 Years Extendable to 5 Years |

Fixture Dimensions



ORDERING INFORMATION

Example: SPT3015024.US. Power Supplies / Accessories ordered separately.

| | | | |
|------------------|-------------------------------------|---------------|-----|
| SPT30150 | | 4 | .US |
| Model No. | CCT | Optics | |
| SPT30150 | 2 - 2700K 3 - 3000K 4 - 4000K | 4 - Wide | .US |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA


| Part Number | Description | Input/Output | # of Fixtures |
|--------------------------------|--|---|---------------|
| PPLT00469 | Phase Dim (120V only) | 120VAC to 500mA, 14W, Class 2 | 1-2 |
| PPLT00262 | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 500mA, 32W, Class 2 | 2-3 |
| PPLT00467-P | 0-10V Dimming to 1.0% | 120-277VAC to 500mA, 50W, Class 2, DAMP | 1-4 |
| PPLT00561-P500 | 0-10V Dimming to 0.1% | 120-277VAC to 500mA, 100W, Class 2 | 1-4 |

Suggested Lutron Compatible


| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| PPLT00259 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 10W, Class 2 | 1-1 |
| PPLT00195 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 19W, Class 2 | 2-3 |
| PPLT00676 | PEQ0E | PEQ0 | 100%-0.1% | Hi-Lume Premier 0.1% EcoSystem™ LED Driver | 120-277VAC to 500mA, 20W, Class 2 | 1-3 |
| PPLT00180 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 27W, Class 2 | 3-4 |

For other power supply options consult factory.


ACCESSORIES - Installation



PT51810_
Outer Casing
Ø4.13" base x 4.72" h
Add one of the finish codes below:
N - Inox Natural
G - Inox Graphite
B - Inox Bronze




PT40004
Bottom Cap
Ø4.72"

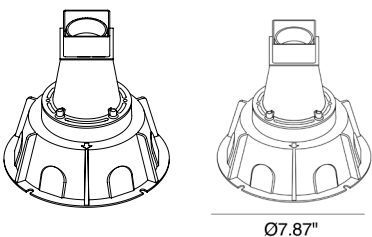

PT51811_
Outer Casing
Ø7.87" base x 7.68" h
Add one of the finish codes below:
N - Inox Natural
G - Inox Graphite
B - Inox Bronze



PT40003
Bottom Cap
Ø7.68"

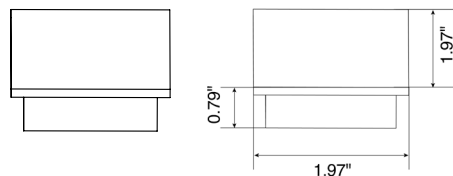

PT40008
Mortar Cap
1.97" x 1.97"

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

NOTE: All photometry is 3000K

Maximum Candela = 61.6

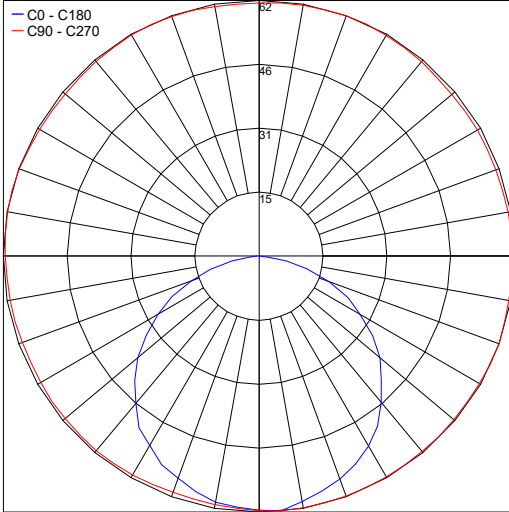

PHOTOMETRIC FILENAME : VLAK S-50 3000K - PT3015034.JES

Job Name/Date:

Fixture Type Designation: