


DRIVE LINE (L704X)

Drive Line L704X is a customized, flexible linear (curved on request) IP68-rated LED luminaire, made in AISI 316L stainless steel, for flush installation on floors in indoor or outdoor areas. It is walkover rated, and available in custom length, max 9.5 feet, and custom curvatures on request to follow every project. It is available in static or tunable white, RGB and RGBW and diffused optics. **Not cuttable in the field.**

TECHNICAL DATA

Wattage	22W per 3.3 ft (1m) - Static White 12W per 3.3 ft (1m) - Tunable White 15W per 3.3 ft (1m) - RGB 18W per 3.3 ft (1m) - RGBW
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: AISI 316L Stainless Steel Lens / Diffuser: Opal Polyurethane Resin Cable Length: 3.28' included
CCT	2200K, 2700K, 3000K, 3500K, 4000K, 4500K, 5500K, Tunable: 2900K-5900K, RGB, RGBW
CRI	>90 (Static, Tunable); 80 (RGB, RGBW)
Delivered Lumens	790 lm / 3.28' (3500K) 780 lm / 3.28' (Tunable White) 375 lm / 3.28' (RGB) 450 lm / 3.28' (RGBW)
Efficacy	35.9 lm/W per 3.28' (3000K) 65.0 lm/W per 3.28' (Tunable White) 25.0 lm/W per 3.28' (RGB) 25.0 lm/W per 3.28' (RGBW)
Optics	Diffuse
Fixture Dimensions	1.02" x 1.26" h x Various Lengths (max 9.5 ft)
LED Source	SMD 3014 SHINEON - Static, Tunable SMD 5050 PROLIGHT - RGB, RGBW
LED Spacing	408 LED per 3.28 ft (1 m)
Lumen Maintenance	L80, B10>50,000 hrs
Color Consistency	3-Step MacAdam
Operating Temp	-22°F to 131°F
IP Rating	IP68
Impact Resistance	IK10

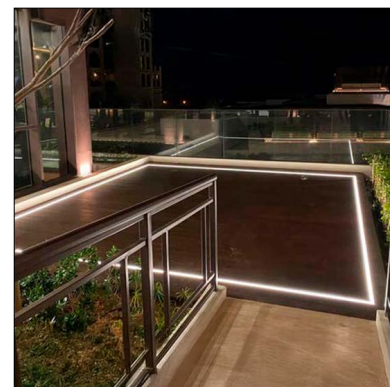

NOTE: Client should submit detailed dimension drawing for each project.

NOT CUTTABLE IN THE FIELD

ORDERING INFORMATION

Example: L704X-2x10.V5.24.68.F.2.Z-US. Power Supplies / Accessories ordered separately.

L704X	-		.	24	.	68	.	F	.	2.Z	-	US
-------	---	--	---	----	---	----	---	---	---	-----	---	----

Model No.	CCT		Power	IP Rating		Cable	
L704X - Drive Line	2x10.V8 - 2200K	2x10.W5 - 4500K	24 - 24VDC	68 - IP68	F	2.Z -	US
NOTE: Client should submit detailed dimension drawing for each project.	2x10.V2 - 2700K	2x10.N - 5500K				Standard	
	2x10.V5 - 3000K	TW2 - 2900K-5400K				Cable, Rear	
	2x10.V - 3500K	RGB4 - RGB				Exit	
	2x10.W - 4000K	RGB4W - RGBW					

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC - **TO BE USED WITH FOUNTAIN / SWIMMING POOLS**

Part Number	Description	Input/Output	# of Fixtures
FPV-100100024	0-10V Dimming (2 Channels)	120-277VAC to 24VDC, 100W, Class 2, NEMA 4	1 every 10 ft

SUGGESTED POWER SUPPLIES

24VDC - **TO BE USE FOR INDOOR/OUTDOOR USE - NOT** Fountain / Swimming Pool




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1 every 10 ft


For other power supply options consult factory.

ACCESSORIES - Cable Type




SP-CA-68-2-1 (Static White)

Water immersion / Outdoor power cable
IP68, Black (2x0.50mm2+ n. 2 Kevlar wires)
External Ø0.21".



SP-CA-68-4-1 (Tunable White)


Water immersion / Outdoor power cable
IP68, Black (4x0.50mm2+ n. 2 Kevlar wires)
External Ø0.23".



SP-CA-68-5-1 (RGBW)


Water immersion / Outdoor power cable
IP68, Black (5x0.50mm2+ n. 2 Kevlar wires)
External Ø0.24".

ACCESSORIES - Installation




L704X-GF

AISI 316 L steel outercase 1.2" x 1.3"
for L704X drive over model



L704-GF


ABS mounting outercase
for L704X walkable model



Job Name/Date:


Fixture Type Designation:

ACCESSORIES - Installation



L704-GF-TP

Pair of caps
or L704 ABS walkable outercase



L704-GF-OR


Linear joint
or L704 ABS walkable outercase



LLL.381.A2A.R

2-Pin Micro Inline Connector
used for fixture connection


INSTALLATION - Composition Example

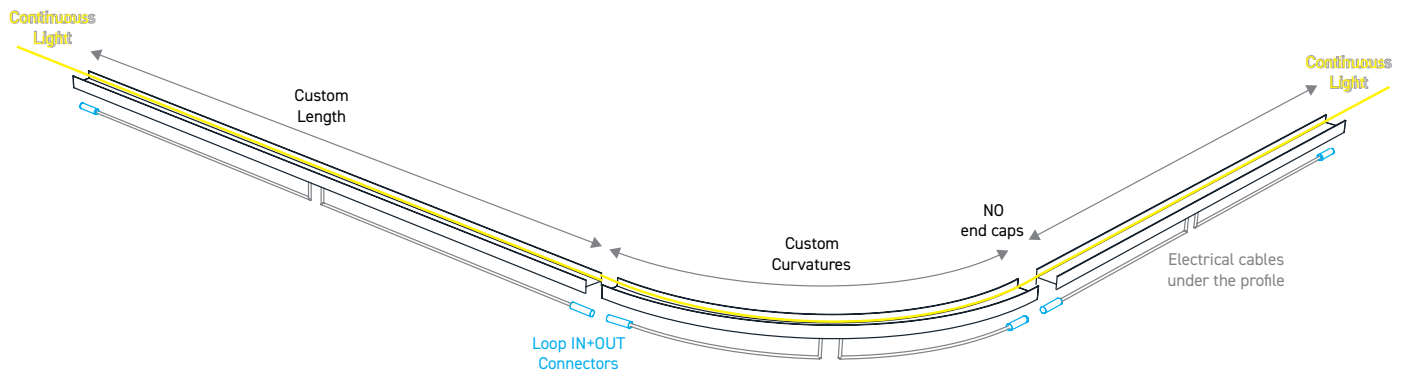

PHOTOMETRIC DATA

Coming Soon

STANDARD WIRE FEED (see ordering matrix)



Z. Back feed

Job Name/Date:

Fixture Type Designation: