

GLER SUN BOLLARD BI

Gler Sun is a family of modern, minimalist, lantern-like luminaires that come in 3 styles: wall, ceiling or a bollard in mono- or bi-directional light emission. Gler Sun Bollard Bi offers double light emission and is available in 2 heights - 19.7" or 31.5" - with transparent or sandblasted glass tube. It comes in 2 color temperatures and 7 standard finishes.




TRANSPARENT GLASS



SANDBLASTED GLASS

Fixture Dimensions

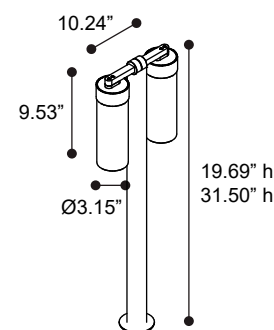

TECHNICAL DATA

Wattage	2 x 10W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Aluminum Alloy Lens: Sandblasted or Transparent Glass
CCT	2700K, 3000K
CRI	>90
BUG Rating	B1-U1-G0 (3000K, Transparent Glass) B0-U3-G1 (3000K, Sandblasted Glass)
Delivered Lumens	383 lm per beam (3000K)
Efficacy	38.3 lm/W per beam
Optics	Diffuse
Finishes	7 Standard, See Below
Fixture Dimensions	Heads: Ø3.15" x 9.53 h x 10.24" w Height: 19.69" or 31.50"
LED Source	Mid Power LEDs
IP Rating	IP65

ORDERING INFORMATION

Example: D902331112.US. Power Supplies ordered separately.

D9023				US
Model #	CCT	Glass	Finish	
D9023	31 - 2700K 11 - 3000K	08 - Transparent Glass, 19.7" h 09 - Transparent Glass, 31.5" h 10 - Sandblasted Glass, 19.7" h 11 - Sandblasted Glass, 31.5" h	2 - White 9 - Bronze 1 - Black 8 - Corten 5 - Aluminum 4 - Graphite 3 - Sand	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures per beam
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-3 (1-6 total)
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8 (1-16 total)

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures per beam
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-8 (1-16 total)

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures per beam
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-8 (1-16 total)

*For other power supply options consult factory.***PHOTOMETRIC DATA - Note: All photometry is 3000K**

19.7 in - Clear Lens


Maximum Candela = 599.8

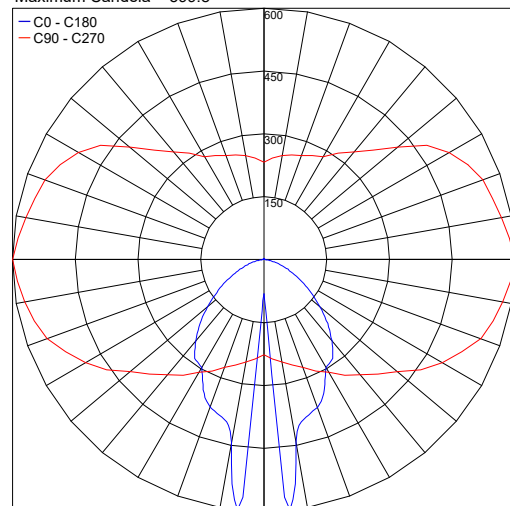

PHOTOMETRIC FILENAME : GLER-SUN-BOLLARD-3000K-CLEAR-DOUBLE-19.7IN_90231108_IJS

31.5 in - Clear Lens

Maximum Candela = 599.8

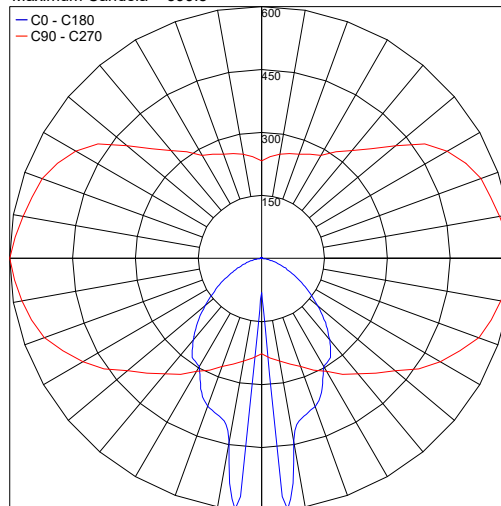

PHOTOMETRIC FILENAME : GLER-SUN-BOLLARD-3000K-CLEAR-DOUBLE-31.5IN_90231109_IJS


*Job Name/Date:**Fixture Type Designation:*

PHOTOMETRIC DATA - Note: All photometry is 3000K

19.7 in - Sandblasted Lens

Maximum Candela = 381.2

— C0 - C180
— C90 - C270

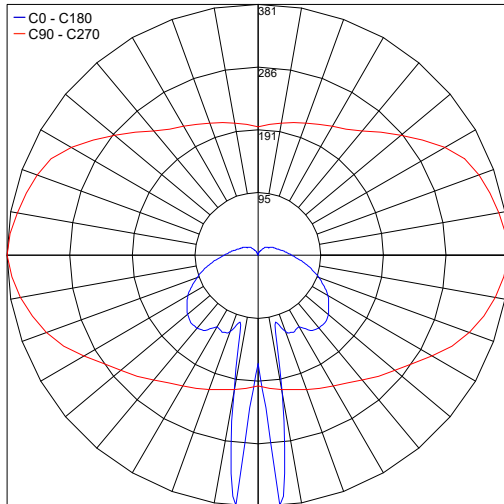


PHOTOMETRIC FILENAME : GLER-SUN-BOLLARD-3000K-OPAL-DOUBLE-19.7IN_90231110_IES

31.5 in - Sandblasted Lens

Maximum Candela = 381.2

— C0 - C180
— C90 - C270

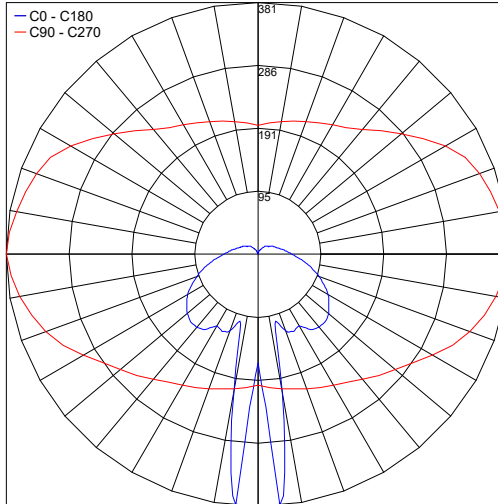

PHOTOMETRIC FILENAME : GLER-SUN-BOLLARD-3000K-OPAL-DOUBLE-31.5IN_90231111_IES

Job Name/Date:

Fixture Type Designation: