

Gler Sun is a family of modern, minimalist, lantern-like luminaires that come in 3 styles: wall, ceiling or a bollard in mono- or bi-directional light emission. Gler Sun Wall is the wall mounted version and offers down light emission. It is available with transparent or sandblasted glass tube and comes in 2 color temperatures and 7 standard finishes.



TRANSPARENT GLASS




SANDBLASTED GLASS

## TECHNICAL DATA

<b>Wattage</b>	10W
<b>Power Supply</b>	Remote 24VDC, not included. See page 2
<b>Construction</b>	Body: Aluminum Alloy Lens: Sandblasted or Transparent Glass
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>90
<b>BUG Rating</b>	B0-U1-G0 (3000K, Transparent Glass) B0-U2-G1 (3000K, Sandblasted Glass)
<b>Delivered Lumens</b>	383 lm (3000K)
<b>Efficacy</b>	38.3 lm/W
<b>Optics</b>	Diffuse
<b>Finishes</b>	7 Standard, See Below
<b>Fixture Dimensions</b>	Ø3.15" x 5.71" w x 11.02" h
<b>LED Source</b>	Mid Power LEDs
<b>IP Rating</b>	IP65

Fixture Dimensions

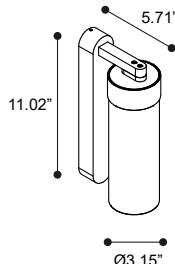

## ORDERING INFORMATION

Example: D902331002.US. Power Supplies ordered separately.

D9023				.	US
<b>Model #</b>	<b>CCT</b>	<b>Glass</b>	<b>Finish</b>		
D9023	31 - 2700K 11 - 3000K	00 - Transparent Glass 01 - Sandblasted Glass	2 - White 9 - Bronze 1 - Black 8 - Corten 5 - Aluminum 4 - Graphite 3 - Sand	US	

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-8

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-8

For other power supply options consult factory.

## PHOTOMETRIC DATA - Note: All photometry is 3000K

Clear Lens


Maximum Candela = 290.5

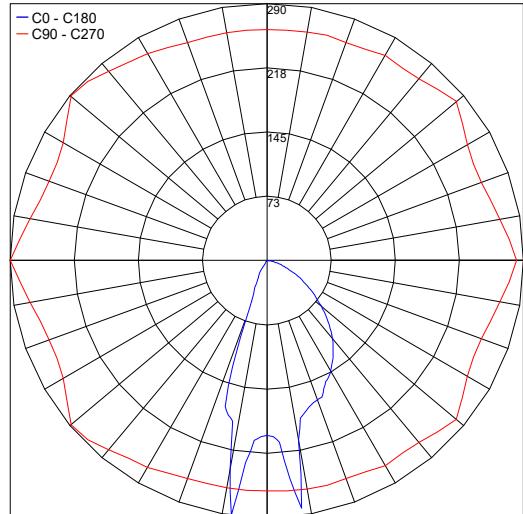

PHOTOMETRIC FILENAME : GLER-SUN-WALL-3000K-CLEAR-GLASS\_90231100\_.IES

Sandblasted Lens

Maximum Candela = 192.4

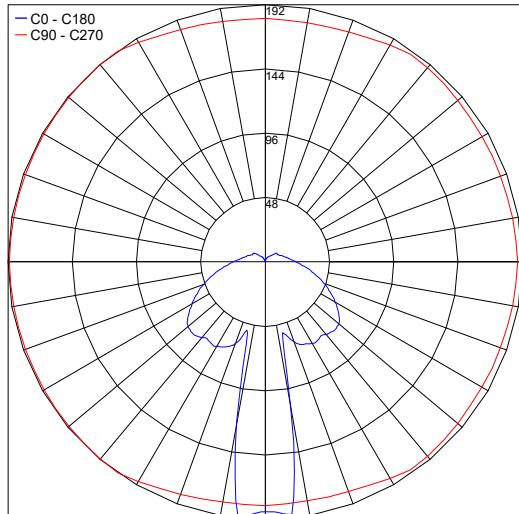

PHOTOMETRIC FILENAME : GLER-SUN-WALL-3000K-OPAL-GLASS\_90231101\_.IES

Job Name/Date:

Fixture Type Designation: