

KOS SPOTLIGHT RGBW


KOS is a family of versatile, small boxlike fixtures that comes as a recessed downlight, in-grade uplight, wall mounted, or floodlight for installation in outdoor environments. KOS Spotlight RGBW is outdoor floodlight available with RGB+W light, 5 optics options and 2 standard finishes.



TECHNICAL DATA

Wattage	12W
Power Supply	Remote - Consult Factory
Construction	Body: Anticorodal Aluminum Lens: Extra Clear Tempered Glass
CCT	RGBW
BUG Rating	—
Delivered Lumens	333 lm: (R) 44 lm, (G) 27 lm, (B) 110 lm, (W) 152 lm (6500K)
Efficacy	27.8 lm/W: (R) 3.7 lm/W lm, (G) 2.3 lm/W, (B) 9.2 lm/W, (W) 12.7 lm (6500K)
Optics	10°, 25°, 45°, 10°x40°, 40°x10°
Finishes	Anthracite, ALU Gray (RAL9006)
Lumen Maintenance	90,000 hrs, L90 (Ta 35°C)
Fixture Dimensions	2.99" l x 3.66" w x 2.99" h
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

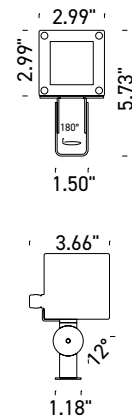

ORDERING INFORMATION

Example: F40506.1.5.01.US. Power Supplies / Accessories ordered separately.

F40507		5		US
Model No.	Finish	CCT	Optics	
F40507 - RGBW PRO	1 - Anthracite 4 - ALU Gray (RAL9006)	5 - RGB+W	01 - Spot 10° 36 - Medium 25° 32 - Wide 45° 38 - 10°x 40° 70 - 40°x 10°	US

Job Name/Date:



Fixture Type Designation:

SUGGESTED POWER SUPPLIES

Remote - Consult Factory


ACCESSORIES

Installation / Anti-Glare



A9903

Stainless Steel Peg




A0503_

Aluminum Visor

1 - Anthracite

4 - ALU Gray (RAL 9006)

Order together with the product




A0003

Anchoring Bolt

L = 6.56 ft

ACCESSORIES

Controllers (RGBW)

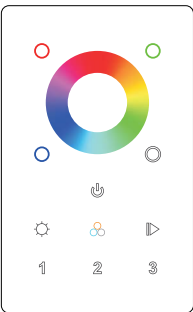

PPWD00570 - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: