

# LUNA LIGHT BLADE PRO


Luna is a family of small recessed wall or in-grade uplights that offers a solution to a number of architectural settings with easy installation and blade or diffuse optics. Luna Light Blade Pro offers 3° X 110° blade optics in RGBW light with on board DMX and 2 standard finishes.



## TECHNICAL DATA

|                           |                                                                            |
|---------------------------|----------------------------------------------------------------------------|
| <b>Wattage</b>            | 7W                                                                         |
| <b>Power Supply</b>       | Remote 24VDC, not included. See page 2<br>On-board DMX                     |
| <b>Construction</b>       | Body: Anticorodal Aluminum<br>Lens: Polycarbonate                          |
| <b>CCT</b>                | RGBW                                                                       |
| <b>BUG Rating</b>         | —                                                                          |
| <b>CRI</b>                | >80                                                                        |
| <b>Delivered Lumens</b>   | 394 lm: (R) 42 lm, (G) 154 lm, (B) 25 lm,<br>(W) 173 lm (6500K)            |
| <b>Efficacy</b>           | 56.3 lm/W: (R) 6 lm/W, (G) 22 lm/W,<br>(B) 3.6 lm/W, (W) 24.7 lm/W (6500K) |
| <b>Optics</b>             | 3°x110°                                                                    |
| <b>Finishes</b>           | Matte Black, Anodized Aluminum                                             |
| <b>Lumen Maintenance</b>  | L90, 60,000 hrs (Ta 35°C)                                                  |
| <b>Fixture Dimensions</b> | Ø2.76" x 2.83" h                                                           |
| <b>Aperture</b>           | 0.60"                                                                      |
| <b>IP Rating</b>          | IP66                                                                       |
| <b>Impact Resistance</b>  | IK08                                                                       |

Fixture Dimensions

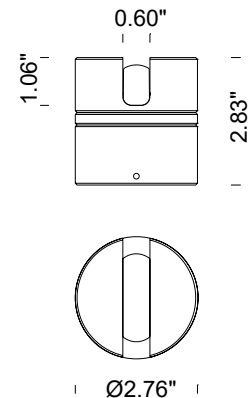

## ORDERING INFORMATION

Example: F13014.3.5.71.US. Power Supplies ordered separately.

|                  |                                          |            |               |     |
|------------------|------------------------------------------|------------|---------------|-----|
| F13014           |                                          | 5          | 71            | .US |
| <b>Model No.</b> | <b>Finish</b>                            | <b>CCT</b> | <b>Optics</b> |     |
| F13014           | 3 - Matte Black<br>5 - Anodized Aluminum | 5 - RGBW   | 71 - 3°x110°  | .US |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC - Non Dim Drivers

| Part Number               | Description | Input/Output                            | # of Fixtures |
|---------------------------|-------------|-----------------------------------------|---------------|
| <a href="#">PPLT00056</a> | Non-Dim     | 120-277VAC to 24VDC, 26W, Class 2, IP66 | 1-2           |
| <a href="#">PPLT00691</a> | Non-Dim     | 120-277VAC to 24VDC, 60W, Class 2, IP67 | 1-6           |
| <a href="#">PPLT00578</a> | Non-Dim     | 120-277VAC to 24VDC, 96W, Class 2, WET  | 1-10          |

*For other power supply options consult factory.*

Job Name/Date:

Fixture Type Designation: