

LUNA LIGHT BLADE PRO


Luna is a family of small facade floodlight or recessed wall that offers a solution to a number of architectural settings with easy installation and blade or diffuse optics. Luna Light Blade Pro offers 3° X 110° blade optics in RGBW light with on board DMX and 2 standard finishes.



TECHNICAL DATA

Wattage	7W
Power Supply	Remote 24VDC, not included. See page 2 On-board DMX
Construction	Body: Anticorodal Aluminum Lens: Polycarbonate
CCT	RGBW
BUG Rating	-
CRI	>80
Delivered Lumens	394 lm: (R) 42 lm, (G) 154 lm, (B) 25 lm, (W) 173 lm (6500K)
Efficacy	56.3 lm/W: (R) 6 lm/W, (G) 22 lm/W, (B) 3.6 lm/W, (W) 24.7 lm/W (6500K)
Optics	3°x110°
Finishes	Matte Black, Anodized Aluminum
Lumen Maintenance	L90, 60,000 hrs (Ta 35°C)
Fixture Dimensions	Ø2.76" x 2.83" h
Aperture	0.60"
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

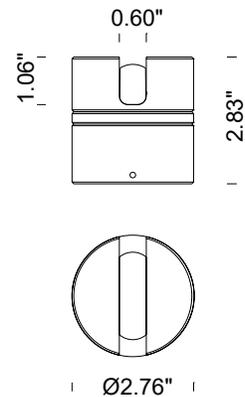

ORDERING INFORMATION

Example: F13014.3.5.71.US. Power Supplies ordered separately.

F13014	.		.	5	.	71	.	.US
Model No.	Finish	CCT	Optics					
F13014	3 - Matte Black 5 - Anodized Aluminum	5 - RGBW	71 - 3°x110°	.US				

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC - Non Dim Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-2
PPLT00691	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-6
PPLT00578	Non-Dim	120-277VAC to 24VDC, 96W, Class 2, WET	1-10

For other power supply options consult factory.

ACCESSORIES

Controllers (RGBW)



[PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: