

LUNA DIFFUSED PRO


Luna is a family of small recessed wall or in-grade uplights that offers a solution to a number of architectural settings with easy installation and blade or diffuse optics. Luna Diffused Pro offers diffuse optics in RGBW light with on board DMX and 2 standard finishes.

TECHNICAL DATA

Wattage	7W
Power Supply	Remote 24VDC, not included. See page 2. On-board DMX
Construction	Body: Anticorodal Aluminum Lens: Polycarbonate
CCT	RGBW
BUG Rating	–
CRI	>80
Delivered Lumens	83 lm: (R) 12 lm, (G) 33 lm, (B) 9 lm, (W) 29 lm (6500K)
Efficacy	11.9 lm/W: (R) 2.4 lm/W, (G) 6.6 lm/W, (B) 1.8 lm/W, (W) 5.8 lm/W (6500K)
Optics	Diffuse
Finishes	Matte Black, Anodized Aluminum
Lumen Maintenance	L90, 60,000 hrs (Ta 35°C)
Fixture Dimensions	Ø2.76" x 2.83" h
Aperture	1.66"
IP Rating	IP66
Impact Resistance	IK08



Fixture Dimensions

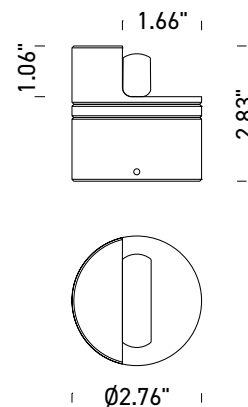

ORDERING INFORMATION

Example: F13016.3.5.05.US. Accessories ordered separately.

F13016		5	05	.US
Model No.	Finish	CCT	Optics	
F13016	3 - Matte Black 5 - Anodized Aluminum	5 - RGBW	05 - Diffuse	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC - Non Dim Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-2
PPLT00691	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-6
PPLT00578	Non-Dim	120-277VAC to 24VDC, 96W, Class 2, WET	1-10

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: