




203004P

LINE 21

Linear ground-recessed luminaire for outdoor installation, length 38.78", Phospho-chromatised and polyester powder coated extruded copper-free aluminum body and stainless steel AISI 304 frame, tempered safety glass, moulded silicone gasket. Built-in LED driver 120-277VAC 50-60Hz, with 21 CREE XP-G3 LED. IP67 rating.

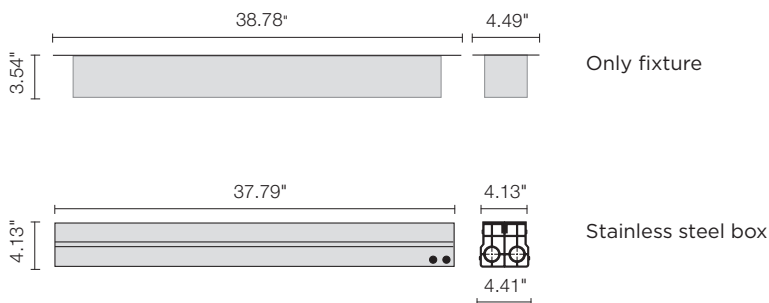

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	3,024	96.00
high-power led	30°	2,873	91.25
high-power led	45°	2,729	86.67
high-power led	Asymmetric Wall-Washer	2,873	91.25
4000°K neutral-white			
high-power led	10°	3,150	100.00
high-power led	30°	2,993	95.00
high-power led	45°	2,843	90.25
high-power led	Asymmetric Wall-Washer	2,993	95.00

Finish color options:

 Stainless Steel

Technical features



Technical data

Wattage	31.5W
IP Rating	IP67
IK Rating	IK10
Material	High corrosion resistance extruded copper-free aluminum body
Trim	Stainless steel AISI 304
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 21 x 1.5W CREE "XP-G3" LED
Special optics	"invisa-light" technology
Screws	Stainless steel
Recessing sleeve	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Static weight resistance	11,023.11 lbs
Gasket	Silicone rubber
Glass	Tempered
Cord Grip	Double PG13.5
Power cable	3.28' neoprene power cable included
Gross weight	22.1 lbs

When installing Hydroline, a "drainage bed" of at least 7.87" has to be observed under the stainless steel recessing box (gravel and sand)

